



Driven by **PERFORMANCE™**

# PRODUCT CATALOG

RESIDENTIAL | COMMERCIAL | INDUSTRIAL

---

PRESSURE WASHERS | MOBILE TRAILERS | PORTABLE GENERATORS & INVERTERS | HOSES | ACCESSORIES | PUMPS

---





## THE SIMPSON® ADVANTAGE

Driven by Performance™ for more than 50 years, SIMPSON continues to provide the advantage you need to get the job done right every time. We design, engineer and manufacture products that are reliable, durable, and built to perform every time you need them. Whether you are a DIYer or an industry pro, SIMPSON offers an enhanced experience with professional results guaranteed. Join the historic journey and take the ADVANTAGE!

## TABLE OF CONTENTS

<b>PG 3</b>	<b>RESIDENTIAL PRESSURE WASHERS</b>
PG 4	CLEAN MACHINE® SERIES
<b>PG 5</b>	<b>PREMIUM RESIDENTIAL PRESSURE WASHERS</b>
PG 6-7	MEGASHOT™ SERIES
<b>PG 8</b>	<b>COMMERCIAL PRESSURE WASHERS</b>
PG 9	POWERSHOT™ SERIES
PG 10	PRO SERIES
PG 10	ALUMINUM SERIES
PG 11	ALUMINUM WATER BLASTER® SERIES
PG 11	WATER BLASTER® SERIES
<b>PG 12</b>	<b>INDUSTRIAL PRESSURE WASHERS</b>
PG 13	WATER SHOTGUN® SERIES
PG 14	INDUSTRIAL SERIES
PG 14	RENTAL SERIES
PG 15-16	SANITIZING MISTER
PG 17-18	SUPER PRO ROLL CAGE SERIES
<b>PG 19</b>	<b>HOT WATER PRESSURE WASHERS</b>
PG 20	BRUTE SERIES
<b>PG 21-22</b>	<b>TRAILER MOUNTED PRESSURE WASHERS</b>
<b>PG 23-24</b>	<b>PREMIUM PORTABLE &amp; INVERTER GENERATORS</b>
PG 25-26	COMMERCIAL SERIES
PG 27-28	INDUSTRIAL SERIES
PG 29-30	INVERTER GENERATORS AND PARALLEL BOX
<b>PG 31-32</b>	<b>PREMIUM PORTABLE TRASH PUMPS</b>
<b>PG 33-37</b>	<b>HIGH PERFORMANCE HOSES</b>
<b>PG 38</b>	<b>PROFESSIONAL CLEANING SOLUTIONS</b>
<b>PG 39-41</b>	<b>PREMIUM ACCESSORIES</b>
<b>PG 42</b>	<b>POWERBOOST® &amp; LOW OIL SHUTDOWN TECHNOLOGY</b>
<b>PG 43-44</b>	<b>PRESSURE WASHER PUMP KITS</b>
<b>PG 45</b>	<b>SIMPSON® INFORMATION</b>
PG 45	BECOME A DEALER
PG 45	CETA® TESTING STANDARDS



# RESIDENTIAL PRESSURE WASHERS

The combination of lightweight portable frames, OEM axial cam pumps, and powerful electric motors or gas engines make the residential pressure washers perfect for any cleaning job around the house.

## RESIDENTIAL PRESSURE WASHERS

### CLEAN MACHINE® SERIES



MODEL NUMBER	CM60976(-S)
PART NUMBER	60976 (61016)
PRESSURE RATING	2300 PSI
FLOW RATING	1.2 GPM
ENGINE	SIMPSON® 120V Electric Motor
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22
TIRE/WHEEL	10" Never-flat
LIMITED WARRANTY	1 yr Frame, 1yr Pump, 1yr Motor



MODEL NUMBER	CM61083-S
PART NUMBER	(61083)
PRESSURE RATING	3400 PSI
FLOW RATING	2.5 GPM
ENGINE	CRX® 208cc
PUMP	OEM Technologies™ Axial Cam
HOSE	5/16" x 25' x M22
TIRE/WHEEL	10" Premium Pneumatic
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine



MODEL NUMBER	CM61135(-S)
PART NUMBER	(61135)
PRESSURE RATING	2800 PSI
FLOW RATING	2.3 GPM
ENGINE	CRX® 163cc
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, HyFlex™
TIRE/WHEEL	12" Never-flat
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine



MODEL NUMBER	CM61117
PART NUMBER	61117
PRESSURE RATING	3300 PSI
FLOW RATING	2.4 GPM
ENGINE	KOHLER® SH Series
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, HyFlex™
TIRE/WHEEL	10" Premium Pneumatic
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine



MODEL NUMBER	CM61118
PART NUMBER	61118
PRESSURE RATING	3500 PSI
FLOW RATING	2.5 GPM
ENGINE	KOHLER® SH Series
PUMP	AAA® AX300 PRO Axial
HOSE	5/16" x 25' x M22, MorFlex®
TIRE/WHEEL	10" Premium Pneumatic
LIMITED WARRANTY	5yr Frame, 2yr Pump, 2yr Engine

(-S) Indicates shippable packaging.

LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.

Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)



POWERED by  
SIMPSON. POWERED BY  
KOHLER.



# PREMIUM RESIDENTIAL PRESSURE WASHERS

Designed for the do-it-yourselfer that needs a bit more out of a residential pressure washer, our premium residential pressure washers are ready to take on the toughest home projects.

Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)



## PREMIUM RESIDENTIAL PRESSURE WASHERS

### MEGASHOT™ SERIES

GAS POWERED



**BONUS!**  
Includes on board soap tank



MODEL NUMBER	<b>MS60773(-S)</b>
PART NUMBER	<b>60773 (60784)</b>
PRESSURE RATING	2800 PSI
FLOW RATING	2.3 GPM
ENGINE	HONDA® GCV160
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	12" Never-flat
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine



MODEL NUMBER	<b>MS61114(-S)</b>
PART NUMBER	<b>61114 (61114S)</b>
PRESSURE RATING	2800 PSI
FLOW RATING	2.3 GPM
ENGINE	KOHLER® GTX675 (Lifetime no oil change)
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, HyFlex™
TIRE/WHEEL	12" Never-flat
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine



MODEL NUMBER	<b>MS61039 (MS60809-S)</b>
PART NUMBER	<b>61039 (60809)</b>
PRESSURE RATING	3000 PSI
FLOW RATING	2.4 GPM
ENGINE	HONDA® GCV160
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	12" Never-flat
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine

(-S) Indicates shippable packaging.

**BONUS!**  
Includes 15" steel surface cleaner & on board soap tank



MODEL NUMBER	<b>MS60805(-S)</b>
PART NUMBER	<b>(60808)</b>
PRESSURE RATING	3000 PSI
FLOW RATING	2.4 GPM
ENGINE	HONDA® GCV160
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	12" Never-flat
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine

(-S) Indicates shippable packaging.

**BONUS!**  
Includes 5-N-1 Nozzle



MODEL NUMBER	<b>MS61043(-S)*</b> <small>LOW OIL SHUTDOWN</small>
PART NUMBER	<b>61043 (61066)</b>
PRESSURE RATING	3000 PSI
FLOW RATING	2.4 GPM
ENGINE	SIMPSON® 212cc
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	10" Premium Pneumatic
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine

\*Contact a Sales Representative for availability  
See page 45 for information.  
\*50 State Compliant

**BONUS!**  
Includes 5-N-1 Nozzle



MODEL NUMBER	<b>MS61043(-S)*</b> <small>LOW OIL SHUTDOWN</small>
PART NUMBER	<b>61106 (61107)</b>
PRESSURE RATING	3000 PSI
FLOW RATING	2.4 GPM
ENGINE	SIMPSON® 208cc
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	10" Premium Pneumatic
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine

\*Contact a Sales Representative for availability  
See page 45 for information.  
\*49 State Compliant



PREMIUM RESIDENTIAL PRESSURE WASHERS

MEGASHOT™ SERIES



MODEL NUMBER	MS60763(-S)	MS31025HT	MSH3125-S	MS61049(-S)*
PART NUMBER	(60763)	60652	60551	61049 (61062)
PRESSURE RATING	3100 PSI	3200 PSI	3200 PSI	3300 PSI
FLOW RATING	2.4 GPM	2.5 GPM	2.5 GPM	2.4 GPM
ENGINE	KOHLER® RH265	HONDA® GC190	HONDA® GC190	HONDA® GC190
PUMP	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®	1/4" x 25' x M22, MorFlex®	1/4" x 25' x M22, MorFlex®	1/4" x 35' x M22, MorFlex®
TIRE/WHEEL	12" Never-flat	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine	5yr Frame, 1yr Pump, 2yr Engine	5yr Frame, 1yr Pump, 2yr Engine	5yr Frame, 1yr Pump, 2yr Engine

\*Contact a Sales Representative for availability  
See page 45 for information.

**BONUS!**  
Includes 15" steel  
surface cleaner



MODEL NUMBER	MS61033-S	MS60921	MS61124(-S) <small>LOW OIL SHUTDOWN</small>	MS61084(-S) <small>LOW OIL SHUTDOWN</small>
PART NUMBER	61033	60921	61124	61084 (61085)
PRESSURE RATING	3300 PSI	3300 PSI	3400 PSI	3400 PSI
FLOW RATING	2.4 GPM	2.4 GPM	2.4 GPM	2.5 GPM
ENGINE	HONDA® GC190	HONDA® GC190	KOHLER® SH Series	KOHLER® SH Series
PUMP	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®	1/4" x 25' x M22, MorFlex®	1/4" x 35' x M22, MorFlex®	5/16" x 25' x M22, MorFlex®
TIRE/WHEEL	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic
LIMITED WARRANTY	5yr Frame, 1yr Pump, 2yr Engine	5yr Frame, 1yr Pump, 2yr Engine	5yr Frame, 1yr Pump, 3yr Engine	5yr Frame, 1yr Pump, 2yr Engine

(-S) Indicates shippable packaging.

COMMERCIAL PRESSURE WASHERS



Our commercial pressure washers are perfect for professionals who take on jobs a bit larger than the ones found around the house.



Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)



COMMERCIAL PRESSURE WASHERS

POWERSHOT™ SERIES

GAS POWERED



**BONUS!**  
Includes 15" steel  
surface cleaner



MODEL NUMBER	PS3228-S	PS61002(-S)	PS61115(-S)	PS60995(-S)
PART NUMBER	60629	61002 (61014)	61115	60995 (60996)
PRESSURE RATING	3300 PSI	3500 PSI	3500 PSI	3600 PSI
FLOW RATING	2.5 GPM	2.5 GPM	2.5 GPM	2.5 GPM
ENGINE	HONDA® GX200	HONDA® GX200	KOHLER® SH Series	HONDA® GX200
PUMP	AAA™ Triplex	AAA™ AX300 Axial Cam	AAA™ AX300 Axial Cam	AAA™ Triplex
HOSE	5/16" x 25' x M22, MorFlex®	5/16" x 25' x M22, MorFlex®	5/16" x 25' x M22, MorFlex®	5/16" x 25' x M22, MorFlex®
TIRE/WHEEL	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 5yr Pump, 3yr Engine	10yr Frame, 2yr Pump, 3yr Engine	10yr Frame, 2yr Pump, 3yr Engine	10yr Frame, 5yr Pump, 3yr Engine

COMMERCIAL PRESSURE WASHERS

PRO SERIES

GAS POWERED



VISIT [WWW.SIMPSONCLEANING.COM/EPP](http://WWW.SIMPSONCLEANING.COM/EPP) FOR DETAILS



MODEL NUMBER	PS61044(-S)	PS61042	PS60982(-S)	PS60918
PART NUMBER	61044 (61064)	61042	60982 (61000)	60918
PRESSURE RATING	3400 PSI	3400 PSI	3700 PSI	4000 PSI
FLOW RATING	2.3 GPM	2.5 GPM	2.5 GPM	3.5 GPM
ENGINE	HONDA® GS190	BRIGGS & STRATTON® CRX950	HONDA® GX200	HONDA® GX270
PUMP	AAA™ AX300 PRO Axial	AAA™ AX300 PRO Axial	AAA™ Triplex	AAA™ Triplex
HOSE	5/16" x 25' x M22, MorFlex®	5/16" x 25' x M22, MorFlex®	5/16" x 50' x M22, MorFlex®	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic	13" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 5yr Pump, 3+2yr Engine	10yr Frame, 5yr Pump, 3+2yr Engine	10yr Frame, 5yr Pump, 3+2yr Engine	10yr Frame, 5yr Pump, 3+2yr Engine

ALUMINUM SERIES

GAS POWERED



MODEL NUMBER	PS60869	PS4240	PS60843
PART NUMBER	60869	60456	60843
PRESSURE RATING	4000 PSI	4200 PSI	4400 PSI
FLOW RATING	3.5 GPM	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX270	HONDA® GX390	SIMPSON® 420cc
PUMP	AAA™ Triplex	AAA™ Triplex	AAA™ Triplex
HOSE	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	13" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 5yr Pump, 3yr Engine	10yr Frame, 5yr Pump, 3yr Engine	10yr Frame, 5yr Pump, 3yr Engine

MODEL NUMBER	ALH3228-S	ALH3425-S	ALH4240
PART NUMBER	60735	60689	60688
PRESSURE RATING	3400 PSI	3600 PSI	4200 PSI
FLOW RATING	2.5 GPM	2.5 GPM	4.0 GPM
ENGINE	HONDA® GX200	HONDA® GX200	HONDA® GX390
PUMP	CAT PUMPS® Triplex	AAA™ Triplex	CAT PUMPS® Triplex
HOSE	5/16" x 25' x QC, Steel-braided Monster	5/16" x 35' x M22, MorFlex®	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	10" Premium Pneumatic	10" Premium Pneumatic	13" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 5yr Pump, 3yr Engine	10yr Frame, 5yr Pump, 3yr Engine	10yr Frame, 5yr Pump, 3yr Engine

**LOW OIL SHUTDOWN** - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.

**POWER BOOST** - Indicates pump equipped with PowerBoost® Technology. See page 42 for details.  
(-S) Indicates shippable packaging.

**LOW OIL SHUTDOWN** - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.

**POWER BOOST** - Indicates pump equipped with PowerBoost® Technology. See page 42 for details.  
(-S) Indicates shippable packaging.



COMMERCIAL PRESSURE WASHERS

ALUMINUM WATER BLASTER® SERIES



LIGHTWEIGHT ALUMINUM FRAME!

LIGHTWEIGHT ALUMINUM FRAME!

LIGHTWEIGHT ALUMINUM FRAME!



MODEL NUMBER	ALWB60827	ALWB60828	ALWB60825
PART NUMBER	60827	60828	60825
PRESSURE RATING	4200 PSI	4200 PSI	4400 PSI
FLOW RATING	4.0 GPM	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX390	HONDA® GX390	SIMPSON® 420cc
PUMP	AAA™ Triplex	CAT PUMPS® Triplex	AAA™ Triplex
HOSE	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	13" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 5yr Pump, 3yr Engine	10yr Frame, 5yr Pump, 3yr Engine	10yr Frame, 5yr Pump, 3yr Engine

WATER BLASTER® SERIES



MODEL NUMBER	WB4200	WB60824
PART NUMBER	60205	60824
PRESSURE RATING	4200 PSI	4400 PSI
FLOW RATING	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX390	SIMPSON® 420cc
PUMP	AAA™ Triplex	AAA™ Triplex
HOSE	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	13" Premium Pneumatic	13" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 5yr Pump, 3yr Engine	10yr Frame, 5yr Pump, 3yr Engine

INDUSTRIAL PRESSURE WASHERS



Featuring high-performance, industrial-grade pumps and welded robust steel frames, these machines are built to take on the toughest industrial jobs.



Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)







# INDUSTRIAL PERFORMANCE

- **FEATURING HIGH PERFORMANCE, AAA™ OR COMET INDUSTRIAL GRADE PUMPS.**
- **EQUIPPED WITH A BOLT-ON EXTERNAL UNLOADER AND BYPASS HOSE.**
- **DURABLE HEAVY GAUGE FRAME DESIGN.**



## WATER SHOTGUN® SERIES

GAS POWERED



MODEL NUMBER	WS4050V
PART NUMBER	60242
PRESSURE RATING	4000 PSI
FLOW RATING	5.0 GPM
ENGINE	VANGUARD® V-Twin / E-Start
PUMP	COMET Premium Series
HOSE	3/8" x 50' x QC, R2 Wrapped Rubber
TIRE/WHEEL	13" Premium Aluminum
LIMITED WARRANTY	10yr Frame, 7yr Pump, 3yr Engine



MODEL NUMBER	WS5050H
PART NUMBER	60243
PRESSURE RATING	5000 PSI
FLOW RATING	5.0 GPM
ENGINE	HONDA® GX630 / E-Start
PUMP	COMET Premium Series
HOSE	3/8" x 50' x QC, R2 Wrapped Rubber
TIRE/WHEEL	13" Premium Aluminum
LIMITED WARRANTY	10yr Frame, 7yr Pump, 3yr Engine



Includes external fuel tank



# INDUSTRIAL PRESSURE WASHERS

## INDUSTRIAL SERIES

GAS POWERED



LOW OIL SHUTDOWN

- Featured on all units (Excludes electric and HONDA® GC models). See page 42 for details.



61129



61023



61026



61030



MODEL NUMBER	PART NUMBER	PRESSURE RATING	FLOW RATING	DRIVE	ENGINE/MOTOR	PUMP	TIRE/WHEEL	HOSE	LIMITED WARRANTY
IS61129	61129	1500 PSI	2.0 GPM	DIRECT	120V ELECTRIC	AAA™ Industrial Triplex	N/A- HANDHELD	3/8" x 25' x QC, Steel-braided Monster	5yr Pump, 1yr Motor
IS61023 <sup>1</sup>	61023	2700 PSI	2.7 GPM	DIRECT	HONDA® GC190	AAA™ AX300 PRO Axial	10" Foam Filled	5/16" x 50' x QC, Steel-braided Monster	10yr Frame, 3yr Pump, 2yr Engine
IS61022 <sup>1</sup>	61022	3000 PSI	2.7 GPM	DIRECT	HONDA® GX200	AAA™ AX300 PRO Axial	10" Foam Filled	5/16" x 50' x QC, Steel-braided Monster	10yr Frame, 3yr Pump, 3+2yr Engine
IS61024 <sup>2</sup>	61024	3000 PSI	3.0 GPM	DIRECT	HONDA® GX200	AAA™ Industrial Triplex	10" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 3+2yr Engine
IS61026 <sup>2</sup>	61026	3500 PSI	4.0 GPM	DIRECT	HONDA® GX270	AAA™ Industrial Triplex	13" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 3+2yr Engine
IS61028 <sup>2</sup>	61028	4400 PSI	4.0 GPM	DIRECT	HONDA® GX390	AAA™ Industrial Triplex	13" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 3+2yr Engine
IS61029 <sup>2</sup>	61029	4400 PSI	4.0 GPM	DIRECT	SIMPSON® 420cc	AAA™ Industrial Triplex	13" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 3+2yr Engine
IS61030 <sup>2</sup>	61030	4200 PSI	4.0 GPM	BELT	HONDA® GX390	COMET Industrial Triplex	13" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 3+2yr Engine

<sup>1</sup>Black welded heavy gauge steel frame, powdered coated for corrosion resistance.

<sup>2</sup>Ultra lightweight aircraft grade aluminum frame.



## RENTAL SERIES



LOW OIL SHUTDOWN

- Featured on all units (Excludes electric models). See page 42 for details.

### FEATURING:

- Steel dashboards with set up/use instructions
- Gas and 230V electric units with heavy-duty aluminum frames
- Gas and 230V electric units have bolt-on external unloader and bypass hose
- Digital hour meter
- Heavy-duty inlet filter
- Engine vibration dampeners
- Professional grade insulated trigger gun and lance



61094



61095



61096

LOW OIL SHUTDOWN

- Featured on all units (Excludes electric models). See page 42 for details.

MODEL NUMBER	PART NUMBER	PRESSURE RATING	FLOW RATING	DRIVE	ENGINE/MOTOR	PUMP	TIRE/WHEEL	HOSE	LIMITED WARRANTY
IR61094	61094	1500 PSI	2.0 GPM	DIRECT	120V ELECTRIC	AAA™ Industrial Triplex	8" Never-Flats	3/8" x 25' x QC, Steel-braided Monster	5yr Frame, 5yr Pump, 1yr Motor
IR61130	61130	2000 PSI	3.0 GPM	DIRECT	230V ELECTRIC	AAA™ Industrial Triplex	13" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 1yr Motor
IR61131	61131	2500 PSI	3.5 GPM	DIRECT	230V ELECTRIC	AAA™ Industrial Triplex	13" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 1yr Motor
IR61132	61132	3000 PSI	4.0 GPM	DIRECT	230V ELECTRIC	AAA™ Industrial Triplex	13" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 1yr Motor
IR61143	61143	2700 PSI	3.0 GPM	DIRECT	HONDA® GX200	AAA™ Industrial Triplex	10" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 3yr Engine
IR61095	61095	3000 PSI	3.0 GPM	DIRECT	HONDA® GX200	AAA™ Industrial Triplex	10" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 3yr Engine
IR61133	61133	3500 PSI	4.0 GPM	DIRECT	HONDA® GX270	AAA™ Industrial Triplex	13" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 3yr Engine
IR61134	61134	4400 PSI	4.0 GPM	DIRECT	SIMPSON® 420cc	AAA™ Industrial Triplex	13" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 3yr Engine
IR61096	61096	4400 PSI	4.0 GPM	DIRECT	HONDA® GX390	AAA™ Industrial Triplex	13" Foam Filled	3/8" x 50' x QC, Steel-braided Monster	10yr Frame, 7yr Pump, 3yr Engine





# INTRODUCING THE SM1200 ALL IN ONE

## Sanitizing Mister and Pressure Washing System




**VERSATILE:** The new Simpson SM1200 provides misting and powerful pressure washing all-in-one machine.

**PORTABLE:** The small, lightweight design is easy to maneuver and transport, so you can use the SM1200 inside or out.

**POWERFUL:** With its powerful self-priming supply pump, the SM1200 can draw water or chemicals vertically up to 5 feet.



## DESIGNED FOR INTERIOR & EXTERIOR USE

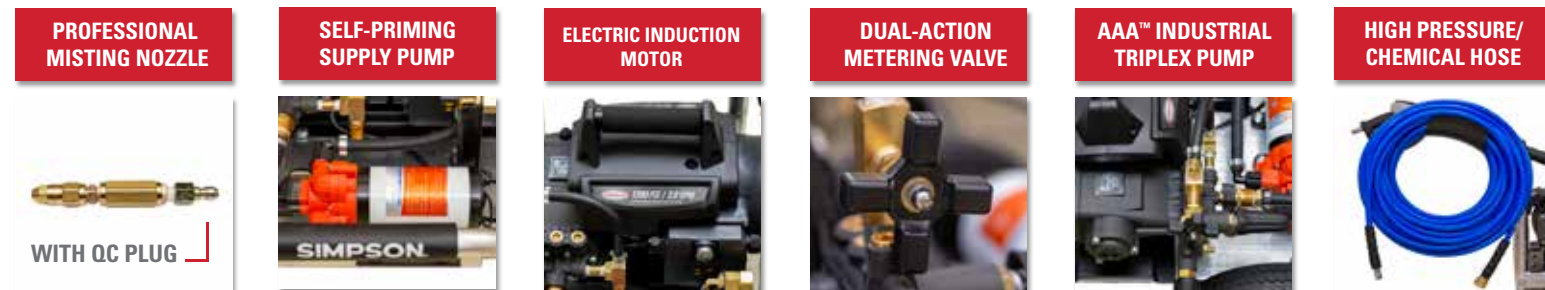

\*PRODUCT IMAGES MAY VARY SLIGHTLY FROM THE PRODUCT YOU RECEIVE. PLEASE CONTACT YOUR SALES REPRESENTATIVE FOR QUESTIONS ON YOUR PRODUCT.

- ✓ **PROFESSIONAL MISTING NOZZLE:** Designed to deliver a uniform mist resulting in an outstanding disinfecting application
- ✓ **SELF-PRIMING SUPPLY PUMP:** Allows the SM1200 to draw water or chemicals vertically up to 5 feet through its large 3/8" supply hose (Included)
- ✓ **ELECTRIC INDUCTION MOTOR:** 1.6 horsepower, 120-volt, 35 foot power cord with GFCI is designed to operate from any standard 15-amp outlet
- ✓ **DUAL-ACTION METERING VALVE:** Allows the user to quickly switch between misting and pressure washing modes
- ✓ **AAA™ INDUSTRIAL TRIPLEX PUMP:** Designed to deliver top performance
- ✓ **HIGH PRESSURE/CHEMICAL HOSE:** The 75 foot high pressure hose is designed to handle a wide variety of cleaning and sanitation chemicals for misting and high pressure washing

MODEL NUMBER	SM1200
PART NUMBER	61102
PRESSURE RATING	1200 PSI
FLOW RATING	2.0 GPM
ENGINE	120V MOTOR
PUMP	AAA™ Triplex + Self-Priming Supply Pump
HOSE	1/4" x 75' x QC, High Pressure/5' Supply Hose
TIRE/WHEEL	10" Never-Flat
LIMITED WARRANTY	5yr Frame, 5yr Pump, 4yr Self Priming Pump, 1yr Motor



### HEALTH CARE

- Hospitals
- Medical & Dental Offices
- Pharmacies
- Ambulances

### VETERINARY

- Animal Kennels
- Animal Transportation Vehicles & Units
- Examination & Surgery Rooms

### STADIUMS & ARENAS

- Sport Complexes
- Concert Halls
- Amphitheaters

### FOOD PROCESSING & HANDLING

- Restaurants
- Cafeterias & Kitchens
- Refrigerated Storage Units
- Food Processing Plants

### FARMING & AGRICULTURE

- Animal Pens
- Egg & Meat Processing Facilities
- Fleet Equipment

### MAINTENANCE & HOSPITALITY

- Hotels & Guest Services
- Fitness Center & Pools
- Guest Rooms
- Banquet Halls & Conference Rooms
- Lobbies & Bars

### EDUCATION

- Schools & Daycare Facilities
- Play Grounds & Equipment
- Cafeterias
- Desks & Chairs
- Bathrooms

### GROCERY & RETAIL

- Food Markets
- Department Stores
- Clothing & Specialty Shops
- Barber Shops & Salons

### FITNESS FACILITIES

- Gyms & Locker Rooms
- Weight Lifting Equipment
- Aerobic & Equipment
- Spas/Saunas & Tanning Rooms
- Showers
- Water Fountains

### PUBLIC TRANSPORTATION

- Buses & Trains
- Planes & Helicopters
- Boats & Ferries
- Ships & Cruise lines
- Rental Cars & Facilities

### MANUFACTURING FACILITIES

- Material Handling Plants
- Packaging Facilities
- Warehouse & Distribution Centers

Included with SM1200 (61102)	Additional Accessories	Optional Dual Misting Kit (# 88256)
75' High-Pressure Chemical Hose x1	75' High-Pressure Chemical Hose x1 (#30208)	Three-Way Hose Adapter x1
Pressure Washer Spray Gun x1	Dedicated Misting Spray Gun x1 (# 88257)	75' High-Pressure Chemical Hose x1
16" Steel Wand x1	31" Spray Wand (# 80479)	Dedicated Misting Spray Gun x1
4-Piece QC Nozzle x1	Misting Nozzle with QC (#88258)	
QC Misting Nozzle x1	Misting Nozzle with MNPT Connection (#88259)	
5' Supply Hose x1	Three-Way Hose Adapter (#88260)	
Dedicated spray gun and misting nozzle with QC hose connection x1		



INDUSTRIAL PRESSURE WASHERS

SUPER PRO ROLL CAGE SERIES

GAS POWERED



65200  
SMALL  
31" x 24.25" x 28.25"

HEAVY DUTY  
HOSE REELS  
AVAILABLE

SOLD SEPARATELY. SEE NEXT PAGE  
FOR DETAILS OR PAGE 37.



65208  
MEDIUM  
42" x 36.25" x 33.5"



65228  
LARGE  
47.5" x 29.5" x 38.5"  
Large external fuel tank  
for extended run time.

HIGH-PERFORMANCE  
INDUSTRIAL FEATURES



High & low pressure  
mountable hose reels  
available.  
(Sold separately)



Premium SIMPSON®,  
HONDA® or KOHLER®  
engines for powerful  
performance.



Strong steel lifting points  
for quick crane lifting and  
reinforced welded design  
with solid wheel axle for  
easy forklift transfer.  
On small and medium models ONLY.



Bolt-on external unloader  
with bypass hose provides  
durability for extended pump  
life.



Four wheel, heavy gauge  
1.5" steel frame design with  
a wheel locking brake system.



INDUSTRIAL PRESSURE WASHERS

SUPER PRO ROLL CAGE SERIES

GAS POWERED



LOW OIL  
SHUTDOWN

- Featured on all units (Excludes 65228). See page 42 for details.

MODEL NUMBER	PART NUMBER	PRESSURE RATING	FLOW RATING	DRIVE	ENGINE	PUMP	TIRE/WHEEL	HOSE	LIMITED WARRANTY
SMALL									
SW3625HADS	65200	3600 PSI	2.5 GPM	DIRECT	HONDA® GX200	AAA™ Industrial Triplex	10" Premium Pneumatic	5/16" x 25' x QC, Steel Braided	10yr Frame, 5yr Pump, 3yr Engine
SW3625SADS	65202	3600 PSI	2.5 GPM	DIRECT	SIMPSON® 208cc	AAA™ Industrial Triplex	10" Premium Pneumatic	5/16" x 25' x QC, Steel Braided	10yr Frame, 5yr Pump, 3yr Engine
MEDIUM									
SW4035HADM	65203	4000 PSI	3.5 GPM	DIRECT	HONDA® GX270	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided	10yr Frame, 5yr Pump, 3yr Engine
SW4440HCDM	65206	4400 PSI	4.0 GPM	DIRECT	HONDA® GX390	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided	10yr Frame, 5yr Pump, 3yr Engine
SW4440SCDM	65208	4400 PSI	4.0 GPM	DIRECT	SIMPSON® 420cc	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided	10yr Frame, 5yr Pump, 3yr Engine
SW4440HCBM	65209	4200 PSI	4.0 GPM	BELT	HONDA® GX390	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided	10yr Frame, 5yr Pump, 3yr Engine
SW4440SCBDM	65211	4400 PSI	4.0 GPM	BELT	SIMPSON® 420cc	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided	10yr Frame, 5yr Pump, 3yr Engine
LARGE									
SW3080HUGL	65217*	3000 PSI	8.0 GPM	GEAR	HONDA® GX690	UDOR Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided	10yr Frame, 7yr Pump, 3yr Engine
SW4060SUGL	65219*	4000 PSI	6.0 GPM	GEAR	SIMPSON® 680cc	UDOR Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided	10yr Frame, 7yr Pump, 3yr Engine
SW5050HCGL	65227*	5000 PSI	5.0 GPM	GEAR	HONDA® GX690	UDOR Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided	10yr Frame, 7yr Pump, 3yr Engine
SW7040KCGL	65228*	7000 PSI	4.0 GPM	GEAR	KOHLER® CH750	UDOR Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided	10yr Frame, 7yr Pump, 3yr Engine

\*Battery not included. Requires 12V Garden tractor battery type U1.

HOSE REELS

ALSO LISTED IN ACCESSORIES  
SECTION ON PAGE 41.



PART NUMBER	80399	80490	80403	80401
MAX PRESSURE	5000 PSI	5000 PSI	5000 PSI	5000 PSI
MAX TEMP	212° F	212° F	212° F	212° F
HOSE CAPACITY	100' x 3/8" or 125' x 1/4"	100' x 3/8" or 125' x 1/4"	200' x 3/8" or 250' x 1/4"	100' x 3/8" or 125' x 1/4"
MATERIAL	Heavy-duty Steel Construction	Heavy-duty Steel Construction	Heavy-duty Steel Construction	Heavy-duty Steel Construction

\*Does not have Hose Reel Guide

HOSE REEL INSTALLATION KITS

ALL INSTALLATION KITS COME COMPLETE WITH JUMPER HOSES & HARDWARE. INSTALLATION KITS  
MUST BE PURCHASED IN ORDER FOR HOSE REEL TO BE CONNECTED TO UNIT.

PART #	80381	80382	80383
DESCRIPTION	Roll Cage low pressure kit	Small Roll Cage high pressure kit	M/L Roll Cage high pressure kit



# HOT WATER PRESSURE WASHERS

Removing heavy grease, oil, salt, and algae can be a tough job but SIMPSON's hot water line is up to the task. With sizes ranging from the Mini Brute to the Super Brute, there is a SIMPSON hot-water machine ready to take on the toughest jobs no matter how big or small.

Check out more of our product reviews at [SIMPSONCLEANING.COM](http://SIMPSONCLEANING.COM)

## HOT WATER PRESSURE WASHERS BRUTE SERIES



MINI BRUTE<sup>1,3</sup>

KING BRUTE

BIG BRUTE<sup>2,3</sup>

BIG BRUTE<sup>2,3</sup>

MODEL NUMBER	MB1518
PART NUMBER	60363
PRESSURE RATING	1500 PSI
FLOW RATING	1.8 GPM
ENGINE/MOTOR	120 V Electric
PUMP	AAA® Triplex
ENGINE FUEL CAPACITY	N/A
BURNER FUEL CAPACITY	4.0 gal Diesel
DRIVE	Direct Drive
START	Electric
TIRE/ WHEEL	13" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 5yr Pump, 1yr Motor

MODEL NUMBER	KB3028
PART NUMBER	65100
PRESSURE RATING	3000 PSI
FLOW RATING	2.8 GPM
ENGINE/MOTOR	BRIGGS & STRATTON® OHV 1100
PUMP	CAT PUMPS® Industrial Triplex
ENGINE FUEL CAPACITY	.75 gal Gasoline
BURNER FUEL CAPACITY	5.0 gal Diesel
DRIVE	Direct Drive
START	Recoil
TIRE/ WHEEL	13" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 5yr Pump, 2yr Engine

MODEL NUMBER	BB65106 <small>LOW OIL SHUTDOWN</small>
PART NUMBER	65106
PRESSURE RATING	4000 PSI
FLOW RATING	4.0 GPM
ENGINE/MOTOR	HONDA® GX390
PUMP	COMET Industrial Triplex
ENGINE FUEL CAPACITY	6.0 gal Gasoline
BURNER FUEL CAPACITY	11 gal Diesel
DRIVE	Direct Drive
START	Recoil/ E-Start
TIRE/ WHEEL	10" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 5yr Pump, 3yr Engine

MODEL NUMBER	BB65105 <small>LOW OIL SHUTDOWN</small>
PART NUMBER	65105
PRESSURE RATING	4000 PSI
FLOW RATING	4.0 GPM
ENGINE/MOTOR	VANGUARD® V-Twin
PUMP	COMET Industrial Triplex
ENGINE FUEL CAPACITY	6.0 gal Gasoline
BURNER FUEL CAPACITY	11 gal Diesel
DRIVE	Direct Drive
START	E-Start
TIRE/ WHEEL	10" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 5yr Pump, 3yr Engine



BIG BRUTE<sup>2,3</sup>



SUPER BRUTE<sup>2,3</sup>

65110

SUPER BRUTE<sup>2,3</sup>

MODEL NUMBER	BB65108 <small>LOW OIL SHUTDOWN</small>
PART NUMBER	65108
PRESSURE RATING	4000 PSI
FLOW RATING	4.0 GPM
ENGINE/MOTOR	VANGUARD® V-Twin
PUMP	UDOR Industrial Triplex
ENGINE FUEL CAPACITY	6.0 gal Gasoline
BURNER FUEL CAPACITY	11 gal Diesel
DRIVE	Gear Drive
START	E-Start
TIRE/ WHEEL	10" Premium Pneumatic
LIMITED WARRANTY	10yr Frame, 7yr Pump, 3yr Engine

MODEL NUMBER	SB3555 <small>LOW OIL SHUTDOWN</small>
PART NUMBER	65110
PRESSURE RATING	3500 PSI
FLOW RATING	5.5 GPM
ENGINE/MOTOR	VANGUARD®570cc
PUMP	COMET Premium Series Industrial Triplex
ENGINE FUEL CAPACITY	10 gal Gasoline
BURNER FUEL CAPACITY	10 gal Diesel
DRIVE	Belt Drive
START	E-Start
TIRE/ WHEEL	Forklift Feet / Permanent Mount
LIMITED WARRANTY	10yr Frame, 7yr Pump, 3yr Engine

MODEL NUMBER	SB4066 <small>LOW OIL SHUTDOWN</small>
PART NUMBER	65115
PRESSURE RATING	4000 PSI
FLOW RATING	6.6 GPM
ENGINE/MOTOR	SIMPSON® 679cc
PUMP	UDOR Industrial Triplex
ENGINE FUEL CAPACITY	10 gal Gasoline
BURNER FUEL CAPACITY	10 gal Diesel
DRIVE	Gear Box
START	E-Start
TIRE/ WHEEL	Forklift Feet / Permanent Mount
LIMITED WARRANTY	10yr Frame, 7yr Pump, 3yr Engine



65110

SUPER BRUTE<sup>2,3</sup>

MODEL NUMBER	SB65123 <small>LOW OIL SHUTDOWN</small>
PART NUMBER	65123
PRESSURE RATING	3500 PSI
FLOW RATING	5.5 GPM
ENGINE/MOTOR	HONDA® GX630
PUMP	General Pump®
ENGINE FUEL CAPACITY	10 gal Gasoline
BURNER FUEL CAPACITY	10 gal Diesel
DRIVE	Belt Drive
START	E-Start
TIRE/ WHEEL	Forklift Feet / Permanent Mount
LIMITED WARRANTY	10yr Frame, 5yr Pump, 3yr Engine

<sup>1</sup>MINI BRUTE includes a 15 amp high limit switch and 35' GFCI cord; not pictured.  
<sup>2</sup>Battery not included on E-Start units. Requires 12V Garden tractor battery Type U1.  
<sup>3</sup>All Brute series models come standard with gun, lance, hose and nozzles.

Contact a Sales Representative for more details. See page 45 for information.  
LOW OIL SHUTDOWN Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.





# TRAILER MOUNTED PRESSURE WASHERS



SIMPSON's mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailers, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.



## MOBILE TRAILER PRESSURE WASHERS



GAS POWERED



✓ CUSTOM SUPERIOR CRAFTSMANSHIP

✓ THICK WALL RECTANGULAR STEEL TUBING



95001



95003



95006

	STAGE 1A COLD WATER				STAGE 1B COLD WATER				STAGE 1C HOT WATER					
MODEL NUMBER	95000	LOW OIL SHUTDOWN	95001	LOW OIL SHUTDOWN	95002	LOW OIL SHUTDOWN	95003*	LOW OIL SHUTDOWN	95004*	LOW OIL SHUTDOWN	95005*	LOW OIL SHUTDOWN	95006*	LOW OIL SHUTDOWN
PRESSURE RATING	3200 PSI		3800 PSI		4200 PSI		4200 PSI		4200 PSI		4000 PSI		4000 PSI	
FLOW RATING	2.8 GPM		3.5 GPM		4.0 GPM		4.0 GPM		4.0 GPM		4.0 GPM		4.0 GPM	
ENGINE	HONDA® GX200		HONDA® GX270		HONDA® GX390		HONDA® GX390 w/ Recoil & E-Start		VANGUARD V-TWIN w/ E-Start		HONDA® GX390 w/ Recoil & E-Start		VANGUARD V-TWIN w/ E-Start	
PUMP	CAT PUMPS® Triplex		CAT PUMPS® Triplex		CAT PUMPS® Triplex		CAT PUMPS® Triplex		CAT PUMPS® Triplex		COMET Triplex		COMET Triplex	
TRAILER SIZE	7' Overall (4' x 4' Platform)		9' Overall (4' x 5.5' Platform)		9' Overall (4' x 5.5' Platform)		9' Overall (4' x 5.5' Platform)		9' Overall (4' x 5.5' Platform)		9' Overall (4' x 5.5' Platform)		9' Overall (4' x 5.5' Platform)	
TRAILER FRAME	Rectangular thick wall steel tubing		Rectangular thick wall steel tubing		Rectangular thick wall steel tubing		Rectangular thick wall steel tubing		Rectangular thick wall steel tubing		Rectangular thick wall steel tubing		Rectangular thick wall steel tubing	
AXLE RATING	2000 lbs		2000 lbs		2000 lbs		2000 lbs		2000 lbs		3500 lbs		3500 lbs	
TIRE	12" 6-Ply		12" 6-Ply		12" 6-Ply		12" 6-Ply		12" 6-Ply		13" 6-Ply		13" 6-Ply	
LIGHTING	LED		LED		LED		LED		LED		LED		LED	
TRAILER HITCH BALL SIZE	2" Ball		2" Ball		2" Ball		2" Ball		2" Ball		2" Ball		2" Ball	
WATER TANK SIZE	100 Gal		150 Gal		150 Gal		150 Gal		150 Gal		200 Gal		200 Gal	
HIGH PRESSURE HOSE	3/8" x 50' Steel-braided Monster w/ QC		3/8" x 100' Steel-braided Monster w/ QC		3/8" x 100' Steel-braided Monster w/ QC		3/8" x 100' Steel-braided Monster w/ QC		3/8" x 100' Steel-braided Monster w/ QC		3/8" x 100' Armor Hose™ w/ QC		3/8" x 100' Armor Hose™ w/ QC	
HIGH PRESSURE HOSE REEL	100'		100'		100'		100'		100'		100'		100'	
SUPPLY HOSE	N/A		N/A		N/A		N/A		N/A		3/4" x 75'		3/4" x 75'	
SUPPLY HOSE REEL	N/A		N/A		N/A		N/A		N/A		Standard		Standard	
LIMITED WARRANTY	1yr Frame, 5yr Pump, 3yr Engine		1yr Frame, 5yr Pump, 3yr Engine		1yr Frame, 5yr Pump, 3yr Engine		1yr Frame, 5yr Pump, 3yr Engine		1yr Frame, 5yr Pump, 3yr Engine		1yr Frame, 5yr Pump, 3yr Engine		1yr Frame, 5yr Pump, 3yr Engine	

95004 Comes with external fuel tank.

\*Battery not included. Requires 12V Garden tractor battery type U1.

LOW OIL SHUTDOWN Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.





# PREMIUM PORTABLE & INVERTER GENERATORS



Powershot™ portable and inverter generators by Simpson® are engineered to provide power in even the toughest weather conditions. Reliable and easy to use, Powershot™ portable and inverter generators are ideal for back-up power, tailgate parties, construction sites and or any other outdoor event where and when power is needed most.



PREMIUM GENERATORS  
COMMERCIAL SERIES



MODEL NUMBER	SPG3640	SPG3645	SPG5568
PART NUMBER	70062	70005	70006
STARTING WATTS	4000	4500	6875
RUNNING WATTS*	3600	3600	5500
AC VOLTAGE	120V	120V	120/240V
AC FREQUENCY	60 Hz	60 Hz	60 Hz
ENGINE	SIMPSON® OHV	SIMPSON® OHV	SIMPSON® OHV
DISPLACEMENT	224cc	224cc	420cc
VOLTAGE REGULATION	Automatic	Automatic	Automatic
START	Recoil	Recoil	Recoil
FUEL CAPACITY	3.4 gal Gasoline	3.4 gal Gasoline	6.1 gal Gasoline
TIRE/WHEEL	N/A	8" Never-flat	9" Never-flat
DIMENSIONS	27" x 23.1" x 20"	28.7"x 21.6" x 22.8"	31.1"x 21.6" x 23.8"
WEIGHT	101.4 lb	117.94 lb	194 lb
RUN TIME- 50% LOAD	8 Hours	8 Hours	9 Hours
dBA- 25% LOAD @ 7M+	71	72	79
LIMITED WARRANTY**	3yr Residential, 6m Commercial	3yr Residential, 6m Commercial	3yr Residential, 6m Commercial

+Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

GENERATOR PANEL CONFIGURATIONS\*:

SPG3640



SPG3645



SPG5568



SPG7085E



SPG7593E



SPG8310E



PREMIUM GENERATORS  
COMMERCIAL SERIES



MODEL NUMBER	SPG7085E	SPG7593E	SPG8310E
PART NUMBER	70010	70007	70008
STARTING WATTS	8500	9375	10000
RUNNING WATTS*	7000	7500	8300
AC VOLTAGE	120/240V	120/240V	120/240V
AC FREQUENCY	60Hz	60 Hz	60 Hz
ENGINE	HONDA® GX390	SIMPSON® OHV	SIMPSON® OHV
DISPLACEMENT	389cc	420cc	439cc
VOLTAGE REGULATION	Automatic	Automatic	Automatic
START	Recoil/E-Start	Recoil/E-Start	Recoil/E-Start
FUEL CAPACITY	6.1 gal Gasoline	6.1 gal Gasoline	6.1 gal Gasoline
TIRE/WHEEL	9" Never-flat	9" Never-flat	9" Never-flat
DIMENSIONS	31.1" x 21.6" x 23.8"	31.1" x 21.6" x 23.8"	31.1" x 21.6" x 23.8"
WEIGHT	191.8 lb	209.4 lb	220 lb
RUN TIME- 50% LOAD	8 Hours	8 Hours	8 Hours
dBA- 25% LOAD @ 7M+	74	76	78
LIMITED WARRANTY**	3yr Residential, 6m Commercial Battery not included. Uses 12V-14AH battery.	3yr Residential, 6m Commercial Battery not included. Uses 12V-14AH battery.	3yr Residential, 6m Commercial Battery not included. Uses 12V-14AH battery.

+Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

DISCOVER YOUR POWER NEEDS.  
SIZING YOUR GENERATOR

- 1 Select the devices you wish to run at the same time
- 2 List any starting watts required by your devices
- 3 Add up the running watts of all of your devices
- 4 Add the HIGHEST starting watt listed to the total running watts required by your devices

DEVICE	STARTING WATTS	RUNNING WATTS	RECOMMENDED SIZE
LIGHT BULB	N/A	100	MINIMUM AMOUNT OF STARTING WATTS NEEDED ON YOUR GENERATOR
REFRIGERATOR/FREEZER	2200	700	
CELL PHONE CHARGER	N/A	25	
TOTAL	2200	825	
			3025

High altitude carburator kits and USDA Forestry approved spark areorters available, but not included.

\*Generator per PGMA (Portable Generator Manufactures’ Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

\*\*See Operator’s Manual for complete warranty details.

LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.



PREMIUM GENERATORS

INDUSTRIAL SERIES

**LIFTING HOOK**  
Equipped with a strong steel lifting hook for quick crane lifting and easy job site transfer

**EASY ACCESS CONTROL PANEL**  
Equipped with run time indicator

**WELDED WHEEL BARROW LIFTING HANDLE**  
For stable maneuvering and easy mobility across a variety of terrains

**PREMIUM HONDA® ENGINES**  
Equipped with low oil shutdown to protect engine and extend product life

**V-MOUNT VIBRATION ISOLATION SYSTEM**  
Extends generator life

**UL LISTED RECEPTACLES**  
GFCI outlets standard on all models for use in OSHA safe work environments

**WATERPROOF OUTLET COVERS**  
Provides safety and durable protection for all receptacles

**HIGH-QUALITY 100% COPPER-WOUND BRUSHLESS ALTERNATOR**  
Provides reliable, low THD power that is safe for use on sensitive devices

**PREMIUM NEVER-FLAT WHEELS**  
Provide easy maneuverability across various types of terrain

**AUTO IDLE DOWN**  
Reduces noise and saves fuel

**HEAVY-DUTY WELDED STEEL FRAME WITH POWDER COATED FINISH**  
Provides durability and corrosion resistance



MODEL NUMBER	SCGH5500	SCGH8500	SCGH8500E
PART NUMBER	70053	70054	70055
STARTING WATTS	5500	8500	8500
RUNNING WATTS*	4500	7000	7000
AC VOLTAGE	120V/240V	120V/240V	120V/240V
AC FREQUENCY	60 Hz	60 Hz	60 Hz
ENGINE	HONDA® GX270	HONDA® GX390	HONDA® GX390
DISPLACEMENT	270cc	389cc	389cc
VOLTAGE REGULATION	Automatic	Automatic	Automatic
START	Recoil	Recoil	Recoil/ E-Start*
FUEL CAPACITY	7.9 gal	7.9 gal	7.9 gal
TIRE/WHEEL	9" Never-flat	9" Never-flat	9" Never-flat
RUN TIME- 50% LOAD	17	12	12
dBA- 25% LOAD @ 7M+	72	74	74
LIMITED WARRANTY**	3yr Commercial	3yr Commercial	3yr Commercial

Please contact a Sales Representative for more details  
See page 45 for information.

+Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

SCGH5500

(NEMA L5-20R)  
2x 120V GFCI

(NEMA L14-30R)  
1x 120V

SCGH8500

(NEMA L5-20R)  
2x 120V GFCI

(NEMA L5-30R)  
1x 120V

(NEMA L14-30R)  
1x 120/240V

SCGH8500E

(NEMA L5-20R)  
2x 120V GFCI

(NEMA L5-30R)  
1x 120V

(NEMA L14-30R)  
1x 120/240V

LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.

DEVICE WATTAGES

HEATING & COOLING

DEVICE	STARTING WATTS	RUNNING WATTS
10,000 BTU CENTRAL AC¹	3000	1500
24,000 BTU CENTRAL AC¹	4950	3800
1/2 HP FURNACE FAN BLOWER¹	2300	875
1/3 HP FURNACE FAN BLOWER¹	1400	700
HEAT PUMP	4500	4700
13 GAL HUMIDIFIER	-	175
SPACE HEATER	-	1800
10,000 BTU WINDOW AC	1800	1200
12,000 BTU WINDOW AC	3950	3250

RESIDENTIAL

DEVICE	STARTING WATTS	RUNNING WATTS
COFFEE MAKER	-	1750
ELECTRIC DRYER	1800	5750
ELECTRIC RANGE	-	1500/ELEMENT
ELECTRIC WATER HEATER	1000	2000
1/2 HP GARAGE DOOR OPENER	2350	500-875
1250 WATT HAIR DRYER	-	1250
100 WATT LIGHT BULB	-	100
1000 WATT MICROWAVE	-	1000
REFRIGERATOR/ FREEZER	2200	700
SECURITY SYSTEM	-	500
1/2 HP SUMP PUMP	2150	800-1050
1/3 HP SUMP PUMP	1300	800
TELEVISION	-	200-500
TOASTER	-	1200-1650
WASHING MACHINE	2300	1150
1/2 HP WELL PUMP	2100	1000
1/3 HP WELL PUMP	1400	750

¹Wattages listed are approximated, always check appliances for actual figures.

High altitude carbtorator kits and USDA Forestry approved spark arreoters available, but not included.

\*Generator per PGMA (Portable Generator Manufactures’ Association) standard  
ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

\*\*See Operator’s Manual for complete warranty details.

RECREATIONAL

DEVICE	STARTING WATTS	RUNNING WATTS
AM/ FM RADIO	-	100
BLENDER	450	400
20" BOX FAN	-	200
CD/ DVD PLAYER	-	100
CELLPHONE BATTERY CHARGER	-	25
COLOR TV	-	200-500
ELECTRIC GRILL	-	1650
INFLATER PUMP	150	50
OUTDOOR LIGHT STRING	-	250
13,500 BTU RV AC	700	1500
SLOW COOKER	-	250

LANDSCAPING

DEVICE	STARTING WATTS	RUNNING WATTS
ELECTRIC HEDGE TRIMMER	-	400
ELECTRIC LAWN MOWER	-	1200
9" ELECTRIC LINE TRIMMER	-	350-500
1/2 HP 12" ELEC. CHAIN SAW	-	900-1220

WORK SITE

DEVICE	STARTING WATTS	RUNNING WATTS
1HP AIR COMPRESSOR	4500	2000
1/2 HP AIR COMPRESSOR	2000	1400
1/3 HP AIRLESS PAINT SPRAYER	1200	600
3" BELT SANDER	2400	1200
8" BENCH GRINDER	1100	1400
6 1/2" CIRCULAR SAW	2300	800-1000
1/2" HAND DRILL	900	600
3/8" HAND DRILL	600	400
10" MITER SAW/TABLE SAW	2100	840
QUARTZ HALOGEN WORK LAMP	-	1000
RECIPROCATING SAW	-	960



# AMP UP WITH PORTABLE POWER

# INVERTER GENERATOR AND PARALLEL BOX ACCESSORY



**NOW WITH GFCI PROTECTION!**  
70061

**RV PLUG ADAPTER INCLUDED!**  
70059

**RV PLUG ADAPTER INCLUDED!**  
70063

MODEL NUMBER	<b>SIG2218</b>	<b>SIG3632</b>	<b>SIG4540</b>
PART NUMBER	<b>70061</b>	<b>70059</b>	<b>70063</b>
STARTING WATTS	2200	3600	4500
RUNNING WATTS*	1800	3200	4000
AC VOLTAGE	120V	120V	120V
AC FREQUENCY	60 Hz	60 Hz	60 Hz
ENGINE	SIMPSON®	SIMPSON®	SIMPSON®
START	Recoil	Recoil / Electric	Recoil / Electric
FUEL CAPACITY	1.2 gal Gasoline	1.5 gal Gasoline	2.4 gal Gasoline
RUN TIME- 25% LOAD	10 Hour	9 Hour	9 Hour
dBA- 25% LOAD @ 7M+	53	67	69
OUTLET TYPE	120V Duplex (5-20R) GFCI 12V DC Automotive	120V (5-30R) 120V Duplex (5-20R) GFCI 12V DC Automotive	120V (TT-30R) RV Outlet 120V Duplex (5-20R) GFCI 12V DC Automotive
LIMITED WARRANTY**	3yr Consumer, 1yr Commercial	3yr Consumer, 1yr Commercial Battery Included	3yr Consumer, 1yr Commercial Battery Included

+Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

## PARALLEL BOX ACCESSORY

MODEL NUMBER	<b>SIG22PK</b>
PART NUMBER	<b>80442</b>
AMPS	30
LIMITED WARRANTY	90 Days

The SIG22PK parallel box includes two sets of power leads and grounding wires for easy connection between two inverter generators rated up to 3300 running watts.

**Inverter generators and parallel box sold separately.**

**High altitude carburetor kits available but not included.**

\*Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators.

\*\*See Operator's Manual for complete warranty details.





# PREMIUM PORTABLE TRASH PUMPS

Engineered to handle water containing mud, sand, leaves, twigs, and other contaminants, SIMPSON's trash water pumps are perfect for clearing floodwater and wastewater from residential, municipal, and industrial sites. Easy to transport, use, and clean, SIMPSON's trash water pumps will get the job done no matter where you need them.

Check out more of our product reviews at [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com)

## PREMIUM PORTABLE TRASH PUMPS

### POWERSHOT™ SERIES

GAS POWERED



MODEL NUMBER	<b>S8TP02</b> <small>LOW OIL SHUTDOWN</small>
PART NUMBER	<b>71002</b>
ENGINE	KOHLER® SH270
START	Recoil
FLOW RATE	158 GPM
INLET/OUTLET DIAMETER	2"
FUEL TANK CAPACITY	2.5 gal
SUCTION HEAD LIFT	25'
TOTAL HEAD LIFT	95'
LIMITED WARRANTY	3yr

<b>S8TP03</b> <small>LOW OIL SHUTDOWN</small>
<b>71003</b>
HONDA® GX200
Recoil
285 GPM
3"
2.5 gal
25'
95'
3yr

#### FEATURES

**PUMP HOUSING MATERIAL = DIE CAST ALUMINUM**

**MECHANICAL SEAL MATERIAL = SILICON CARBIDE**

**IMPELLER MATERIAL = CAST IRON**

#### INCLUDES

**HOSE CLAMPS (X3)**

**HOSE BARBS (X2)**

**HOSE NUTS (X2)**

**GASKETS (X2)**

**STRAINER ATTACHMENT (X1)**

**STRAINER (X1)**


**TOOL KIT**



LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 42 for details.





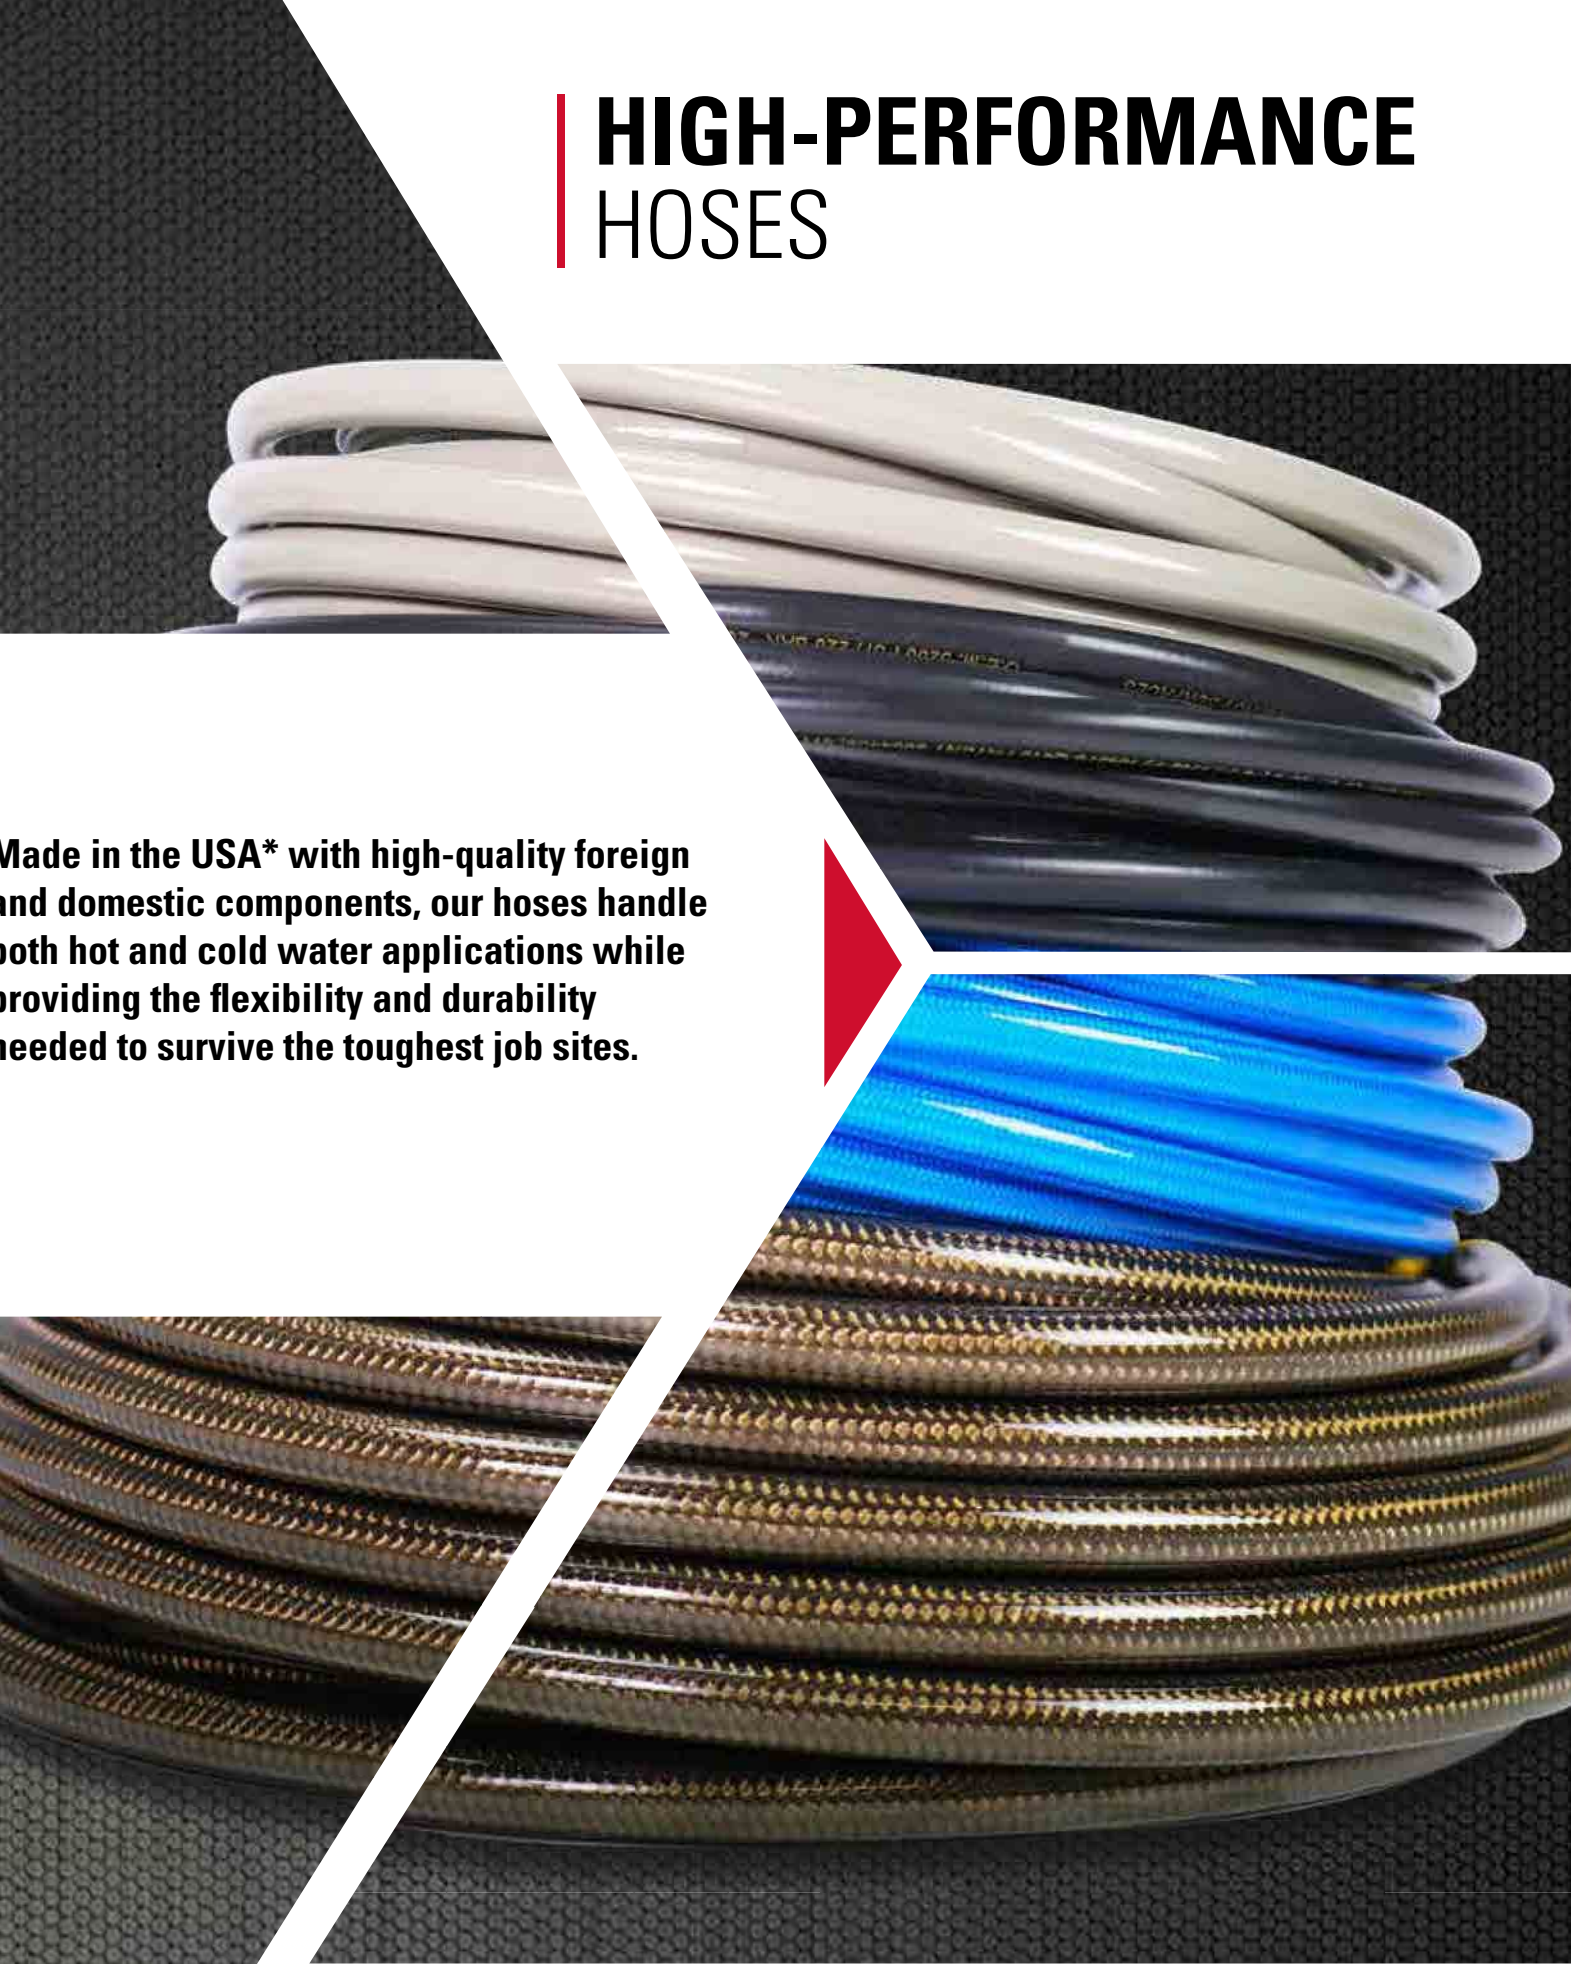

Made in the USA\* with high-quality foreign and domestic components, our hoses handle both hot and cold water applications while providing the flexibility and durability needed to survive the toughest job sites.



\*Excluding the Wrapped Rubber Hose Series.

## HIGH PERFORMANCE HOSES



LIMITED  
WARRANTY



### MORFLEX® HOSE SERIES



SIMPSON's MorFlex technology is used for high flexibility and kink resistance. It has a lightweight polyester braid for easy handling and a polyurethane outer jacket that is non-marring and abrasion-resistant. MorFlex hoses are equipped with threaded M22 connections with a dual o-ring design to fit most gas and electric pressure washers with standard M22 connections. M22 x M22 adapter included.



PART NUMBER	40224 (41107)	40225 (41108)	40226 (41109)
MAX PRESSURE	3300 PSI	3700 PSI	3700 PSI
ID x LENGTH	1/4" x 25'	5/16" x 25'	5/16" x 50'
MAX TEMP	140° F	140° F	140° F
INNER MATERIAL	Polyester	Polyester	Polyester
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
FITTINGS	M22 FNPT x M22 FNPT	M22 FNPT x M22 FNPT	M22 FNPT x M22 FNPT

### SANTOPRENE™ HOSE



SIMPSON's Santoprene cold water hose delivers extended hose life. This polyester and steel-braided, abrasion resistant hose is designed to fit most gas and electric pressure washers with standard M22 connections. M22 x M22 adapter included.



PART NUMBER	41182
MAX PRESSURE	4000 PSI
ID x LENGTH	1/4" x 25'
MAX TEMP	140° F
INNER MATERIAL	Polyester & Steel-braided
OUTER MATERIAL	Santoprene w/ 4" Bend Protectors
FITTINGS	M22 FNPT x M22 FNPT

**M22 ADAPTER INCLUDED**  
WITH MORFLEX® & SANTOPRENE™ HOSES  
USED TO CONNECT MULTIPLE HOSES WITH STANDARD M22 CONNECTIONS



### STEEL-BRAIDED MONSTER HOSE SERIES



SIMPSON's Monster hose series is designed using dual-braided construction of steel over polyester for high durability. The translucent polyurethane outer jacket is non-marring, abrasion resistant, and designed to fit most gas pressure washers with standard quick connect fittings. Its one wipe clean, anti-microbial feature makes it ideal to be used in most any environment.



PART NUMBER	41113	41028 (41071)	41030
MAX PRESSURE	4500 PSI	4500 PSI	4500 PSI
ID x LENGTH	3/8" x 25'	3/8" x 50'	3/8" x 100'
MAX TEMP	140° F	140° F	140° F
INNER MATERIAL	Polyester & Steel-braided	Polyester & Steel-braided	Polyester & Steel-braided
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
FITTINGS	QC Socket & Plug	QC Socket & Plug	QC Socket & Plug

PART NUMBER	41032	41034
MAX PRESSURE	4500 PSI	4500 PSI
ID x LENGTH	3/8" x 150'	3/8" x 200'
MAX TEMP	140° F	140° F
INNER MATERIAL	Polyester & Steel-braided	Polyester & Steel-braided
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
FITTINGS	QC Socket & Plug	QC Socket & Plug

(Comes in retail packaging)



# HIGH PERFORMANCE HOSES



LIMITED  
WARRANTY



## ARMOR HOSE™ SERIES



The Armor hot water hose is built for high temperature applications up to 250°F and is designed with dual-braided construction of steel over polyester. The translucent polyurethane outer jacket is non-marring, abrasion resistant, and designed to fit most gas pressure washers with standard quick connect fittings. Its one wipe clean, anti-microbial feature makes it ideal to be used in most any environment.



PART NUMBER	41114 (41095)	41096	41115
MAX PRESSURE	4500 PSI	4500 PSI	4500 PSI
ID x LENGTH	3/8" x 50'	3/8" x 100'	3/8" x 200'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester & Steel-braided	Polyester & Steel-braided	Polyester & Steel-braided
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
FITTINGS	QC Socket & Plug	QC Socket & Plug	QC Socket & Plug

## WRAPPED RUBBER HOSE SERIES

SIMPSON's wrapped rubber hose series features dual-braided construction of steel over polyester and is jacketed with wrapped rubber for high strength, durability and kink resistance. These hoses provide exceptional performance in high temperature applications up to 250°F and pressure ratings from 4,500 to 10,000 PSI.



PART NUMBER	41183	41184	41185
MAX PRESSURE	4500 PSI	8000 PSI	8000 PSI
ID x LENGTH	3/8" x 50'	3/8" x 50'	3/8" x 100'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	R1 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL	Wrapped Rubber w/ 6" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
FITTINGS	Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug

PART NUMBER	41186	41187	41188	41189
MAX PRESSURE	8000 PSI	10,000 PSI	10,000 PSI	10,000 PSI
ID x LENGTH	3/8" x 200'	3/8" x 50'	3/8" x 100'	3/8" x 200'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	R2 Steel-braided	R2 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
FITTINGS	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug

PART NUMBER	41190	41191	41192
MAX PRESSURE	10,000 PSI	10,000 PSI	10,000 PSI
ID x LENGTH	1/2" x 50'	1/2" x 100'	1/2" x 200'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	R2 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
FITTINGS	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug

# HIGH PERFORMANCE HOSES



LIMITED  
WARRANTY



## JETXTREME™ JETTER HOSE SERIES



SIMPSON's Jetxtreme hose series is packed with performance for the toughest of jobs. This hose is constructed with a polyester braided inner tube and a polyurethane, anti-microbial outer jacket that provides added strength and durability. It's one wipe clean feature allows for quick clean up and storage from your jobsite. Designed to handle your hot water jetting needs up to 250°F, the Jetxtreme hose series offers a wide range of PSI performances.



PART NUMBER	30120	30121	30122
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI
ID x LENGTH	3/8" x 50'	3/8" x 75'	3/8" x 100'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane
FITTINGS	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30123	30124	30125	30170
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI	3000 PSI
ID x LENGTH	3/8" x 150'	3/8" x 200'	3/8" x 300'	1/4" x 25'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
FITTINGS	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30171	30172	30173	30174
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4" x 50'	1/4" x 100'	1/4" x 150'	1/4" x 200'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
FITTINGS	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30175	30176	30200	30201
MAX PRESSURE	3000 PSI	3000 PSI	4000 PSI	4000 PSI
ID x LENGTH	1/4" x 250'	1/4" x 300'	1/2" x 50'	1/2" x 75'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
FITTINGS	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30202	30203	30204	30205
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI	4000 PSI
ID x LENGTH	1/2" x 100'	1/2" x 150'	1/2" x 200'	1/2" x 5'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
FITTINGS	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30206
MAX PRESSURE	4000 PSI
ID x LENGTH	1/2" x 400'
MAX TEMP	250° F
INNER MATERIAL	Polyester braided
OUTER MATERIAL	Polyurethane
FITTINGS	Solid MNPT x Solid MNPT



HIGH PERFORMANCE HOSES



CARPET HOSE SERIES



LIMITED  
WARRANTY



SIMPSON’s carpet cleaning solution hoses are ideal for many commercial cleaning applications. These solution hoses are built with a non-marring bonded jacket and a seamless heat resistant inner tube. Also included are 4-inch bend protectors to prevent harmful twists and breaks during cleaning. This heavy duty hose is flexible, lightweight, and is rated up to 3000 PSI.



PART NUMBER	30210	30211	30213
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	3/8” x 25’	3/8” x 50’	3/8” x 100’
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane
FITTINGS	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

PART NUMBER	30214	30215	30116	30117
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	3/8” x 150’	3/8” x 200’	1/4” x 250’	1/4” x 300’
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
FITTINGS	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

PART NUMBER	30218	30219	30140	30141
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	3/8” x 40’	3/8” x 24”	1/4” x 25’	1/4” x 50’
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
FITTINGS	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

PART NUMBER	30142	30143	30144	30145
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4” x 100’	1/4” x 150’	1/4” x 200’	1/4” x 250’
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
FITTINGS	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

PART NUMBER	30146	30155	30156	30157
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4” x 300’	1/4” x 12”	1/4” x 15”	1/4” x 18”
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
FITTINGS	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

PART NUMBER	30258	30259	30260	30161
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	3/8” x 12”	3/8” x 15”	3/8” x 18”	1/4” x 13”
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
FITTINGS	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

PART NUMBER	30177	30178	30179	30207
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4” x 12”	1/4” x 15”	1/4” x 18”	1/4” x 75’
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
FITTINGS	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

VITAL OXIDE

PROFESSIONAL GRADE CLEANING

Vital Oxide is an EPA registered hospital disinfectant cleaner, mold killer and super effective odor eliminator. Ready to use with no mixing required, just spray, wipe or fog right from the bottle. Non-irritating to the skin and non-corrosive to treated articles.

VITAL OXIDE IN ACTION:

- *Used in emergency response to eliminate Norovirus out-breaks.*
- *Clinical trials have shown a decrease of 95% in Health-care Associated Infections (HAI’S) of Acinetobacter spp in hospital environment.*
- *Used in disaster response to eliminate mold and mildew from flood damage.*
- *University and government sponsored studies document long-term effectiveness on mold and mold spores, even eliminating mold spores.*

MODEL NUMBER	CONTENTS AMOUNT
82245	5 GALLON PAIL
82246*	15 GALLON DRUM
82247*	55 GALLON DRUM
82248*	261 GALLON TOTE

\*Shipping times vary due to availability. Contact your sales rep for more information



CLEANING DETERGENT

PROFESSIONAL GRADE CLEANING

SIMPSON® pressure washer cleaners are specifically formulated to enhance your pressure washer’s performance. Featuring different formulas, multi- purpose, heavy-duty, and biodegradable, SIMPSON® cleaners will help cut through tough grease, power away stains, and easily remove mold and mildew on the jobsite and at home.

FOR USE ON MULTIPLE SURFACES:

- *DECK, FENCE & PATIO*
- *BRICK, SIDING & CONCRETE*
- *CARS, TRUCKS, BIKES & RVs*
- *OUTDOOR FURNITURE*



MULTI-PURPOSE



HEAVY-DUTY




NATURAL GREEN FORMULA

PART NUMBER	88289 (88281)	88290 (88282)	88291 (88283)
CONTENT AMOUNT	1 Gallon	1 Gallon	1 Gallon



# PREMIUM ACCESSORIES

SIMPSON® offers a wide variety of premium pressure washer accessories to enhance your cleaning experience. Many accessories are designed to fit most pressure washers, providing more cleaning options for the homeowner and professional to keep you cleaning effectively and efficiently.

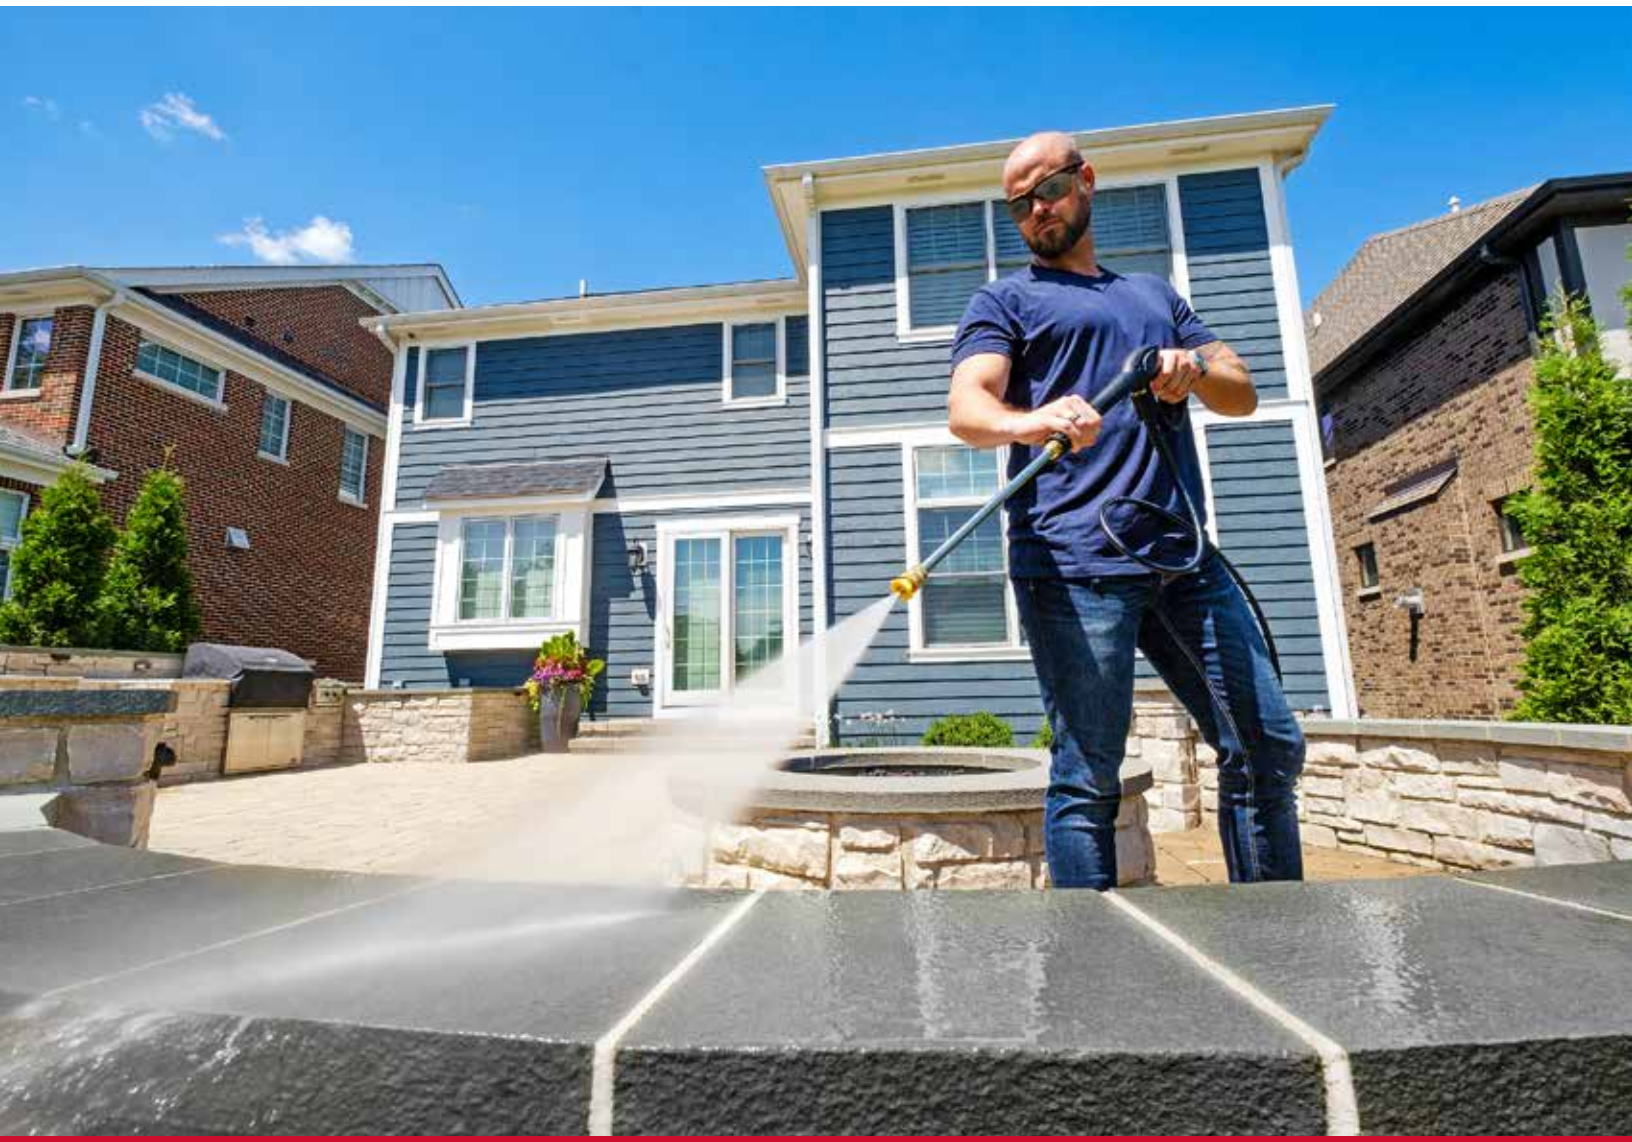


## PREMIUM ACCESSORIES

### GUNS & LANCES

**FRONT LOAD SPRAY GUN**

PART NUMBER	80147
MAX PRESSURE	3400 PSI
MAX GPM	8.0 GPM
MAX TEMP	140° F
INLET - HOSE CONNECT	M22 Male
OUTLET - LANCE CONNECT	M22 Female




**360° SWIVEL SIDE ASSIST SPRAY GUN**

PART NUMBER	80148
MAX PRESSURE	4500 PSI
MAX GPM	6.6 GPM
MAX TEMP	140° F
INLET - HOSE CONNECT	M22 Male w/ 3/8" Female QC plug adapter
OUTLET - LANCE CONNECT	M22 Female



**HOT WATER SPRAY GUN**


PART NUMBER	80178
MAX PRESSURE	5075 PSI
MAX GPM	12.0 GPM
MAX TEMP	212° F
INLET - HOSE CONNECT	3/8" FNPT with adapters*
OUTLET - LANCE CONNECT	1/4" FNPT



\*INCLUDES BONUS ADAPTERS  
QTY 1: 3/8" MNPT x M22 Male  
QTY 1: 3/8" MNPT x QC Plug


**DIAL-N-WASH®**  
ADJUSTABLE PRESSURE REGULATOR

PART NUMBER	82232
MAX PRESSURE	4500 PSI
MAX GPM	4.0 GPM
MAX TEMP	140° F
INLET - LANCE CONNECT	M22 Female
OUTLET - GUN CONNECT	M22 Male




**16" SPRAY LANCE**

PART NUMBER	80149
MAX PRESSURE	3600 PSI
MAX GPM	N/A
MAX TEMP	140° F
INLET - GUN CONNECT	M22 Male
OUTLET - NOZZLE CONNECT	1/4" QC Coupler




**31" SPRAY LANCE**

PART NUMBER	80479
MAX PRESSURE	4500 PSI
MAX GPM	N/A
MAX TEMP	140° F
INLET - GUN CONNECT	M22 Male
OUTLET - NOZZLE CONNECT	1/4" QC Coupler




**48" INSULATED LANCE**

PART NUMBER	80179
MAX PRESSURE	5000 PSI
MAX GPM	N/A
MAX TEMP	212° F
INLET - GUN CONNECT	1/4" MNPT
OUTLET - NOZZLE CONNECT	1/4" QC Coupler



**O-RING & FILTER KIT**

PART NUMBER	80151
TWO FILTERS	One Size
TWO O-RING SETS	Five Sizes



## DID YOU KNOW?


- You should always replace any worn or broken nozzles as they can potentially be a safety hazard.
- You should always use accessories that are within your pressure washer's PSI range. Always refer to your product user manual for additional details.



### NOZZLES

**SET OF 5 SPRAY NOZZLES:**  
0°, 15°, 25°, 40° AND SOAP

PART NUMBER	80145	80146
MAX PRESSURE	3600 PSI	4500 PSI
MAX TEMP	212° F	212° F
NOZZLE SIZE	3.0, SOAP	4.0, SOAP
LANCE CONNECT	1/4" QC Plug	1/4" QC Plug




**SET OF 2 SECOND STORY NOZZLES:**  
WASH AND SOAP

PART NUMBER	80177
MAX PRESSURE	5000 PSI
MAX TEMP	212° F
NOZZLE SIZE	10.0, 40.0
LANCE CONNECT	1/4" QC Plug



**5-N-1 SPRAY NOZZLE:**  
0°, 15°, 25°, 40° AND SOAP

PART NUMBER	80142
MAX PRESSURE	3600 PSI
MAX TEMP	140° F
NOZZLE SIZE	2.8 - 3.2, SOAP
LANCE CONNECT	1/4" QC Plug





PREMIUM ACCESSORIES (CONT.)

OSCILLATING TURBO NOZZLES

LIMITED WARRANTY



PART NUMBER	80143	80144	80355	80356	80357	80358
MAX PRESSURE	3600	4500	5500	5500	5500	5500
MAX TEMP	212° F	212° F	212° F	212° F	212° F	212° F
NOZZLE SIZE	3.0	4.0	5.0	6.0	7.0	8.0
LANCE CONNECT	1/4" QC Plug	1/4" QC Plug	1/4" QC Plug	1/4" QC Plug	1/4" QC Plug	1/4" QC Plug

HOSE REELS



HOSE REELS

PART NUMBER	80399	80490	80403	80401
MAX PRESSURE	5000 PSI	5000 PSI	5000 PSI	5000 PSI
MAX TEMP	212° F	212° F	212° F	212° F
HOSE CAPACITY	100' x 3/8"	100' x 3/8" or 125' x 1/4"	200' x 3/8"	100' x 3/8" or 125' x 1/4"
MATERIAL	Heavy-duty Steel Construction	Heavy-duty Steel Construction	Heavy-duty Steel Construction	Heavy-duty Steel Construction

\*Does not have Hose Reel Guide

SURFACE CLEANERS

15" SURFACE CLEANER

PART NUMBER	80165
MAX PRESSURE	3700 PSI
MAX TEMP	140° F
LANCE CONNECT	1/4" Plug
MATERIAL	Powder Coated Steel Construction



20" COMMERCIAL SURFACE CLEANER

PART NUMBER	80182
MAX PRESSURE	4500 PSI
MAX TEMP	212° F
LANCE CONNECT	3/8" Plug
MATERIAL	Heavy-duty ABS
FILTER	High Pressure Inlet



PUMP CARE

PUMP GUARD

PART NUMBER	80130
CONTENT AMOUNT	12oz



PUMP GUARD- AEROSOL

PART NUMBER	88266
CONTENT AMOUNT	4oz




15W40 PUMP OIL

PART NUMBER	80138
CONTENT AMOUNT	16oz



With PowerBoost® technology, high water pressure levels trigger a bypass around the venturi nozzle, where chemical suction takes place, reducing pressure loss. Pumps with PowerBoost deliver higher pressure at the nozzle for improved impact and cleaning performance.

- HIGHER PRESSURE AT THE NOZZLE
- GREATER IMPACT AND CLEANING PERFORMANCE

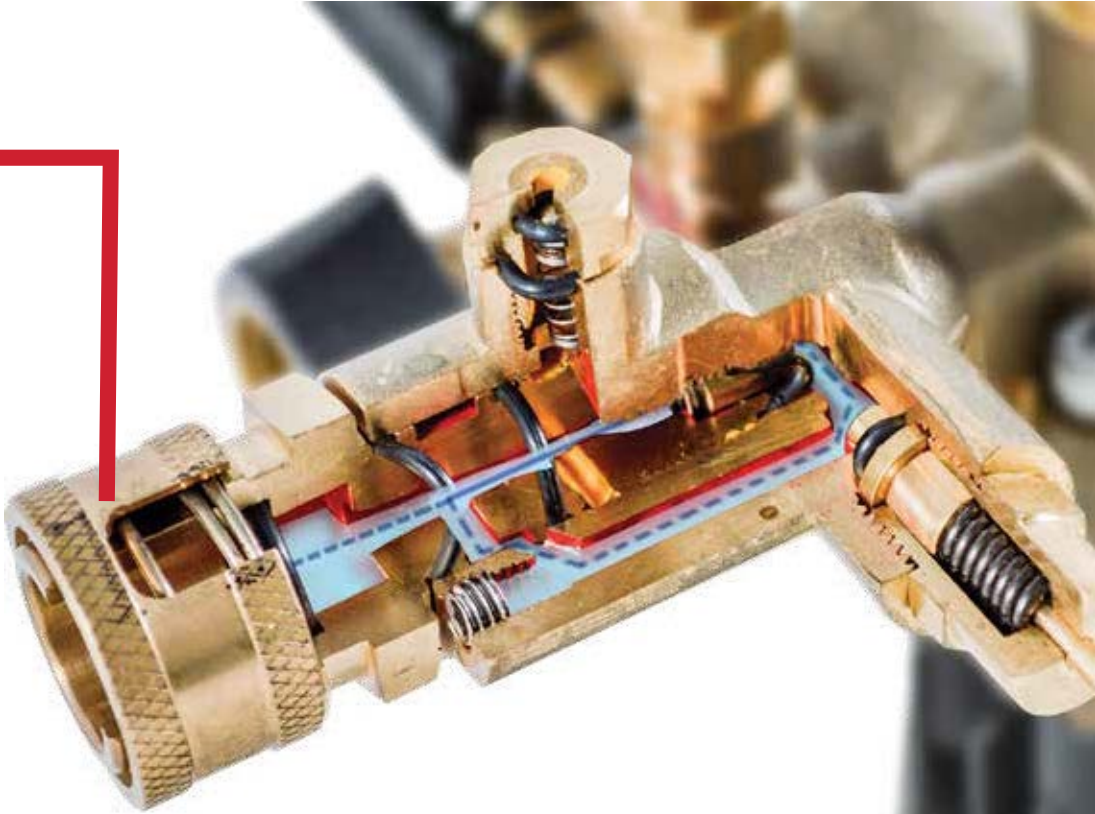

The Low Oil Shutdown (LOS) feature helps to prevent engine damage due to a low oil condition. LOS is an oil level sensor inside the engine crankcase. When the engine oil reaches a level that is too low for proper operation, the LOS will automatically stop the engine, indicating the oil needs to be refilled.




# PREMIUM PUMPS


All Pump Kits come fully plumbed. Includes:

- Pump
- Mounting hardware (Nuts & Bolts)
- Siphon hose with filter
- Shaft key
- Instruction booklet

## OEM TECHNOLOGIES™ AXIAL CAM PUMP KITS



Vertical Pump Kit Materials




PART NUMBER	90025	VERTICAL
MAX PRESSURE	2400 PSI	
MAX GPM	2.0 GPM	
MANIFOLD	Clear Anodized Aluminum Manifold	
UNLOADER	Integrated w/ Easy Start Unloader	
SHAFT SIZE	7/8" Shaft	
THREADING	Garden Hose Inlet/ M22 Outlet	
LIMITED WARRANTY	1yr	




PART NUMBER	90026	VERTICAL
MAX PRESSURE	3000 PSI	
MAX GPM	2.5 GPM	
MANIFOLD	Clear Anodized Aluminum Manifold	
UNLOADER	Integrated w/ Easy Start Unloader	
SHAFT SIZE	7/8" Shaft	
THREADING	Garden Hose Inlet/ M22 Outlet	
LIMITED WARRANTY	1yr	




PART NUMBER	90027	VERTICAL
MAX PRESSURE	3300 PSI	
MAX GPM	2.4 GPM	
MANIFOLD	Brass Manifold	
UNLOADER	Integrated w/ Easy Start Unloader	
SHAFT SIZE	7/8" Shaft	
THREADING	Garden Hose Inlet/ M22 Outlet	
LIMITED WARRANTY	1yr	



Horizontal Pump Kit Materials



PART NUMBER	90028	HORIZONTAL
MAX PRESSURE	3000 PSI	
MAX GPM	2.4 GPM	
MANIFOLD	Clear Anodized Aluminum Manifold	
UNLOADER	Integrated w/ Easy Start Unloader	
SHAFT SIZE	3/4" Shaft	
THREADING	Garden Hose Inlet/ M22 Outlet	
LIMITED WARRANTY	2yr	



PART NUMBER	90029	HORIZONTAL
MAX PRESSURE	3300 PSI	
MAX GPM	2.4 GPM	
MANIFOLD	Brass Manifold	
UNLOADER	Integrated w/ Easy Start Unloader	
SHAFT SIZE	3/4" Shaft	
THREADING	Garden Hose Inlet/ M22 Outlet	
LIMITED WARRANTY	2yr	

## AAA™ PUMP KITS



AAA™ Triplex Pump Kit Materials



PART NUMBER	90038	
MAX PRESSURE	3800 PSI	
MAX GPM	3.5 GPM	
MANIFOLD	Brass Manifold	
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader	
SHAFT SIZE	1" Shaft	
THREADING	Garden Hose Inlet/ QC Outlet	
LIMITED WARRANTY	5yr	




PART NUMBER	90039	
MAX PRESSURE	4000 PSI	
MAX GPM	3.5 GPM	
MANIFOLD	Brass Manifold	
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader	
SHAFT SIZE	1" Shaft	
THREADING	Garden Hose Inlet/ QC Outlet	
LIMITED WARRANTY	5yr	




PART NUMBER	90034	
MAX PRESSURE	4400 PSI	
MAX GPM	4.0 GPM	
MANIFOLD	Brass Manifold	
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader	
SHAFT SIZE	1" Shaft	
THREADING	Garden Hose Inlet/ QC Outlet	
LIMITED WARRANTY	5yr	

# PREMIUM PUMPS (CONT.)


## AAA™ PUMP KITS




Pump Kit Materials



PART NUMBER	90052
MAX PRESSURE	3500 PSI
MAX GPM	2.5 GPM
MANIFOLD	Brass Manifold
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	3/4" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet
LIMITED WARRANTY	3yr



PART NUMBER	90036
MAX PRESSURE	3200 PSI
MAX GPM	2.8 GPM
MANIFOLD	Brass Manifold
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	3/4" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet
LIMITED WARRANTY	5yr



PART NUMBER	90037
MAX PRESSURE	3700 PSI
MAX GPM	2.5 GPM
MANIFOLD	Brass Manifold
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	3/4" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet
LIMITED WARRANTY	5yr



Pump Kit Materials



PART NUMBER	90058
MAX PRESSURE	3000 PSI
MAX GPM	3.0 GPM
MANIFOLD	Brass Manifold
UNLOADER	Remote Unloader with Bypass Hose
SHAFT SIZE	3/4" Shaft
THREADING	Garden Hose Inlet/ QC Outlet
LIMITED WARRANTY	5yr




PART NUMBER	90057
MAX PRESSURE	3500 PSI
MAX GPM	4.0 GPM
MANIFOLD	Brass Manifold
UNLOADER	Remote Unloader with Bypass Hose
SHAFT SIZE	1" Shaft
THREADING	Garden Hose Inlet/ QC Outlet
LIMITED WARRANTY	5yr




PART NUMBER	90056
MAX PRESSURE	4400 PSI
MAX GPM	4.0 GPM
MANIFOLD	Brass Manifold
UNLOADER	Remote Unloader with Bypass Hose
SHAFT SIZE	1" Shaft
THREADING	Garden Hose Inlet/ QC Outlet
LIMITED WARRANTY	5yr


## AAA™ PUMP UNLOADERS




PART NUMBER	80362
MAX PRESSURE	3600 PSI
MAX GPM	12 GPM
MATERIAL	Brass Construction
THREADING	3/8" FTP Inlet/ QC Outlet
MAX TEMP	212° F




PART NUMBER	80361
MAX PRESSURE	4500 PSI
MAX GPM	12 GPM
MATERIAL	Brass Construction
THREADING	3/8" FTP Inlet/ QC Outlet
MAX TEMP	212° F




PART NUMBER	80404
MAX PRESSURE	5500 PSI
MAX GPM	12 GPM
MATERIAL	Brass Construction
THREADING	3/8" FTP Inlet/ QC Outlet
MAX TEMP	212° F




PART NUMBER	80405
MAX PRESSURE	6500 PSI
MAX GPM	12 GPM
MATERIAL	Stainless Steel Construction
THREADING	3/8" FTP Inlet/ QC Outlet
MAX TEMP	212° F



PART NUMBER	80364	BANJO UNLOADER
MAX PRESSURE	3600 PSI	
MAX GPM	12 GPM	
MATERIAL	Brass Construction	
THREADING	3/8" FTP Inlet/ QC Outlet	
MAX TEMP	212° F	



PART NUMBER	80363	BANJO UNLOADER
MAX PRESSURE	4500 PSI	
MAX GPM	12 GPM	
MATERIAL	Brass Construction	
THREADING	3/8" FTP Inlet/ QC Outlet	
MAX TEMP	212° F	

 - Indicates pump equipped with PowerBoost® see page 38 for details.



# INTERESTED IN BECOMING A **SIMPSON® DEALER?**

Partner with a vertically integrated manufacturer of outdoor power equipment as a SIMPSON® dealer and enjoy the following benefits:

- 1 Dedicated Account Representative to help grow your **SIMPSON** business
- 2 Access to exclusive sales promotions
- 3 Invitations to exclusive **DEALER ONLY** trade shows and events
- 4 View our full library of literature including promotional sales materials
- 5 Become your own service center and increase your business

**HAVE QUESTIONS?** CONTACT YOUR SALES REPRESENTATIVE AT: **SALES@SIMPSONCLEANING.COM**  
OR CALL US **1-847-348-1500**



## CETA CPC-100 CERTIFIED **TESTING STANDARDS**


Why choose a CETA Certified product?



- ✓ **PROFESSIONAL MEMBER BASE:**  
CETA has a membership base of over 200 entities from four different countries representing manufacturers, dealers, service providers, customers/end-users and associates.
- ✓ **TOP INDUSTRY RATINGS:**  
CETA only allows for products to operate within and no less than 90% of the product rating. This accounts for normal variances within the manufacturing process.
- ✓ **PRECISE TESTING STANDARDS:**  
CETA certified products are rated based on performance recorded using the **same** nozzle as opposed to utilizing skewed data from different nozzle sizes.
- ✓ **CERTIFIED PERFORMANCE:**  
The CETA standard provides the end-user with a pressure washer that is certified to perform as intended with any nozzle provided as OEM equipment.

For more information visit <https://ceta.org/cpc-100-performance-standard/>

# THANK YOU FOR **CHOOSING SIMPSON®**

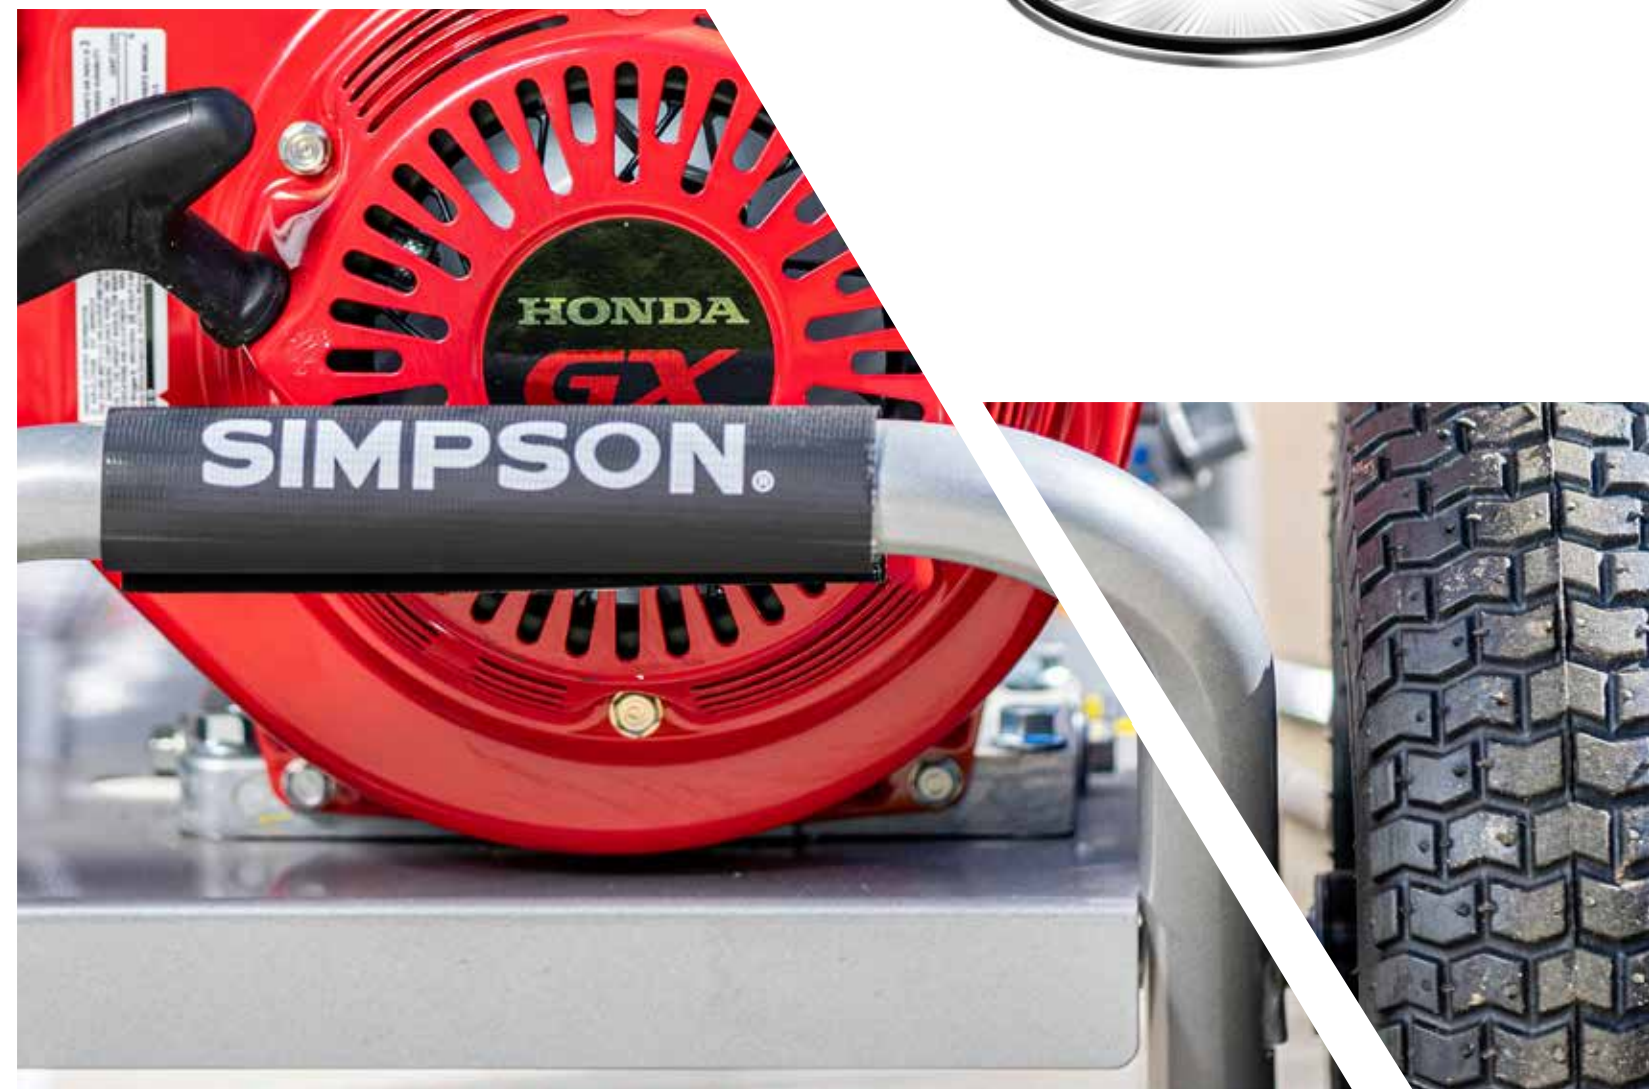





Driven by **PERFORMANCE™**

Disclaimer of liability: In the preparation of this catalog, every effort has been made to offer the most current, correct, and clearly expressed information as possible. Nevertheless, inadvertent errors in information may occur and information may become outdated. In particular, but without limiting anything stated herein, FNA Group, Inc. disclaims any responsibility for errors and accuracy or timeliness of the information that may be contained in this catalog, also reserves the right to make changes to its product line at any time without notice. If misleading, inaccurate or otherwise inappropriate information is brought to our attention, a reasonable effort will be made to fix or remove it. Please contact us at 1-847-348-1500 with any concerns.

FC01282021-V6

LEARN MORE AT [SIMPSONCLEANING.COM](https://www.simpsoncleaning.com) | CONNECT WITH US ON SOCIAL MEDIA: [SIMPSON\\_OPE](#)

