



Driven by *PERFORMANCE™*

2023 INDUSTRIAL CATALOG



PRESSURE WASHERS | MOBILE TRAILERS | PORTABLE GENERATORS & INVERTERS | HOSES | ACCESSORIES | PUMPS

POWERING YOUR WORLD SINCE 1961™

For over 60 years, SIMPSON® has built products to get the job done. We have led the industry in quality, innovation, reliability, and performance – and with over 60 years of industry-leading experience built into each of our products, it is easy to see why backyard heroes and job site champions everywhere prefer SIMPSON over the rest.

We're proud to build products that power your world.



PG 4 MEGASHOT™ SERIES

PG 5 POWERSHOT™ SERIES

PG 6 ALUMINUM SERIES

PG 7 ALUMINUM WATER BLASTER® SERIES

PG 8 WATER BLASTER® SERIES

PG 9 WATER SHOTGUN® SERIES

PG 10 INDUSTRIAL SERIES

PG 12 RENTAL SERIES

PG 14 SUPER PRO ROLL CAGE SERIES

PG 16 BRUTE SERIES

PG 18 TRAILER MOUNTED PRESSURE WASHERS

PG 22 PREMIUM PORTABLE GENERATORS & INVERTERS

COMMERCIAL SERIES

INDUSTRIAL SERIES

INVERTER GENERATORS AND PARALLEL BOX

PG 24 SAFE-T-SENSE

PG 26 PREMIUM PORTABLE TRASH PUMPS

PG 27 HIGH PERFORMANCE HOSES

PROFESSIONAL CLEANING SOLUTIONS

PREMIUM ACCESSORIES

PG 30 CRX® ENGINES

PG 31 LOW OIL SHUTDOWN TECHNOLOGY

PG 32 PRESSURE WASHER PUMP KITS

POWERBOOST® TECHNOLOGY

PG 34 PATRIOT SERIES

PG 35 COBALT SERIES

PG 36 STREAMLINER SERIES

PG 37 ELIMINATOR SERIES

PG 39 VERSA SERIES

PG 40 EQUALIZER SERIES

PG 41 DOMINATOR SERIES

CWE PORTABLE SERIES

PG 42 MOBILE TRAILER SERIES

RESIDENTIAL COLD WATER GAS PRESSURE WASHERS

MEGASHOT® SERIES

The SIMPSON® MegaShot Series is perfect for the “Do-it-Yourselfer” looking for maximum performance with minimal investment. Simple to use and great for cleaning decks, patios, outdoor furniture, house siding, and prepping home exteriors for painting. Its compact design is lightweight and small enough to be easily transported by one person.

UNITS INCLUDE

- Hose
- Lance
- Gun
- Nozzles
- Engine oil 10W-30
- Siphon hose (excludes units with on-board soap tank)

LIMITED WARRANTY

MS61220(-S)	5yr Frame, 1yr Pump, 2yr Engine
MS61224(-S)	5yr Frame, 2yr Pump, 2yr Engine
MSH3125-S	5yr Frame, 1yr Pump, 2yr Engine



MSH3125-S



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE	PUMP	SPRAY GUN	SPRAY LANCE	NOZZLE	HOSE	TIRE/ WHEEL
MS61220(-S) ¹	61220 (61221S)	3000 PSI 2.4 GPM	*CRX® 210	OEM Technologies™ Axial Cam	Front Load Spray Gun	16"	4 nozzle tips: 0°, 15°, 40° and soap	1/4" x 25' x M22, HyFlex™	12" Never-flat
MS61224(-S) ²	61224 (61224S)	3300 PSI 2.4 GPM	HONDA® GCV200	OEM Technologies™ Axial Cam	Front Load Spray Gun	16"	4 nozzle tips: 0°, 15°, 40° and soap	1/4" x 25' x M22 MorFlex®	12" Never-flat

PUMP

- OEM TECHNOLOGIES™ AXIAL CAM PUMP
- Thermal Relief Valve
 - Integrated w/Easy Start Unloader
 - Garden Hose Inlet/ Threaded M22 Outlet

FRAME

- Welded steel frame construction with a powder-coated finish for durability and corrosion resistance

HOSES

- MorFlex® high-pressure hose is non-marring, flexible and abrasion-resistant with polyurethane outer jacket
- HyFlex™ high-pressure hose is highly flexible and abrasion-resistant

WHEELS/TIRES

- Premium never-flat wheels and pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

ENGINE

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210	208cc	1.0 gal
HONDA® GCV200	201cc	.24 gal
HONDA® GC190	187cc	.48 gal

DIMENSIONS AND WEIGHT

MS61220(-S)	L: 24" x W: 18" x 40" 58 lbs
MS61224(-S)	L: 24" x W: 18" x 40" 75 lbs
MSH3125-S	L: 24" x W: 21" x 24" 66 lbs



MS61220(-S)

MS61224(-S)

¹ - 49 State Compliant
² - 50 State Compliant
* - Indicates engine is equipped with Low Oil Shutdown Technology

COMMERCIAL COLD WATER GAS PRESSURE WASHERS

POWERSHOT® SERIES

The SIMPSON® PowerShot® Series is designed to meet the rigorous demands of the cleaning pro. Heavy-duty pressure washers with flow and reliability. Perfect for contractors who specialize in deck cleaning, wood restoration, paint preparation, graffiti removal, and all other professional cleaning services.

UNITS INCLUDE

- Hose
- Lance
- Gun
- Nozzles
- Engine oil 10W-30
- Siphon tube

LIMITED WARRANTY

PS60869	10yr Frame, 5yr Pump, 3yr Engine
PS4240	10yr Frame, 5yr Pump, 3yr Engine
PS60141(-S)	10yr Frame, 5yr Pump, 3yr Engine

PS60869



Look for this symbol on select ETL Certified models



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE	PUMP	SPRAY GUN	SPRAY LANCE	NOZZLE	HOSE	TIRE/ WHEEL
PS60869 ¹	60869	4000 PSI 3.5 GPM	*HONDA® GX270	AAA® Triplex	Rear Load Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Premium Pneumatic
PS4240 ¹	60456	4200 PSI 4.0 GPM	*HONDA® GX390	AAA® Triplex	Rear Load Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Premium Pneumatic

PS61041(-S) ²	61041 (60843)	4400 PSI 4.0 GPM	*CRX® 420	AAA® Triplex	Rear Load Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Premium Pneumatic
--------------------------	---------------	------------------	-----------	--------------	---------------------	-----	---	--------------------------	-----------------------

PUMP

- AAA® Industrial Triplex Plunger Pump
- Forged Brass Head
 - Thermal Relief Valve
 - Integrated Unloader
 - Ceramic Coated Plungers
 - Garden Hose Inlet/QC Outlet

FRAME

- Welded steel frame construction with a powder-coated finish for durability and corrosion resistance

HOSES

- The Monster Hose is a steel-braided kink and abrasion resistant hose, with quick connect fittings and polyurethane outer jacket

WHEELS/TIRES

- 13" Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

¹ - 49 State Compliant
² - 50 State Compliant
* - Indicates engine is equipped with Low Oil Shutdown Technology

ENGINES

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
HONDA® GX270	270cc	1.4 gal
HONDA® GX390	389cc	1.6 gal
CRX® 420	420cc	2.0 gal

DIMENSIONS AND WEIGHT

PS60869	L:38" x W:23.5" x H:29" 120 Lbs
PS4240	L:38" x W:23.5" x H:29" 136 Lbs
PS61041(-S)	L:38" x W:23.5" x H:29" 138 Lbs



COMMERCIAL COLD WATER GAS PRESSURE WASHERS

ALUMINUM® SERIES

Designed to meet the rigorous demands of the cleaning professional, the SIMPSON® Aluminum Series frame is crafted of aircraft-grade aluminum, making it lighter in weight than most steel frame pressure washer designs. Perfect for contractors who specialize in deck cleaning, wood restoration, paint preparation, graffiti removal, and all other professional cleaning services

UNIT INCLUDES

- Hose

• Lance

• Gun
- Nozzles

• Engine oil 10W-30

• Siphon hose

LIMITED WARRANTY

ALH3228-S	10yr Frame, 5yr Pump, 3yr Engine
ALH3425-S	10yr Frame, 5yr Pump, 3yr Engine
ALH4240-S	10yr Frame, 5yr Pump, 3yr Engine
ALH4440-S	10yr Frame, 5yr Pump, 3yr Engine



ALH3228-S

Look for this symbol on select ETL Certified models



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE	PUMP	SPRAY GUN	SPRAY LANCE	NOZZLE	HOSE	TIRE/ WHEEL
ALH3228-S ^{1 2}	60735	3400 PSI 2.5 GPM	*HONDA® GX200	CAT PUMPS® Triplex	Rear Load Spray Gun	16"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	5/16" x 25' x QC, Monster	10" Premium Pneumatic
ALH3425-S ^{1 2}	60689	3600 PSI 2.5 GPM	*HONDA® GX200	AAA® Triplex	Rear Load Spray Gun	16"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	5/16" x 35' x M22 MorFlex®	10" Premium Pneumatic
ALH4240-S ¹	60688	4200 PSI 4.0 GPM	*HONDA® GX390	CAT PUMPS® Triplex	Rear Load Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Premium Pneumatic
ALH4440-S ²	61252	4400 PSI 4.0 GPM	*CRX® 420	CAT PUMPS® Triplex	Rear Load Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Premium Pneumatic

PUMP

AAA® TRIPLEX PLUNGER PUMP

- Forged Brass Head
- Ceramic Coated Plungers
- Thermal Relief Valve
- Integrated & Adjustable w/Easy Start Unloader
- Garden Hose Inlet/M22 Threaded Outlet

CAT PUMP® TRIPLEX

- Thermal Relief Valve
- Integrated w/Easy Start Unloader
- Garden Hose Inlet/QC Outlet

FRAME

- Aircraft-grade aluminum frame is lighter in weight than most steel frame designs

HOSES

- MorFlex® high-pressure hose is non-marring, flexible and abrasion-resistant
- The Monster Hose is a steel-braided kink and abrasion resistant hose, with quick connect fittings and polyurethane outer jacket

ENGINE



ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	2.0 gal
HONDA® GX200	196cc	.83 gal
HONDA® GX390	389cc	1.6 gal

WHEELS/TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle for use for a variety of cleaning applications

DIMENSIONS AND WEIGHT

ALH3228-S	L: 21" x W: 24" x 34" 81 lbs
ALH3425-S	L: 21" x W: 24" x 24" 78 lbs
ALH4240-S	L: 38" x W: 23.5" x 29" 133 lbs
ALH4440-S	L: 38" x W: 23.5" x 29" 133 lbs

¹ - 49 State Compliant
² - 50 State Compliant
* - Indicates engine is equipped with Low Oil Shutdown Technology

COMMERCIAL COLD WATER GAS PRESSURE WASHERS

ALUMINUM WATER BLASTER® SERIES

Designed to meet the rigorous demands of the cleaning professional, the SIMPSON® Aluminum Water Blaster series frame is crafted of aircraft-grade aluminum, making it lighter in weight than most steel frame pressure washer designs. Perfect for contractors who specialize in deck cleaning, wood restoration, paint preparation, graffiti removal, and all other professional cleaning services. The SIMPSON Aluminum Water Blaster series designed for optimum performance in the harshest environments.

UNITS INCLUDE

- Hose

•Lance

•Gun
- Nozzles

•Engine oil 10W-30

•Siphon tube

LIMITED WARRANTY

ALWB60827	10yr Frame, 5yr Pump, 3yr Engine
ALWB60828	10yr Frame, 5yr Pump, 3yr Engine
ALWB60825	10yr Frame, 5yr Pump, 3yr Engine



ALWB60828

Look for this symbol on select ETL Certified models



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE	PUMP	SPRAY GUN	SPRAY LANCE	NOZZLE	HOSE	TIRE/ WHEEL
ALWB60827 ¹	60827	4200 PSI 4.0 GPM	*HONDA® GX390	AAA® Triplex	Rear Load Spray Gun	48"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Premium Pneumatic
ALWB60828 ¹	60828	4200 PSI 4.0 GPM	*HONDA® GX390	CAT PUMPS® Triplex	Rear Load Spray Gun	48"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Premium Pneumatic
ALWB60825 ²	60825	4400 PSI 4.0 GPM	*CRX® 420	AAA® Triplex	Rear Load Spray Gun	48"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Premium Pneumatic

PUMPS

AAA® Industrial Triplex Plunger Pump

- Forged Brass Head
- Ceramic Coated Plungers
- Thermal Relief Valve
- External unloader with bypass hose
- Garden Hose Inlet/ QC Outlet

CAT PUMPS® Triplex

- Thermal Relief Valve
- External unloader with bypass hose
- Garden Hose Inlet/QC Outlet

FRAME

- Aircraft-grade aluminum frame is lighter in weight than most steel frame designs

¹ - 49 State Compliant
² - 50 State Compliant
* - Indicates engine is equipped with Low Oil Shutdown Technology

HOSES

- The Monster Hose is a steel-braided kink and abrasion resistant hose, with quick connect fittings and polyurethane outer jacket

WHEELS/TIRES

- 13" Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle for use for a variety of cleaning applications

ENGINES



ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
HONDA® GX390	389cc	1.6 gal
CRX® 420	420cc	2.0 gal

DIMENSIONS AND WEIGHT

ALWB60827	L:46" x W:26" x H:25" 146 Lbs
ALWB60828	L:46" x W:26" x H:25" 146 Lbs
ALWB60825	L:44.5" x W:26" x H:25" 143 Lbs

COMMERCIAL COLD WATER GAS PRESSURE WASHERS

WATER BLASTER® SERIES

Designed to meet the rigorous demands of the cleaning professional, the SIMPSON® Water Blaster® series is perfect for contractors who specialize in deck cleaning, wood restoration, paint preparation, graffiti removal, and all other professional cleaning services. The SIMPSON Water Blaster series designed for optimum performance in the harshest environments.

UNITS INCLUDE

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Gun
- Siphon tube

LIMITED WARRANTY

WB4200	10yr Frame, 5yr Pump, 3yr Engine
WB60824	10yr Frame, 5yr Pump, 3yr Engine



WB4200

Look for this symbol on select ETL Certified models



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE	PUMP	SPRAY GUN	SPRAY LANCE	NOZZLE	HOSE	TIRE/ WHEEL
WB4200 ¹	60205	4200 PSI 4.0 GPM	*HONDA® GX390	AAA® Triplex	Rear Load Spray Gun	48"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Premium Pneumatic
WB60824 ²	60824	4400 PSI 4.0 GPM	*CRX® 420	AAA® Triplex	Rear Load Spray Gun	48"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Premium Pneumatic

PUMP

- AAA® Industrial Triplex Plunger Pump
- Forged Brass Head
 - Ceramic Coated Plungers
 - Thermal Relief Valve
 - External unloader with bypass hose
 - Garden Hose Inlet/ QC Outlet

FRAME

- Welded steel frame construction with a powder-coated finish for durability and corrosion resistance

HOSES

- The Monster Hose is a steel-braided kink and abrasion resistant hose, with quick connect fittings and polyurethane outer jacket

WHEELS/TIRES

- 13" Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle for use for a variety of cleaning applications

ENGINES

LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	2.0 gal
HONDA® GX390	389cc	1.6 gal

DIMENSIONS AND WEIGHT

WB4200	L:46" x W:26" x H:25" 159 Lbs
WB60824	L:46" x W:26" x H:25" 159 Lbs



¹ - 49 State Compliant
² - 50 State Compliant
* - Indicates engine is equipped with Low Oil Shutdown Technology

INDUSTRIAL COLD WATER GAS PRESSURE WASHERS

WATER SHOTGUN® SERIES

The Water Shotgun is easy to use and designed for the deepest of cleaning. Perfect for paint preparation, professional cleaning services, graffiti removal, industrial job sites, and fleet maintenance. Its dual-belt system separates the engine and pump, preventing overheating and pump fatigue, resulting in greater efficiency and greater longevity in the engine and pump life.

UNIT INCLUDES

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Gun
- Siphon hose

LIMITED WARRANTY

WS5050131E	10yr Frame, 5yr Pump, 3yr Engine
WS5050231E	10yr Frame, 5yr Pump, 3yr Engine



WS5050231E

Look for this symbol on select ETL Certified models



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE	PUMP	SPRAY GUN	SPRAY LANCE	NOZZLE	HOSE	TIRE/ WHEEL
WS5050131E ^{1,3}	61272	5000 PSI 5.0 GPM	*CRX® 680 / E-Start	COMET Industrial Triplex	Rear Load QC Spray Gun	48"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, R2 Wrapper Rubber	13" Premium Aluminum
WS5050231E ^{1,3}	60243	5000 PSI 5.0 GPM	*HONDA® GX690 / E-Start	COMET Industrial Triplex	Rear Load QC Spray Gun	48"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, R2 Wrapper Rubber	13" Premium Aluminum

PUMP

- COMET INDUSTRIAL TRIPLEX PUMP
- Slow Speed
 - Thermal Relief Valve
 - Forged Brass Head
 - Heat-Resistant Solid Ceramic Plungers
 - Operating on Lubricated Packings
 - External Unloader with Bypass Hose

FRAME

- Bolted steel frame construction with a powder-coated finish for durability and corrosion resistance

HOSES

- R2 Dual steel-braided hose with wrapped rubber outer jacket and bend protectors

WHEELS/TIRES

- Premium aluminum tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle for use for a variety of cleaning applications

ENGINE

LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 680	678cc	External 6 gal
HONDA® GX690	688cc	External 6 gal

DIMENSIONS AND WEIGHT

WS5050131E	L: 46" x W: 29" x 26.5" 277 lbs
WS5050231E	L: 49" x W: 29" x 26.5" 214 lbs



WS5050131E



Includes 6 gallon external fuel tank

¹ - 49 State Compliant
² - 50 State Compliant
³ - 12V Battery not included
* - Indicates engine is equipped with Low Oil Shutdown Technology

INDUSTRIAL COLD WATER GAS PRESSURE WASHERS

INDUSTRIAL SERIES

Industrial Series pressure washer is an excellent addition to the portfolio of pressure washer cleaning products of SIMPSON®. Perfect for construction sites, rental yards, oil fields, heavy-duty paint prep, and any other big job.

UNIT INCLUDES

- Hose
 - Lance
 - Gun
- Nozzles
 - Engine oil 10W-30
 - Siphon hose

LIMITED WARRANTY

IS1520012A	5yr Frame, 5yr Pump, 1yr Motor
IS2727212	10yr Frame, 3yr Pump, 2yr Engine
IS3027212 & IS3027112	10yr Frame, 3yr Pump, 3yr Engine
IS3030212 & IS3030112	10yr Frame, 7yr Pump, 3yr Engine
IS3540212 & IS3540112	10yr Frame, 7yr Pump, 3yr Engine
IS4240261	10yr Frame, 5yr Pump, 3yr Engine
IS4240131	10yr Frame, 7yr Pump, 3yr Engine
IS4440112	10yr Frame, 7yr Pump, 3yr Engine
IS4440212 & IS4440112	10yr Frame, 7yr Pump, 3yr Engine



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE/ MOTOR	PUMP/ DRIVE	SPRAY GUN	SPRAY LANCE	NOZZLE	HOSE	TIRE/ WHEEL
IS1520012A ◊	61129	1500 PSI 2.0 GPM	120V Electric Brushless	AAA® Industrial Triplex Direct	Rear Load Spray Gun	16"	4 nozzle tips: 15°, 25°, 40° and soap	5/16" x 25' x QC, Monster	N/A
IS2727222¹	61023	2700 PSI 2.7 GPM	HONDA® GC190	AAA® AX300 PRO Axial Cam Pump Direct	Rear Load QC Spray Gun	16"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	5/16" x 50' x QC, Monster	10" Foam Filled
IS3027222²	61022	3000 PSI 2.7 GPM	*HONDA® GX200	AAA® AX300 PRO Axial Cam Pump Direct	Rear Load QC Spray Gun	16"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	5/16" x 50' x QC, Monster	10" Foam Filled
IS3027122²	61277	3000 PSI 2.7 GPM	*CRX® 210	AAA® AX300 PRO Axial Cam Pump Direct	Rear Load QC Spray Gun	16"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	5/16" x 50' x QC, Monster	10" Foam Filled
IS3030212 ◊ ¹	61024	3000 PSI 3.0 GPM	*HONDA® GX200	AAA® Industrial Triplex Direct	Rear Load QC Spray Gun	16"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	10" Foam Filled
IS3030112²	61279	3000 PSI 3.0 GPM	*CRX® 210	AAA® Industrial Triplex Direct	Rear Load QC Spray Gun	16"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	10" Foam Filled
IS3540212 ◊ ²	61026	3500 PSI 4.0 GPM	*HONDA® GX270	AAA® Industrial Triplex Direct	Rear Load QC Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled
IS3540112¹	61280	3500 PSI 4.0 GPM	*CRX® 275	AAA® Industrial Triplex Direct	Rear Load QC Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled
IS4240231 ◊ ¹	61030	4200 PSI 4.0 GPM	*HONDA® 390	COMET® Industrial Triplex Belt	Rear Load QC Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled

¹ - 49 State Compliant
² - 50 State Compliant
* - Indicates engine is equipped with Low Oil Shutdown Technology

INDUSTRIAL COLD WATER GAS PRESSURE WASHERS

INDUSTRIAL SERIES CONT.

MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE/ MOTOR	PUMP/ DRIVE	SPRAY GUN	SPRAY LANCE	NOZZLE	HOSE	TIRE/ WHEEL
IS4440112 ◊ ²	61029	4400 PSI 4.0 GPM	*CRX® 420	AAA® Industrial Triplex Direct	Rear Load QC Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled
IS4440212 ◊ ¹	61028	4400 PSI 4.0 GPM	*HONDA® GX390	AAA® Industrial Triplex Direct	Rear Load QC Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled
IS4440112¹	61281	4400 PSI 4.0 GPM	*CRX® 420	AAA® Industrial Triplex Direct	Rear Load QC Spray Gun	31"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled

PUMP

- AAA® AX300 PRO AXIAL CAM PUMP**
- Forged Brass Head
 - Thermal Relief Value
 - Integrated Unloader
 - Maintenance Free
 - Garden Hose Inlet/Threaded M22 Outlet

- AAA® TRIPLEX PUMP**
- Forged Brass Head
 - Ceramic Coated Plungers
 - Thermal Relief Value
 - Integrated Unloader (on 61129)
 - External unloader with bypass hose
 - Garden Hose Inlet/QC Outlet

- COMET INDUSTRIAL TRIPLEX PUMP**
- Slow Speed
 - Thermal Relief Valve
 - Forged Brass Head
 - Heat-Resistant Solid Ceramic Plungers Operating on Lubricated Packings
 - External Unloader with Bypass Hose

FRAME

- Welded steel frame construction with a powder-coated finish for durability and corrosion resistance (on 61023)
- Aircraft-grade aluminum frame is lighter in weight than most steel frame designs

HOSES

- The Monster Hose is a steel-braided kink and abrasion resistant hose, with quick connect fittings and polyurethane outer jacket

NOZZLES

- Quick connect nozzle for use for a variety of cleaning applications

ENGINE

ENGINE / MOTOR	POWER/ DISPLAMENT	FUEL TANK CAPACITY
120V Electric Brushless	120V/1Ph	N/A
CRX® 210	208cc	1.0 gal
CRX® 275	272cc	1.2 gal
CRX® 420	420cc	2.0 gal
HONDA® GC190	186cc	.48 gal
HONDA® GX200	196cc	.83 gal
HONDA® GX270	270cc	1.4 gal
HONDA® GX390	389cc	1.6 gal

WHEELS/TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

DIMENSIONS AND WEIGHT

IS1520012A	L:18" x W:13" x H:17" 47 Lbs
IS2727212	L:20.5" x W:23" x H:31" 72 Lbs
IS3027212	L:20.5" x W:23" x H:31" 76 Lbs
IS3027112	L:20.5" x W:23" x H:31" 76 Lbs
IS3030212	L:20.5" x W:23" x H:32" 83 Lbs
IS3540212	L:23.5" x W:27.5" x H:37" 115 Lbs
IS3030112	L:23.5" x W:27.5" x H:37" 115 Lbs
IS4240261	L:26" x W:25" x H:44.5" 154 Lbs
IS4240131	L:23.5" x W:27.5" x H:37" 128 Lbs
IS3540112	L:23.5" x W:27.5" x H:37" 128 Lbs
IS4240231	L:26" x W:25" x H:45" 154 Lbs
IS4440112	L:23.5" x W:27.5" x H:37" 128 Lbs
IS4440212	L:23.5" x W:27.5" x H:37" 126 Lbs
IS4440112	L:23.5" x W:27.5" x H:37" 126 Lbs

¹ - 49 State Compliant
² - 50 State Compliant
* - Indicates engine is equipped with Low Oil Shutdown Technology



INDUSTRIAL COLD WATER GAS PRESSURE WASHERS

RENTAL SERIES

Complete with standard features including; an hour meter, heavy-duty water inlet filter, steel braided Monster hose with QC fittings, and specific set-up & use instructions printed on the steel dashboards. Be confident in the added durability of the heavy-duty aluminum frames

UNIT INCLUDES

- Hose
 - Lance
 - Gun
- Nozzles
 - Engine oil 10W-30
 - Siphon hose

LIMITED WARRANTY

IR1520012A	5yr Frame, 5yr Pump, 1yr Motor
IR2030012B	10yr Frame, 3yr Pump, 2yr Engine
IR2535012B	10yr Frame, 3yr Pump, 3yr Engine
IR3040012B	10yr Frame, 7yr Pump, 3yr Engine
IR2730212	10yr Frame, 7yr Pump, 3yr Engine
IR3030212 & IR3030112	10yr Frame, 5yr Pump, 3yr Engine
IR3540212	10yr Frame, 7yr Pump, 3yr Engine
IR4440112	10yr Frame, 7yr Pump, 3yr Engine
IR4440212 & IR4440112	10yr Frame, 7yr Pump, 3yr Engine



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE/ MOTOR	PUMP/ DRIVE	SPRAY GUN	SPRAY LANCE	NOZZLE	HOSE	TIRE/ WHEEL
IR1520012A ¹	61094	1500 PSI 2.0 GPM	120V Electric 1.5hp	AAA® Industrial Triplex Direct	Rear Load Spray Gun	16"	4 nozzle tips: 15°, 25°, 40° and soap	3/8" x 25' x QC, Monster	8" Never-Flats
IR2030012B ¹	61130	2000 PSI 3.0 GPM	230V Electric 3hp	AAA® Industrial Triplex Direct	Rear Load Spray Gun	36"	4 nozzle tips: 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled
IR2535012B ¹	61131	2500 PSI 3.5 GPM	230V Electric 5hp	AAA® Industrial Triplex Direct	Rear Load Spray Gun	36"	4 nozzle tips: 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled
IR3040012B ¹	61132	3000 PSI 4.0 GPM	230V Electric 7.5hp	AAA® Industrial Triplex Direct	Rear Load Spray Gun	36"	4 nozzle tips: 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	10" Foam Filled
IR2730212 ¹ ²	61143	2700 PSI 3.0 GPM	*HONDA® GX200	AAA® Industrial Triplex Direct	Rear Load Spray Gun	36"	4 nozzle tips: 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled
IR3030212 ¹ ²	61095	3000 PSI 3.0 GPM	*HONDA® GX200	AAA® Industrial Triplex Direct	Rear Load Spray Gun	36"	4 nozzle tips: 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	10" Foam Filled
IR3030112 ²	61282	3000 PSI 3.0 GPM	*CRX® 210	AAA® Industrial Triplex Direct	Rear Load Spray Gun	36"	4 nozzle tips: 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	10" Foam Filled
IR3540212 ¹ ²	61133	3500 PSI 4.0 GPM	*HONDA® GX270	AAA® Industrial Triplex Direct	Rear Load Spray Gun	36"	4 nozzle tips: 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled
IR4440112 ¹ ²	61134	4400 PSI 4.0 GPM	*CRX® 420	AAA® Industrial Triplex Direct	Rear Load Spray Gun	36"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled
IR4440212 ¹ ²	61096	4400 PSI 4.0 GPM	*HONDA® GX390	AAA® Industrial Triplex Direct	Rear Load Spray Gun	36"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled
IR4440112 ¹	61283	4400 PSI 4.0 GPM	*CRX® 420	AAA® Industrial Triplex Direct	Rear Load Spray Gun	36"	5 nozzle tips: 0°, 15°, 25°, 40° and soap	3/8" x 50' x QC, Monster	13" Foam Filled

INDUSTRIAL COLD WATER GAS PRESSURE WASHERS

RENTAL SERIES CON'T

PUMP

AAA® INDUSTRIAL TRIPLEX PUMP

- Forged Brass Head
- Ceramic Coated Plungers
- Thermal Relief Value
- Integrated Unloader (on 61094)
- External unloader with bypass hose
- Garden Hose Inlet/QC Outlet

FRAME

- Aircraft-grade aluminum frame is lighter in weight than most steel frame designs
- Black welded heavy gauge steel frame, powdered coated for corrosion resistance.

HOSE

- The Monster Hose is a steel-braided kink and abrasion resistant hose, with quick connect fittings and polyurethane outer jacket

WHEELS/TIRES

- Premium never-flats / pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle for use for a variety of cleaning applications

ENGINE

ENGINE / MOTOR	POWER/ DISPLACEMENT	FUEL TANK CAPACITY
120V Electric	120V/1Ph	N/A
230V Electric	230V/1Ph	N/A
CRX® 210	208cc	1.0 gallon
CRX® 420	420cc	2.0 gallon
HONDA® GX200	196cc	.24 gallon
HONDA® GX270	270cc	1.4 gallon
HONDA® GX390	389cc	1.6 gallon

DIMENSIONS AND WEIGHT

IR1520012A	L:26" x W:22" x H:24" 87 Lbs
IR2030012B	L 48" x W 27" x H24 176 lbs
IR2535012B	L 48" x W 27" x H24 176 lbs
IR3040012B	L 48" x W 27" x H24 176 lbs
IR2730212	L:48" x W:40" x H:23.25" 95 Lbs
IR3030212	L:30" x W:25" x H:28" 92 Lbs
IR3540212	L:48" x W:40" x H:23.25" 132 Lbs
IR4440112	L:48" x W:40" x H:23.25" 142 Lbs
IR4440212	L:48" x W:40" x H:23.25" 139 Lbs

¹ - 49 State Compliant

² - 50 State Compliant

* - Indicates engine is equipped with Low Oil Shutdown Technology



INDUSTRIAL HOT WATER GAS PRESSURE WASHERS

BRUTE SERIES

Removing heavy grease, oil, salt, and algae can be a tough job but SIMPSON's hot water line is up to the task. With sizes ranging from the Mini Brute to the Super Brute, there's a SIMPSON hot-water machine ready to take on the toughest jobs no matter how big or small.

UNITS INCLUDE

- Hose
 - Lance
 - Gun
- Nozzles
 - Engine oil 10W-30
 - Siphon tube



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE/MOTOR	PUMP	ENGINE FUEL CAPACITY	BURNER FUEL CAPACITY	DRIVE	START	TIRE/WHEEL
MB1518012A	60363 ²	1500 PSI 1.8 GPM	120V Electric	AAA® Industrial Triplex	N/A	4.0 gal Diesel	Direct Drive	Electric	13" Premium Pneumatic
KB4040112	65132 ^{2,**}	4000 PSI 4.0 GPM	*CRX® 420	AAA® Industrial Triplex	2 gal Gasoline	5 gal Diesel	Direct Drive	E-Start	13" Premium Pneumatic
KB4040252	65133 ^{1,**}	4000 PSI 4.0 GPM	*HONDA® GX390	General Pump® Industrial Triplex	1.6 gal Gasoline	5 gal Diesel	Direct Drive	E-Start	13" Premium Pneumatic
BB4040232E	65106 ^{1,**}	4000 PSI 4.0 GPM	*HONDA® GX390	COMET Industrial Triplex	11 gal Gasoline	5.0 gal Diesel	Direct Drive	Recoil/ E-Start	10" Premium Pneumatic
BB4040332E	65105 ^{1,**}	4000 PSI 4.0 GPM	*VANGUARD® 479cc	COMET Industrial Triplex	11 gal Gasoline	5.0 gal Diesel	Direct Drive	E-Start	10" Premium Pneumatic
BB4040342E	65108 ^{1,**}	4000 PSI 4.0 GPM	*VANGUARD® 479cc	UDOR Industrial Triplex	11 gal Gasoline	5.0 gal Diesel	Gear Drive	E-Start	10" Premium Pneumatic
BB4040132	65129 ^{1,**}	4000 PSI 4.0 GPM	*CRX® 420	COMET Industrial Triplex	11 gal Gasoline	5.0 gal Diesel	Direct Drive	Recoil/ E-Start	10" Premium Pneumatic
SB3555331E	65110 ^{1,**}	3500 PSI 5.5 GPM	*VANGUARD® 570cc	COMET Industrial Triplex	10 gal Gasoline	10 gal Diesel	Belt Drive	E-Start	Forklift Feet
SB3555251E	65123 ^{1,**}	3500 PSI 5.5 GPM	*HONDA® GX690	General Pump® Industrial Triplex	10 gal Gasoline	10 gal Diesel	Belt Drive	E-Start	Forklift Feet
SB3555131E	65127 ^{1,**}	3500 PSI 5.5 GPM	*CRX® 680	COMET Industrial Triplex	10 gal Gasoline	10 gal Diesel	Belt Drive	E-Start	Forklift Feet
SB3555231E	65134 ^{1,**}	3500 PSI 5.5 GPM	*HONDA® GX690	COMET Industrial Triplex	10 gal Gasoline	10 gal Diesel	Belt Drive	E-Start	Forklift Feet
SBD4060551E	65122 ^{2,**}	4000 PSI 6.0 GPM	*KOHLER® KDW1003 Diesel	General Pump® Industrial Triplex	30 gal Diesel w/ 1 tank	30 gal Diesel w/ 1 tank	Belt Drive	E-Start	Forklift Feet

¹ - 49 State Compliant
² - 50 State Compliant
* - Indicates engine is equipped with Low Oil Shutdown Technology
** - Battery not included. Recommend 12V Garden tractor battery type U1.

INDUSTRIAL HOT WATER GAS PRESSURE WASHERS

BRUTE SERIES CONT.

LIMITED WARRANTY

MB1518012A	10yr Frame, 5yr Pump, 1yr Motor
KB4040112	10yr Frame, 5yr Pump, 3yr Engine
KB4040252	10yr Frame, 5yr Pump, 3yr Engine
BB4040232E	10yr Frame, 5yr Pump, 3yr Engine
BB4040332E	10yr Frame, 5yr Pump, 3yr Engine
BB4040342E	10yr Frame, 7yr Pump, 3yr Engine
BB4040132E	10yr Frame, 5yr Pump, 3yr Engine
SB3555331E	10yr Frame, 5yr Pump, 3yr Engine
SB3555251E	10yr Frame, 5yr Pump, 3yr Engine
SB3555131E	10yr Frame, 5yr Pump, 3yr Engine
SB3555231E	10yr Frame, 5yr Pump, 3yr Engine
SBD4060551E	10yr Frame, 5yr Pump, 3yr Engine

PUMPS

- AAA® Industrial Triplex Plunger Pump**
- Forged Brass Head
 - Ceramic Coated Plungers
 - Thermal Relief Valve
 - External Unloader with Bypass hose
 - Garden Hose Inlet/QC Outlet

- General Pump® Industrial Triplex**
- Thermal Relief Valve
 - Forged Brass Head
 - Heat-Resistant Solid Ceramic Plungers Operating on Lubricated Packings
 - External Unloader with Bypass hose

- COMET Industrial Triplex**
- Thermal Relief Valve
 - Forged Brass Head
 - Heat-Resistant Solid Ceramic Plungers Operating on Lubricated Packings
 - External Unloader with Bypass Hose

- UDOR® Industrial Triplex**
- Forged Brass Head
 - Thermal Relief Valve
 - Heat-Resistant Solid Ceramic Plungers Operating on Lubricated Packings
 - External Unloader with Bypass hose



ENGINES

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	External
CRX® 680	679cc	External
HONDA® GX690	688cc	External
VANGUARD 479cc	479cc	External
VANGUARD® 570cc	570cc	External
KOHLER® KDW1003 Diesel [*]	1028cc	External

DIMENSIONS AND WEIGHT

MB1518012A	L:29" x W:34" x H:40" 277 Lbs
KB4040112	L:42" x W:28" x H:47.5" 375 Lbs
KB4040252	L:42" x W:28" x H:47.5" 375 Lbs
BB4040232E	L:41.75" x W:31.125" x H:45.25", 525 Lbs
BB4040332E	L:41.75" x W:31.125" x H:45.25", 540 Lbs
BB4040342E	L:41.75" x W:31.125" x H:45.25", 565 Lbs
BB4040132E	L:41.75" x W:31.125" x H:45.25", 580 Lbs
SB3555331E	L:41.75" x W:45.25" x H:37.125", 622 Lbs
SB3555251E	L:41.75" x W:45.25" x H:37.125", 685 Lbs
SB3555131E	L:41.7" x W:45.25" x H:37.125", 639 Lbs
SB3555231E	L:41.7" x W:31.125" x H:45.25", 663 Lbs
SBD4060551E	L:48" x W:48" x H:45" 1,050 Lbs

^{*} - Indicates engine is equipped with Low Oil Shutdown Technology

INDUSTRIAL COLD WATER GAS PRESSURE WASHERS

MOBILE TRAILER SERIES (COLD WATER)

SIMPSON®’s mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailer, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.

UNITS INCLUDE

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Gun
- Siphon tube

LIMITED WARRANTY

1yr Frame, 5yr Pump, 3yr Engine



95000



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE	PUMP	TRAILER SIZE	WATER TANK SIZE	HOSE
---------	-------	---------------------	--------	------	--------------	-----------------	------

STAGE 1A COLD WATER

TRSA-3228262	95000 ²	3200 PSI 2.8 GPM	*HONDA® GX200	CAT PUMPS® Industrial Triplex	7' Overall (4' x 4' Platform)	100 Gal	3/8" x 50' x QC, Monster
TRSA-3228162	95129 ²	3200 PSI 2.8 GPM	*CRX® 210	CAT PUMPS® Industrial Triplex	7' Overall (4' x 4' Platform)	100 Gal	3/8" x 50' x QC, Monster

STAGE 1B COLD WATER

TRSB-3835262	95001 ¹	3800 PSI 3.5 GPM	*HONDA® GX270	CAT PUMPS® Industrial Triplex	9' Overall (4' x 5'6" Platform)	150 Gal	3/8" x 100' x QC, Monster
TRSB-3835162	95133 ²	3800 PSI 3.5 GPM	*CRX® 275	CAT PUMPS® Industrial Triplex	9' Overall (4' x 5'6" Platform)	150 Gal	3/8" x 100' x QC, Monster
TRSB-4240262	95002 ¹	4200 PSI 4.0 GPM	*HONDA® GX390	CAT PUMPS® Industrial Triplex	9' Overall (4' x 5'6" Platform)	150 Gal	3/8" x 100' x QC, Monster
TRSB-4240162	95130 ²	4200 PSI 4.0 GPM	*CRX® 420	CAT PUMPS® Industrial Triplex	9' Overall (4' x 5'6" Platform)	150 Gal	3/8" x 100' x QC, Monster
TRSB-4240262E	95003 ^{1,**}	4200 PSI 4.0 GPM	*HONDA® GX390 w/ Recoil & E-Start	CAT PUMPS® Industrial Triplex	9' Overall (4' x 5'6" Platform)	150 Gal	3/8" x 100' x QC, Monster
TRSB-4240162	95134 ^{1,**}	4200 PSI 4.0 GPM	*CRX® 420 w/ Recoil & E-Start	CAT PUMPS® Industrial Triplex	9' Overall (4' x 5'6" Platform)	150 Gal	3/8" x 100' x QC, Monster
TRSB-4240362E	95004 ^{1,**}	4200 PSI 4.0 GPM	*VANGUARD 479cc w/ E-Start	CAT PUMPS® Industrial Triplex	9' Overall (4' x 5'6" Platform)	150 Gal	3/8" x 100' x QC, Monster

¹ - 49 State Compliant
² - 50 State Compliant
* - Indicates engine is equipped with Low Oil Shutdown Technology
** - Battery not included. Recommend 12V Garden tractor battery type U1.

INDUSTRIAL COLD WATER GAS PRESSURE WASHERS

MOBILE TRAILER SERIES (COLD WATER) CONT.



95001



95003



95004

PUMPS

- CAT PUMPS® Industrial Triplex**
- Thermal Relief Valve
 - External unloader with Bypass hose
 - Garden Hose Inlet/QC Outlet

ADDITIONAL SPECS

- TRAILER FRAME**
- Rectangular thick wall steel tubing
- AXLE RATING**
- 2000 lbs
- LIGHTING**
- LED
- TRAILER HITCH BALL SIZE**
- 2" Ball

TIRES

- 5.30"-12"

HOSE

- Steel-braided Monster Hose is a kink and abrasion resistant hose with quick connect fittings and polyurethane outer jacket
- Sizes: 3/8"x 50' and 3/8"x 100'
- Hose Reel: 100'

ENGINES

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210	208cc	1.0 gal
CRX® 275	272cc	1.2 gal
CRX® 420	420cc	2.0 gal
HONDA® GX200	196cc	.83 gal
HONDA® GX270	270cc	1.4 gal
HONDA® GX390	389cc	1.6 gal
VANGUARD 479cc	479cc	Tank not included

NOZZLES

- Quick connect nozzle for use for a variety of cleaning applications

DIMENSIONS AND WEIGHT

95000	L:72" x W:65" x H:52" 750 Lbs
95129	L:72" x W:65" x H:52" 750 Lbs
95001	L:80" x W:52" x H:72" 900 Lbs
95133	L:80" x W:52" x H:72" 900 Lbs
95002	L:80" x W:52" x H:72" 900 Lbs
95130	L:80" x W:52" x H:72" 900 Lbs
95003	L:80" x W:52" x H:72" 900 Lbs
95134	L:80" x W:52" x H:72" 900 Lbs
95004	L:80" x W:52" x H:72" 1,000 Lbs

* - Indicates engine is equipped with Low Oil Shutdown Technology

INDUSTRIAL HOT WATER GAS PRESSURE WASHERS

MOBILE TRAILER SERIES (HOT WATER)

SIMPSON®’s mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailer, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.

UNITS INCLUDE

- Hose
- Lance
- Gun
- Nozzles
- Engine oil 10W-30
- Siphon tube

LIMITED WARRANTY

1yr Frame, 5yr Pump, 3yr Engine



MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE	PUMP	TRAILER SIZE	AXLE RATING	WATER TANK SIZE	TIRE
STAGE 1C HOT WATER		LOW OIL SHUTDOWN						
TRSC-4040232E	95005 ¹	4000 PSI 4.0 GPM	*HONDA® GX390 w/ Recoil & E-Start	COMET Industrial Triplex	9’ Overall (4’ x 5’7” Platform)	3500 lbs	200 Gal	ST175/80R13
TRCS-4040132	95016 ¹	4000 PSI 4.0 GPM	*CRX® 420 w/ E-Start	COMET Industrial Triplex	9’ Overall (4’ x 5’7” Platform)	3500 lbs	200 Gal	ST175/80R13
STAGE 2 HOT WATER		LOW OIL SHUTDOWN						
TRS2-3555251E	95123 ¹	3500 PSI 5.5 GPM	*HONDA® GX690 w/ Recoil & E-Start	General Pump® Industrial Triplex	13’ Overall	3500 lbs	225 Gal	ST205/75R14
TRS2-3555151E	95131 ¹	3500 PSI 5.5 GPM	CRX® 680 w/ Recoil & E-Start	General Pump® Industrial Triplex	13’ Overall	3500 lbs	225 Gal	ST205/75R14
STAGE 3 HOT WATER		LOW OIL SHUTDOWN						
TRS3-3555231E	95122 ¹	3500 PSI 5.5 GPM	*HONDA® GX690 w/ E-Start	COMET Industrial Triplex	13’ Overall	2 X 4500 lbs	525 Gal	ST235/80R16
TRS3-3555231E	95124 ¹	3500 PSI 5.5 GPM	*HONDA® GX690 w/ E-Start	General Pump® Industrial Triplex	13’ Overall	2 X 4500 lbs	525 Gal	ST235/80R16
TRS3-3555131E	95132 ¹	3500 PSI 5.5 GPM	*CRX® 680 w/ E-Start	COMET Industrial Triplex	13’ Overall	2 X 4500 lbs	525 Gal	ST235/80R16
TRS3-3555151E	95138 ¹	3500 PSI 5.5 GPM	CRX® 680 w/ E-Start	General Pump® Industrial Triplex	13’ Overall	2 X 4500 lbs	525 Gal	ST235/80R16
MINI BRUTE TRAILER								FUEL TANK CAPACITY
MBT-4040252E	95014 ¹	4000 PSI 4.0 GPM	*HONDA® GX390 w/ Recoil & E-Start	General Pump® Industrial Triplex	10.75’ Overall (6.25’ x 4’ Platform)	3500 lbs	1.6 gal	12”
MBT-4040152E	95136 ²	4000 PSI 4.0 GPM	*CRX® 420 w/ E-Start	General Pump® Industrial Triplex	10.75’ Overall (6.25’ x 4’ Platform)	3500 lbs	1.6 gal	12”

¹ - 49 State Compliant

² - 50 State Compliant

** - Battery not included. Recommend 12V Garden tractor battery type U1.

INDUSTRIAL HOT WATER GAS PRESSURE WASHERS

MOBILE TRAILER SERIES (HOT WATER) CONT.



SIMPSON WATER TRAILER										LOW OIL SHUTDOWN
MODEL #	PART#	ENGINE	POWER (NET KW)	PUMP	TRAILER SIZE	AXLE RATING	WATER TANK SIZE	FUEL TANK CAPACITY	TIRE	
SWT-525172	95400 ²	*CRX® 210	4.1 kW	2” Semi-trash Pump	10.75’ Overall (6.25’ x 4’ Platform)	9000 lbs	525	.7 gal	16”	
MAX FLOW: 158 GPM MAX HEAD: 98 ft. DIMENSION W/ FILL TUBE: L:148” x W:86.” x H:85” DIMENSION W/O FILL TUBE: L:148” x W:86” x H:77” DRY WEIGHT: 2500 lbs WET WEIGHT: 7000 lbs										
OPTIONAL ACCESSORIES (must choose 80282 or 80283):										
• 80280 - Fire hose reel kit. Includes a heavy duty hose reel, 50 ft of 1” rubber fire hose, a 1” fire hose nozzle, mounting hardware and plumbing										
• 80281 - Left-hand manifold kit • 80282 - 2-5/16” adjustable ball coupling kit • 80283 - 2” adjustable ball coupling kit										

PUMPS

- COMET Industrial Triplex
- Thermal Relief Valve
 - Forged Brass Head
 - Heat-Resistant Solid Ceramic Plungers Operating on Lubricated Packings
 - External Unloader with Bypass Hose
- General Pump® Industrial Triplex
- Thermal Relief Valve
 - Forged Brass Head
 - Heat-Resistant Solid Ceramic Plungers Operating on Lubricated Packings
 - External Unloader with Bypass hose

HOSES

- Armor Hose™
- Hot water hose with quick connect fittings
 - Sizes:
3/8”x 50’ - 95136
3/8”x 100’ - All except 95400 (N/A)
- Supply Hose
- Sizes:
3/8” x 75’ - Stage 1Cs
3/8” x 90” - Stage 2s, 3s, and Mini Brute Trailers
- Supply Hose Reel
- Standard - Stage 1C, 2, 3
Optional - Mini Brute Trailers
N/A - 95400
- High Pressure Hose Reel
- Sizes:
100’ - Stage 1Cs
200’ - Stage 2s, 3s; optional for Mini Brute Trailers
N/A - 95400

ENGINES

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	2.0 gal
CRX® 680	679cc	Tank not included
HONDA® GX390	389cc	Tank not included
HONDA® GX690	688cc	Tank not included
HONDA® IGX700	688cc	Tank not included

NOZZLES

- 5 Quick connect nozzle tips: 0°, 15°, 25°, 40° and soap to use for a variety of cleaning applications

ADDITIONAL SPECS

- Stage 2 & 3 Equipped with 48” Toolbox
- Stage 3 Equipped with 16 galDetergent Tank

TRAILER FRAME

- Rectangular thick wall steel tubing

LIGHTING

- LED

TRAILER HITCH BALL SIZE

- 2” Ball

DIMENSIONS AND WEIGHT

95005	L:80” x W:68” x H:69” 1300 Lbs
95016	L:80” x W:68” x H:69” 1300 Lbs
95123	L:156” x W:68” x H:62” 1500 Lbs
95131	L:156” x W:68” x H:62” 1500 Lbs
95122	L:192” x W:90” x H:62” 3500 Lbs
95132	L:192” x W:90” x H:62” 3500 Lbs
95138	L:192” x W:90” x H:62” 3500 Lbs
95014	L:128” x W:48” x H:39” 900 Lbs
95136	L:128” x W:48” x H:39” 900 Lbs
95400	See above

² - 50 State Compliant

* - Indicates engine is equipped with Low Oil Shutdown Technology

PREMIUM GENERATORS

COMMERCIAL SERIES

Larger, tougher, and capable of producing higher power output than inverter generators, SIMPSON® Commercial generators are perfect for powering job sites and providing back-up electricity during power outages.

LIMITED WARRANTY**

All Units 3yr Residential, 6m Commercial



MODEL #	PART#	STARTING WATTS	RUNNING WATTS*	AC VOLTAGE	AC FREQUENCY	BREAKER AMPERAGE	VOLTAGE REGULATION	TIRE/WHEEL	RUN TIME-25% LOAD	dBA-25% LOAD @ 7M +
SPG3640	70068 ¹	4500	3600	120V	60 Hz	30A	Automatic	N/A	10.5 Hours	72-75
SPG3645	70069 ²	4500	3600	120V	60 Hz	30A	Automatic	8" Never-flat	10.5 Hours	72-75
SPG5568	70070 ²	6875	5500	120/240V	60 Hz	24.1A	Automatic	10" Never-flat	9.5 Hours	74-77
SPG7593E	70072 ²	9375	7500	120/240V	60 Hz	31A	Automatic	10" Never-flat	9 Hours	74-77
SPG8310E	70073 ²	10000	8300	120/240V	60 Hz	34.5A	Automatic	10" Never-flat	9 Hours	74-77

ENGINES

MODEL #	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
SPG3640	CRX® OHV	224cc	Recoil	3.9 gal Gasoline
SPG3645	CRX® OHV	224cc	Recoil	3.9 gal Gasoline
SPG5568	CRX® OHV	420cc	Recoil	6.6 gal Gasoline
SPG7593E	CRX® OHV	420cc	Recoil/E-Start	6.6 gal Gasoline
SPG8310E	CRX® OHV	439cc	Recoil/E-Start	6.6 gal Gasoline

DIMENSIONS AND WEIGHT

SPG3640	L:23" x W:17" x H:17" 95 Lbs
SPG3645	L:23" x W:18" x H:19" 110 Lbs
SPG5568	L:27" x W:21" x H:23" 174 Lbs
SPG7593E	L:27" x W:21" x H:23" 174 Lbs
SPG8310E	L:27" x W:21" x H:23" 207 Lbs

ADDITIONAL SPECS

- ALL UNITS
- Low Oil Shutdown
 - GFCI Protection
- 70070
- Equipped with Safe-T-Sense which assists in reducing the risk of injury or fatality due to accidental carbon monoxide poisoning.
- 70072, 70073
- Battery not included; uses 12V-14AH battery

¹ - 49 State Compliant
² - 50 State Compliant
* - Generator per PGMA (Portable Generator Manufactures' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators
** - See Operator's Manual for complete warranty details.
*** - ANSI/PGMA G300-2018 compliant
+ - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

GENERATOR PANEL CONFIGURATIONS*



PREMIUM GENERATORS

INDUSTRIAL SERIES

Larger, tougher, and capable of producing higher power output than inverter generators, SIMPSON® Industrial generators are perfect for powering job sites and providing back-up electricity during power outages.


HEAVY-DUTY WELDED STEEL FRAME WITH POWDER COATED FINISH
Provides durability and corrosion resistance

WELDED LIFTING HANDLE
For stable maneuvering and easy mobility across a variety of terrains

PREMIUM HONDA® ENGINES
Equipped with low oil shutdown to protect engine and extend product life

LIMITED WARRANTY**

All Units 3yr Commercial

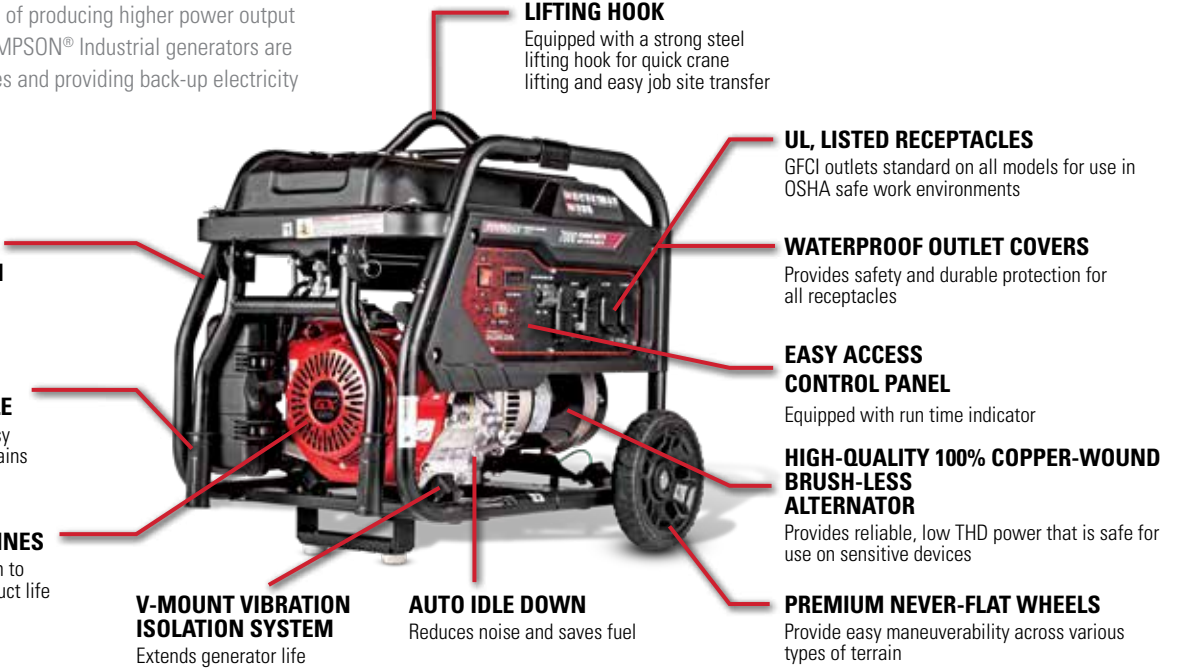

MODEL #	PART#	STARTING WATTS	RUNNING WATTS*	AC VOLTAGE	AC FREQUENCY	BREAKER AMPERAGE	VOLTAGE REGULATION	TIRE/WHEEL	RUN TIME-25% LOAD	dBA-25% LOAD @ 7M +
SCGH5500	70053 ²	5500	4500	120V/240V	60 Hz	17.5A	Capacitor	9" Never-flat	17 Hours	72
SCGH8500	70054 ²	8500	7000	120V/240V	60 Hz	30A	Capacitor	9" Never-flat	12 Hours	74
SCGH8500E	70055 ²	8500	7000	120/240V	60 Hz	30A	Capacitor	9" Never-flat	12 Hours	74

ENGINES

MODEL #	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
SCGH5500	HONDA® GX270	270cc	Recoil	7.9 gal
SCGH8500	HONDA® GX390	389cc	Recoil	7.9 gal
SCGH8500E	HONDA® GX390	389cc	Recoil/E-Start*	7.9 gal


DIMENSIONS AND WEIGHT

SCGH5500	L:30.25" x W:25" x H:27" 51 Lbs
SCGH8500	L:30.25" x W:25" x H:27" 175 Lbs
SCGH8500E	L:30.25" x W:25" x H:27" 182 Lbs

ADDITIONAL SPECS

- ALL UNITS
- Low Oil Shutdown
 - GFCI Protection
 - CSA certified
- 70055
- 12V battery included

SCGH5500



SCGH8500



SCGH8500E



¹ - 49 State Compliant
² - 50 State Compliant
* - Generator per PGMA (Portable Generator Manufactures' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators
** - See Operator's Manual for complete warranty details.
*** - ANSI/PGMA G300-2018 compliant
+ - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

GENERATORS

DEVICE WATTAGES

HEATING & COOLING

DEVICE	STARTING WATTS	RUNNING WATTS
10,000 BTU CENTRAL AC¹	3000	1500
24,000 BTU CENTRAL AC¹	4950	3800
½ HP FURNACE FAN BLOWER¹	2300	875
½ HP FURNACE FAN BLOWER¹	1400	700
HEAT PUMP	4500	4700
13 GAL HUMIDIFIER	-	175
SPACE HEATER	-	-
10,000 BTU WINDOW AC	1800	1800
12,000 BTU WINDOW AC	3950	3250

LANDSCAPING

DEVICE	STARTING WATTS	RUNNING WATTS
ELECTRIC HEDGE TRIMMER	-	400
ELECTRIC LAWN MOWER	-	1200
9" ELECTRIC LINE TRIMMER	-	350-500
½ HP 12" ELEC. CHAIN SAW	-	900-1220

WORK SITE

DEVICE	STARTING WATTS	RUNNING WATTS
ELECTRIC HEDGE TRIMMER	-	400
ELECTRIC LAWN MOWER	-	1200
9" ELECTRIC LINE TRIMMER	-	350-500
1 HP AIR COMPRESSOR	4500	2000
½ HP AIR COMPRESSOR	2000	1400
⅓ HP AIRLESS PAINT SPRAYER	1200	600
3" BELT SANDER	2400	1200
8" SANDER	1100	1400
6 ½" CIRCULAR SAW	2300	800-1000
½" HAND DRILL	900	600
¾" HAND DRILL	600	400
10" MITER SAW/ TABLE SAW	2100	850
QUARTZ HALOGEN WORK LAMP	-	1000
RECIPROCATING SAW	-	960

RECREATIONAL

DEVICE	STARTING WATTS	RUNNING WATTS
AM / FM RADIO	-	100
BLENDER	450	400
20" BOX FAN	-	200
CD/ DVD PLAYER	-	100
CELLPHONE BATTERY CHARGER	-	25
COLOR TV	-	200-500
ELECTRIC GRILL	-	1650
INFLATER PUMP	150	50
OUTDOOR LIGHT STRING	-	250
13,500 BTU RV AC	700	1500
SLOW COOKER	-	250

RESIDENTIAL

DEVICE	STARTING WATTS	RUNNING WATTS
COFFEE MAKER	-	1750
ELECTRIC DRYER	1800	5750
ELECTRIC RANGE	-	1500 / ELEMENT
ELECTRIC WATER HEATER	1000	2000
½ HP GARAGE DOOR OPENER	2350	500-875
1250 WATT HAIR DRYER	-	1250
100 WATT LIGHT BULB	-	100
1000 WATT MICROWAVE	-	700
REFRIGERATOR/ FREEZER	2200	500
SECURITY SYSTEM	-	800-1050
½ HP SUMP PUMP	2150	800
½ HP SUMP PUMP	1300-	200-500
TELEVISION	-	1200-1650
TOASTER	-	1150
WASHING MACHINE	2300	1000
½ HP WELL PUMP	2100	3250
⅓ HP WELL PUMP	1400	750

¹Wattages listed are approximated, always check appliances for actual figures.

INVERTER GENERATOR & PARALLEL BOX ACCESSORY

INVERTER SERIES

Designed to be smaller, lighter, quieter, and provide a more stable power supply than a conventional generator, our inverter generators is the perfect way to power a tailgate party, or run sensitive electronic devices like TVs and computers while camping.

UNIT INCLUDES

- RV Plug (70059 & 70063)

LIMITED WARRANTY

SIG2218	3yr Consumer, 1yr Commercial
SIG4540E	3yr Consumer, 1yr Commercial
SIG22PK	90 days



NOW WITH GFCI PROTECTION!

SIG2218



MODEL #	PART#	STARTING WATTS	RUNNING WATTS	AC VOLT-AGE	AC FREQUENCY	BREAKER AMPERAGE	RUN TIME-25% LOAD	dBA-25% LOAD @ 7M+	OUTLET TYPE
SIG2218²	70061	2200	1800	120V	60 Hz	15A MAX	10 Hour	53	120V Duplex (5-20R) GFCI, 12V DC Automotive
SIG4540E²	70063	4500	4000	120V	60 Hz	36 inch	9 Hour	69	120V (TT-30R) RV Outlet, 120V Duplex (5-20R) GFCI, 12V DC Automotive

ENGINES

INVERTER MODEL	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
SIG2218	CRX®	79cc	Recoil	1.1 gal Gasoline
SIG4540E	CRX®	223cc	Recoil/ Electric	2.3 gal Gasoline

DIMENSIONS AND WEIGHT

SIG2218	L:20" x W:12" x H:18" 46 Lbs
SIG4540E	L:24" x W:17.5" x H:19" 110 Lbs

PARALLEL BOX ACCESSORY

For use with SIG2218 only

MODEL #	PART#	AMPS
SIG22PK	80442	30A

The SIG22PK parallel box includes two sets of power leads and grounding wires for easy connection between two inverter generators rated up to 3300 running watts. **Inverter generators and parallel box sold separately.**



Advanced Carbon Monoxide Detection & Engine Shut Down System

Safe-T-Sense assists in reducing the risk of injury or fatality due to accidental carbon monoxide poisoning. Safe-T-Sense is designed to help ensure that everyone who operates a Simpson generator equipped with Safe-T-Sense carbon monoxide detection and engine shut down system can do so with confidence, providing added peace-of-mind protection.

How Does Safe-T-Sense work?

The Safe-T-Sense system continuously measures CO levels near the generator. The Safe-T-Sense system will automatically shut down the generator before carbon monoxide levels near the generator reach a dangerous level.

Safe-T-Sense uses a very robust, fast reacting, long lasting sensor to determine CO levels. Warning lights on the face plate indicate if an instance of high CO levels shut down the generator.

ANSI/PGMA G300-2018

As a leading manufacturer of portable generators and related products, Simpson has been supportive in the safety standards adopted by ANSI/PGMA G300-2018. To learn more about our products, visit www.simpsoncleaning.com for more information.

¹ - 49 State Compliant

² - 50 State Compliant

* - Generator per PGMA (Portable Generator Manufactures' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators

** - See Operator's Manual for complete warranty details.

*** - ANSI/PGMA G300-2018 compliant

+ - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

PREMIUM PORTABLE TRASH PUMPS

TRASH PUMPS SERIES

Engineered to handle water containing mud,sand, leaves, twigs, and other contaminants,SIMPSON's trash water pumps are perfect for clearing floodwater and wastewater from residential, municipal, and industrial sites. Easy to transport, use, and clean, SIMPSON's trash water pumps will get the job done no matter where you need them.

UNIT INCLUDES

SSTP71006(S) SSTP71007(-S)	2" Plastic Strainer, 1x Wire Clamp
SCP71009(-S)	Hose Barb (x1 Straight - x1 90°),
STP71010(-S)	3" Plastic Strainer, 1x Wire Clamp

LIMITED WARRANTY

SSTP71007(-S)	3yr
SCP71009(-S)	3yr
STP71010(-S)	3yr

MODEL #	PART#	PUMP	ENGINE	START	FLOW RATE	INLET/OUTLET DIAMETER	FUEL TANK CAPACITY	SUCTION HEAD LIFT	TOTAL HEAD LIFT
SSTP71016-S ²	71016S	2" Semi-Trash	HONDA® GS190	Recoil Start	158 GPM	2"	0.25 gal	25'	98'
SSTP71007(-S) ²	71007(71007S)	2" Semi-Trash	*CRX® 210	Recoil Start	158 GPM	2"	0.7 gal	25'	98'
SCP71009(-S) ²	71009 (71009S)	2" Chemical Trash	*CRX® 210	Recoil Start	195 GPM	2"	0.7 gal	25'	98'
STP71010(-S) ²	71010 (71010S)	3" Trash	*CRX® 210	Recoil Start	285 GPM	3"	0.7 gal	25'	85'

PUMP

SSTP71016-S SSTP71007(-S)	<ul style="list-style-type: none">• Pump Housing Material: Die Cast Aluminum• Quick Clean Out Easy Access: Yes• Pump Color: Aluminum• Pump Drain: Yes• Mechanical Seal Material: Silicon Carbide• Impeller Material
SCP71009(-S)	<ul style="list-style-type: none">• Pump Housing Material: Fiber Reinforced Polymer• Quick Clean Out Easy Access: Yes• Pump Color: Black• Pump Drain: Yes• Mechanical Seal Material: Ceramic Carbide• Impeller Material: Plastic
STP71010(-S)	<ul style="list-style-type: none">• Pump Housing Material: Die Cast Aluminum• Quick Clean Out Easy Access: Yes• Pump Color: Aluminum• Pump Drain: Yes• Mechanical Seal Material: Silicon Carbide• Impeller Material: Cast Iron

FRAME

- 1.25" Silver Steel frame construction with a powder-coated finish for durability and corrosion resistance SSTP71007(-S) & STP71010(-S)

PORTABLE



71007



ENGINE

ENGINE	DISPLACEMNET	FUEL TANK CAPACITY
CRX® 210	208cc	0.7 gallon
HONDA® GS190	186cc	0.25 gallon

PORTABLE
Handle not shown



71009

DIMENSIONS AND WEIGHT

SSTP71016-S SSTP71007(-S)	L:20" x W:17.2" x H:19.4" 65 Lbs
SCP71009(-S)	L:19.1" x W:16.1" x H:15.5" 43 Lbs
STP71010(-S)	L:22.8" x W:20" x H:21.2" 79 Lbs

PORTABLE



71010

¹ 49 State Compliant
² 50 State Compliant
(-S) - Indicates shippable packaging.
*LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 45 for details.

PREMIUM ACCESSORIES

HIGH-PERFORMANCE HOSES



MAX TEMP: 140° F
INNER MATERIAL: Polyester
OUTER MATERIAL: Polyurethane w/ 4" Bend Protectors

FITTINGS: M22 x M22
TERMINATED: N/A

MORFLEX® HOSE SERIES

Designed to be highly flexible and kink resistant. Our MorFlex® series hose has a polyurethane outer jacket that is non-marring and abrasion resistant for improved durability, and includes 4-inch bend protectors on each end of the hose to help extend the life of the hose. MorFlex® is a cold water hose that is equipped with industry standard M22 threaded connections with a dual o-ring design to fit most gas and electric pressure washers up to 3700 PSI.



MAX TEMP: 140° F
INNER MATERIAL: Polyester & Steel-braided
OUTER MATERIAL: Polyurethane w/ 4" Bend Protectors
FITTINGS: Brass QC Socket x Steel QC Plug

TERMINATED:
41113, 41030 - Steel Solid MNPT x Steel Solid MNPT
41028 (41071) - Brass Solid QC Socket x Steel Solid QC Plug

MONSTER HOSE SERIES

Designed for cold water temperature applications up to 140°F. The dual-braided construction of steel over polyester provides strength and durability; the translucent polyurethane outer jacket is flexible, non-marring and up to three times more abrasion resistant than rubber. This cold water hose is built to withstand up to 4500 PSI, which means this hose is fit for most commercial and residential pressure washers with 3/8" quick connect fittings.



MAX TEMP: 250° F
INNER MATERIAL: Polyester & Steel-braided
OUTER MATERIAL: Polyurethane w/ 4" Bend Protectors

FITTINGS: Brass QC Socket x Steel QC Plug
TERMINATED: Steel Solid MNPT x Steel Solid MNPT

ARMOR® HOSE SERIES

Built for high-temperature applications up to 250°F. The dual-braided construction of steel over polyester provides strength and durability; the opaque polyurethane outer jacket is flexible, non-marring and abrasion resistant. Armor Hose is hot and cold water compatible and designed to fit most commercial gas pressure washers with 3/8" quick connect fittings and up to 4500 PSI.



MAX TEMP: 250° F
INNER MATERIAL: R1 Steel-braided; R2 Steel-braided
OUTER MATERIAL:
41183 - Wrapped Rubber w/ 6" Bend Protectors
All Others - Wrapped Rubber w/ 24" Bend Protectors

FITTINGS:
41183 - Brass QC Socket x Steel QC Plug
All Others - SS QC Socket x SS QC Plug
TERMINATED: Steel 3/8" Rigid MNPT
x Steel 3/8" Swivel MNPT

WRAPPED RUBBER HOSE SERIES

Designed for industrial and commercial use. Heavy-duty construction and durability make it perfect for the toughest jobs and environments. This hose series offers single-braided or dual-braided technology with a wrapped rubber outer jacket and bend protectors to help extend the life of the hose. Our wrapped rubber hose is rated for temperatures up to 250°F and pressure ratings from 4,500 to 10,000 PSI and is compatible with pressure washers equipped with 3/8" quick connect fittings.



LIMITED WARRANTY

ALL HOSES	90 Day Accessory
-----------	------------------



- Also available for Delco® pressure washers

M22 ADAPTER INCLUDED
WITH MORFLEX® HOSES
Used to connect multiple hoses with standard M22 connections



PART#	MAX PRESSURE	ID x LENGTH
-------	--------------	-------------

40224 (41107)*	3300 PSI	1/4" x 25'
40225 (41108)*	3700 PSI	1/4" x 25'
40226 (41109)*	3700 PSI	1/4" x 50'

PART#	MAX PRESSURE	ID x LENGTH
-------	--------------	-------------

41113	4500 PSI	3/8" x 25'
41028 (41071)*	4500 PSI	3/8" x 50'
41030	4500 PSI	3/8" x 100'
41032	4500 PSI	3/8" x 150'
41034	4500 PSI	3/8" x 200'

PART#	MAX PRESSURE	ID x LENGTH
-------	--------------	-------------

41114 (41095)*	4500 PSI	3/8" x 50'
41096	4500 PSI	3/8" x 100'
41115	4500 PSI	3/8" x 200'

PART#	MAX PRESSURE	ID x LENGTH
-------	--------------	-------------

41183	4500 PSI	3/8" x 50'
41184	8000 PSI	3/8" x 50'
41185	8000 PSI	3/8" x 100'
41186	8000 PSI	3/8" x 200'
41187	10,000 PSI	3/8" x 50'
41188	10,000 PSI	3/8" x 100'
41189	10,000 PSI	3/8" x 200'
41190	10,000 PSI	1/2" x 50'
41191	10,000 PSI	1/2" x 100'
41192	10,000 PSI	1/2" x 200'

* - (Hoses shipped in retail packaging)

PROFESSIONAL GRADE CLEANING / PREMIUM ACCESSORIES

VITAL OXIDE

Vital Oxide is an EPA-registered hospital disinfectant cleaner, mold killer and super effective odor eliminator. Ready to use with no mixing required, just spray, wipe or fog right from the bottle. Non-irritating to the skin and non-corrosive to treated articles.

VITAL OXIDE IN ACTION:

- Used in emergency response to eliminate Norovirus outbreaks
- Clinical trials have shown a decrease of 95% in Healthcare Associated Infections (HAI'S) of Acinetobacter spp in hospital environment
- Used in disaster response to eliminate mold and mildew from flood damage
- University and government sponsored studies document long-term effectiveness on mold and mold spores, even eliminating mold spores

PART #	CONTENTS AMOUNT
82245	5 GALLON PAIL
82246*	15 GALLON DRUM
82247*	55 GALLON DRUM
82248*	261 GALLON TOTE

* - Shipping times vary due to availability.
Contact your sales rep for more information



CLEANING DETERGENT

SIMPSON® pressure washer cleaners are specifically formulated to enhance your pressure washer's performance. Featuring different formulas, multi-purpose, heavy-duty, and biodegradable, SIMPSON® cleaners will help cut through tough grease, power away stains, and easily remove mold and mildew on the job-site and at home.

FOR USE ON MULTIPLE SURFACES:

- Industrial Sites & Exterior Surfaces
 - Tough stains on Brick, Siding & Concrete
 - Commercial Equipment & Vehicle Fleet
- Grease & Grime
 - Deck, Fence & Patio
 - Cars, Trucks, Bikes & RVs
 - Outdoor Furniture

PART #	USE	CONTENTS AMOUNT
88290 (88282)	Heavy-Duty	1 Gallon
88289 (88281)	Multi-Purpose	1 Gallon
88291 (88283)	Natural Green Formula	1 Gallon



Green Formula is non-toxic & biodegradable, contains no harsh chemicals

PREMIUM ACCESSORIES

SPRAY GUNS & WANDS

ACCESSORY	PART #	MAX PRESSURE	MAX GPM	MAX TEMP	INLET CONNECTION	OUTLET CONNECTION	Deila AVAIL.
Front Load Spray Gun	80147	3400 PSI	8.0 GPM	140° F	M22 Male Hose Connect	M22 Female Hose Connect	
360° Swivel Side Assist Spray Gun	80148	4500 PSI	6.6 GPM	140° F	M22 Male Hose Connect with included Female M22 x QC Plug adapter	M22 Female Hose Connect	
Hot Water Spray Gun	80178	5075 PSI	12.0 GPM	212° F	3/8" FNPT Hose Connect with included 3/8" MNPT x M22 Male and 3/8" MNPT x QC Plug adapters	1/4" FNPT Hose Connect	✓
16" Spray Wand	80149	3600 PSI	N/A	140° F	M22 Male Spray Gun Connect	1/4" QC Socket Nozzle Connect	
31" Spray Wand	80479	4500 PSI	N/A	140° F	M22 Male Spray Gun Connect	1/4" QC Socket Nozzle Connect	
48" Insulated Wand	80179	5075 PSI	N/A	212° F	1/4" MNPT Spray Gun Connect	1/4" QC Socket Nozzle Connect	✓
18' Telescoping Wand	80470	4000 PSI	N/A	140° F	3/8" QC Plug Spray Gun Connect	1/4" QC Socket Nozzle Connect	



PREMIUM ACCESSORIES

PREMIUM ACCESSORIES CONT.



DIAL-N-WASH®

PART #: 82232
MAX PRESSURE: 4500 PSI
MAX GPM: 4.0 GPM
MAX TEMP: 140° F
INLET - SPRAY GUN CONNECT: M22 Male
OUTLET - LANCE CONNECT: M22 Female



O-RING & FILTER KIT

PART #: 80151
TWO FILTERS: One Size
TWO O-RING SETS: Five Sizes

FOAM CANNON

PART #: 80271
MAX PRESSURE: 4000 PSI
MAX TEMP: 140° F
LANCE CONNECT: 1/4" QC Plug



NOZZLES

ACCESSORY	PART #	MAX PRESSURE	MAX TEMP	NOZZLE SIZE	LANCE CONNECT	Deila AVAIL.
Set Of 5 Spray Nozzles: 0°, 15°, 25°, 40° and Soap	80145	3600 PSI	212° F	3.0, Soap	1/4" QC Plug	✓
Set Of 5 Spray Nozzles: 0°, 15°, 25°, 40° and Soap	80146	4500 PSI	212° F	4.0, Soap	1/4" QC Plug	✓
Set Of 2nd Story Nozzles: Wash and Soap	80177	5000 PSI	212° F	10.0, 40.0	1/4" QC Plug	✓
5-N-1 Spray Nozzle: 0°, 15°, 25°, 40° and Soap	80142	3600 PSI	140° F	2.8-3.2, Soap	1/4" QC Plug	
Turbo Nozzle	80143	3600 PSI	212° F	3.0	1/4" QC Plug	✓
Turbo Nozzle	80144	4500 PSI	212° F	4.0	1/4" QC Plug	✓



PUMP CARE

ACCESSORY	PART #	CONTENT AMOUNT
15w40 Pump Oil	80138	16oz
Pump Guard - Aerosol	80273	4oz

HOSE REELS

- All units made of heavy-duty steel construction
- 80490 does not have hose reel guide

PART #	MAX PRESSURE	MAX TEMP	HOSE CAPACITY	Deila AVAIL.
80399	5000 PSI	212° F	100' x 3/8"	✓
80490	5000 PSI	212° F	100' x 3/8" or 125' x 1/4"	
80403	5000 PSI	212° F	200' x 3/8"	✓
80401	5000 PSI	212° F	100' x 3/8" or 125' x 1/4"	

PORTABLE



SURFACE CLEANERS

ACCESSORY	PART #	MAX PRESSURE	MAX TEMP	CONNECTION	MATERIAL	FILTER	Deila AVAIL.
15" Steel Surface Cleaner	80165	3700 PSI	140° F	1/4" QC Plug Lance Connect	Powder Coated Steel Construction	N/A	
20" Commercial Surface Cleaner w/ Handle	80182	4500 PSI	212° F	3/8" QC Plug Inlet Hose Connect	Heavy-duty ABS	High Pressure Inlet	✓




CRX® PROFESSIONAL ENGINES

SINGLE CYLINDER ENGINES

Packed with premium features and professional specifications, our CRX® line of single-cylinder and v-twin engines are guaranteed to out-perform the competition. CRX® professional engines are designed to meet and exceed the rigorous demands of every job site. These engines feature innovative technology to enhance performance, extend the life of your product and increase productivity.



ALL UNITS (SINGLE CYLINDERS AND V-TWINS):

PTO SHAFT ROTATION: Counterclockwise
IGNITION SYSTEM: Transistor Magneto
ADJUSTABLE THROTTLE: Yes
LOW OIL SHUTDOWN: Standard 

CARBURETOR: Naturally Aspirated
GOVERNOR SYSTEM: Mechanical
EVAPORATIVE EMISSIONS: Yes

LIMITED WARRANTY

ALL UNITS 3yr Commercial



ENGINE NAME	CRX® 165	CRX® 210	CRX® 225	CRX® 275	CRX® 340	CRX® 420	
RETAIL PART #	2412101	2422101	2432101	2444101	2456101	2466101	2466502
SHIPPABLE PART #	2412101S	2422101S	2432101S	2444101S	2456101S	2466101S	2466502S
OEM PART NUMBER	2412101P	2422101P	2432101P	2444101P	2456101P	2466101P	2466502P
BORE x STROKE	2.68" x 1.77" (68 x 45mm)	2.76" x 2.13" (70 x 54mm)	2.83" X 2.17" (72 x 55mm)	2.95" X 2.42" (75 x 61.5mm)	3.23" x 2.52" (82 x 64mm)	3.54" x 2.60" (90 x 66mm)	
DISPLACEMENT	9.9 cu in (163cc)	12.7 cu in (208cc)	13.7 cu in (224cc)	16.6 cu in (272cc)	20.63 cu in (338cc)	25.63 cu in (420cc)	
COMPRESSION RATIO	8.3:1	8.6:1	9.3:1	8.6:1	8.4:1	8.3:1	
NET POWER	3.4 kW @ 3600 rpm	4.1 kW @ 3600 rpm	4.5 Kw @ 3600 rpm	5.8 Kw @ 3600 rpm	7.2 kW @ 3600 rpm	9.0 kW @ 3600 rpm	
NET TORQUE	8.9 Nm @ 2800 rpm	12.3 Nm @ 2800 rpm	12.3 Nm @ 2800 rpm	15.5 Nm @ 2800 rpm	21 Nm @ 2800 rpm	27 Nm @ 2800 rpm	
ALTERNATOR OUTPUT	N/A	N/A	N/A	N/A	N/A	N/A	
STARTING SYSTEM	Recoil	Recoil	Recoil	Recoil	Recoil	Recoil	E-Start and Key Start
RECOIL COLOR	Red	Red	Black	Black	Black	Black	
LUBRICATION SYSTEM	Splash	Splash	Splash	Splash	Splash	Splash	
AIR CLEANER	Dual Element	Dual Element	Dual Element	Dual Element	Dual Element	Dual Element	
OIL CAPACITY	0.16 gal	0.16 gal	0.16 gal	0.21 gal	0.29 gal	0.29 gal	
FUEL TANK SIZE	1.0 gal	1.0 gal	1.0 gal	1.2 gal	1.6 gal	2.0 gal	
EXHAUST EMISSIONS	50 State	50 State	50 State	50 State	50 State	50 State	
PTO DIMENSIONS	3/4" (19.05 mm)	3/4" (19.05 mm)	3/4" (19.05 mm)	1" (25.4 mm)	1" (25.4 mm)	1" (25.4 mm)	
PTO FLANGE	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange B	SAE J609 Flange B	
ENGINE DRY WEIGHT	34 lbs	33 lbs	33 lbs	41 lbs	69 lbs	67 lbs	
ENGINE DRY DIMENSION (IN)	L:14.25" W:12.75" H:13.75"	L:14.25" W:12.75" H:13.75"	L:14.25" W:12.75" H:13.75"	L:15" W:14" H:14.75"	L:18.90" W: 16.73" H: 19.88"	L:17.25" x W:16" x H:17.9"	

CRX® PROFESSIONAL ENGINES

V-TWIN ENGINES



ENGINE NAME	CRX® 680	CRX® 750	CRX® 1000	CRX® 1000
RETAIL PART #	2678501	2688501	2698501	2699501
SHIPPABLE PART #	N/A	N/A	N/A	N/A
OEM PART NUMBER	2678501P	2688501P	2698501P	2699501P
BORE x STROKE	3.07" x 1.77" (65 x 45 mm)	3.23" x 2.8" (82 x 71 mm)	3.54" x 3.09" (90 x 78.5 mm)	3.54" x 3.09" (90 x 78.5 mm)
DISPLACEMENT	41.4 cu in (679cc)	45.8 cu in (750cc)	60.9 cu in (999cc)	60.9 cu in (999cc)
COMPRESSION RATIO	8.5:1	8.5:1	9.0:1	9.0:1
NET POWER	14.5 Kw @ 3600 rpm	16.0 Kw @ 3600 rpm	24.0 Kw @ 3600 rpm	24.0 Kw @ 3600 rpm
NET TORQUE	42 Nm	47 Nm	71 Nm	71 Nm
ALTERNATOR OUTPUT	12V20A240W	12V20A240W	12V20A240W	12V20A240W
STARTING SYSTEM	E-Start	E-Start	E-Start	E-Start
RECOIL COLOR	Black	Black	Black	Black
LUBRICATION SYSTEM	Pressurized & Splash	Pressurized & Splash	Pressurized & Splash	Pressurized & Splash
AIR CLEANER	Single Element	Single Element	Cyclonic	Cyclonic
OIL CAPACITY	0.37 gal	0.40 gal	0.66 gal	0.66 gal
FUEL TANK SIZE	Tank not included	Tank not included	Tank not included	Tank not included
EXHAUST EMISSIONS	50 State	50 State	49 State	49 State
PTO DIMENSIONS	1 1/8" (28.57 mm)	1 1/8" (28.57 mm)	1 1/8" (28.57 mm)	1 7/16" (36.5 mm)
PTO FLANGE	Sae J609 Flange B	Sae J609 Flange B	Sae J609 Flange B	Sae J609 Flange B
ENGINE DRY WEIGHT	109 lbs	109 lbs	135 lbs	135 lbs
ENGINE DRY DIMENSION (IN)	L:20" x W:20" x H:19"	L:20" x W:21" x H:18.5"	L:22.5" x W:19.5" x H:20.5"	L:22.5" x W:19.5" x H:20.5"

LOW OIL SHUTDOWN

The Low Oil Shutdown (LOS) feature helps to prevent engine damage due to a low oil condition. LOS is an oil level sensor inside the engine crankcase. When the engine oil reaches a level that is too low for proper operation, the LOS will automatically stop the engine, indicating the oil needs to be refilled.

PREMIUM PUMPS

OEM TECHNOLOGIES™ AXIAL CAM PUMP KITS

SIMPSON® offers OEM Technologies™ Axial Cam Pumps and AAA® Industrial Triplex Pumps. Made to provide a long service life, both OEM and AAA pumps contain premium seals, high-strength bearings, and corrosion-resistant materials. With many models featuring technologies such as Easy Start and PowerBoost® make OEM and AAA pumps powerful and easy to use.



INCLUDES

- Pump
- Crankshaft key
- Mounting hardware (nuts & bolts)
- Instruction booklet
- Chemical siphon hose w/ filter

LIMITED WARRANTY

90025, 90026, 90027	1yr
90028 & 90029	2yr



OEM TECHNOLOGIES™ AXIAL CAM PUMPS (VERTICAL)

PART NUMBER	MAX PRESSURE	MAX GPM	MANIFOLD	UNLOADER	SHAFT SIZE	THREADING
90025	2400 PSI	2.0 GPM	Clear Anodized Aluminum Manifold	Integrated w/ Easy Start Unloader	7/8" Shaft	Garden Hose Inlet/M22 Outlet
90026	3100 PSI	2.4 GPM	Clear Anodized Aluminum Manifold	Integrated w/ Easy Start Unloader	7/8" Shaft	Garden Hose Inlet/M22 Outlet
90027	3300 PSI	2.4 GPM	Brass Manifold	Integrated w/ Easy Start Unloader	7/8" Shaft	Garden Hose Inlet/M22 Outlet



PART NUMBER	MAX PRESSURE	MAX GPM	MANIFOLD	UNLOADER	SHAFT SIZE	THREADING
90028	3300 PSI	2.4 GPM	Clear Anodized Aluminum Manifold	Integrated w/ Easy Start Unloader	3/4" Shaft	Garden Hose Inlet/M22 Outlet
90029	3400 PSI	2.5 GPM	Brass Manifold	Integrated w/ Easy Start Unloader	3/4" Shaft	Garden Hose Inlet/M22 Outlet



THERMAL RELIEF VALVE (TRV)

PART #: 80290
RATED TEMP: 140° F
THREAD CONNECT: 1/4" MNPT



With PowerBoost® technology, high water pressure levels trigger a bypass around the venturi nozzle, where chemical suction takes place, reducing pressure loss. Pumps with PowerBoost deliver higher pressure at the nozzle for improved impact and cleaning performance.

- ✓ HIGHER PRESSURE AT THE NOZZLE
- ✓ GREATER IMPACT AND CLEANING PERFORMANCE



PREMIUM PUMPS

AAA® TRIPLEX PUMP AND UNLOADER KITS




SIMPSON® offers OEM Technologies™ Axial Cam Pumps and AAA® Industrial Triplex Pumps. Made to provide a long service life, both OEM and AAA pumps contain premium seals, high-strength bearings, and corrosion-resistant materials. With many models featuring technologies such as Easy Start and PowerBoost® make OEM and AAA pumps powerful and easy to use.

INCLUDES

- Pump
- Crankshaft key
- Mounting hardware (nuts & bolts)
- Instruction booklet
- Chemical siphon hose w/ filter

LIMITED WARRANTY

90052	3yr
90038, 90039, 90034 90036, 90037, 90058, 90057, 90056	5yr
80361, 80404, 80405	90 days

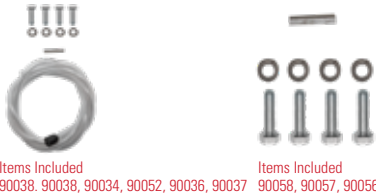

AAA® PUMP KITS

PART NUMBER	MAX PRESSURE	MAX GPM	MANIFOLD	UNLOADER	SHAFT SIZE	THREADING
90038	3800 PSI	3.5 GPM	Brass Manifold	Integrated & Adjustable w/ Easy Start Unloader	1" Shaft	Garden Hose Inlet/QC Outlet
90039	4000 PSI	3.5 GPM	Brass Manifold	Integrated & Adjustable w/ Easy Start Unloader	1" Shaft	Garden Hose Inlet/QC Outlet
90034	4400 PSI	4.0 GPM	Brass Manifold	Integrated & Adjustable w/ Easy Start Unloader	1" Shaft	Garden Hose Inlet/QC Outlet
90052 AX300 PRO AXIAL CAM	3500 PSI	2.5 GPM	Brass Manifold	Integrated & Adjustable w/ Easy Start Unloader	3/4" Shaft	Garden Hose Inlet/M22 Outlet
90036	3200 PSI	2.8 GPM	Brass Manifold	Integrated & Adjustable w/ Easy Start Unloader	3/4" Shaft	Garden Hose Inlet/M22 Outlet
90037	3700 PSI	2.5 GPM	Brass Manifold	Integrated & Adjustable w/ Easy Start Unloader	3/4" Shaft	Garden Hose Inlet/M22 Outlet
90058	3000 PSI	3.0 GPM	Brass Manifold	External Unloader with Bypass Hose	3/4" Shaft	Garden Hose Inlet/QC Outlet
90057	3500 PSI	4.0 GPM	Brass Manifold	External Unloader with Bypass Hose	3/4" Shaft	Garden Hose Inlet/QC Outlet
90058	3000 PSI	4.0 GPM	Brass Manifold	External Unloader with Bypass Hose	3/4" Shaft	Garden Hose Inlet/QC Outlet

AAA® PUMP UNLOADERS

PART NUMBER	MAX PRESSURE	MAX GPM	MATERIAL	THREADING	MAX TEMPERATURE
80361	4500 PSI	12 GPM	Brass Manifold	3/8" FNPT Inlet/Outlet	212° F
80404	5500 PSI	12 GPM	Brass Manifold	3/8" FNPT Inlet/Outlet	212° F
80405	6500 PSI	12 GPM	Stainless Steel Construction	3/8" FNPT Inlet/Outlet	212° F

INDUSTRIAL HOT WATER PRESSURE WASHERS

PATRIOT SERIES

With the ability to be portable or stationary, the Patriot is engineered to provide a high quality clean for your needs. This unit features an adjustable thermostat for precision temperature control and a reliable 3400W generator.

UNITS INCLUDE

- Hose
 - Lance
 - Gun
- Nozzles
 - Engine oil 10W-30

LIMITED WARRANTY

10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- V-Twin horizontal engine with electric start
- NEMA 4X electrical enclosure with burner on/off rocker switch, thermostat control and hour meter
- Corrosion resistant stainless steel coil cover
- Isolated pump & engine plate with vibration dampeners
- 3.4 kw Generator with two 120v outlets
- 120V Burner system
- 1/2" Schedule 80 coil



65013



MODEL #	PART #	ENGINE	PUMP	DRIVE	PSI	GPM	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DPT3080331E	65011 ¹	*VANGUARD® 23 hp w/ E-Start	COMET	Belt	3000	8.0	15 gal	15 gal	855 lbs
DPT3080131E	65146 ¹	*CRX®680 w/ E-Start	COMET	Belt	3000	8.0	15 gal	15 gal	855 lbs
DPT3080251E	65013 ¹	*HONDA® GX690 w/ E-Start	GENERAL PUMP®	Belt	3000	8.0	15 gal	15 gal	896 lbs
DPT3080151E	65148 ¹	*CRX®680 w/ E-Start	GENERAL PUMP®	Belt	3000	8.0	15 gal	15 gal	896 lbs

PUMP

- Premium industrial triplex pumps; COMET or GENERAL PUMP®
- Belt drive configuration
- Axialign™ adjustment system allows for easy belt adjustment and maintenance to be accomplished with a single bolt adjustment
- Oversized by pass hose

FRAME

- Heavy-duty 1½ round tubular steel design
- Powder coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options

HOSES

- 3/8" x 50' Steel-braided Armor Hose™

ENGINE

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 680	679cc	External
HONDA® GX690	688cc	External
VANGUARD® 23 hp	627cc	External

DIMENSIONS

L: 42" x W: 45" x H: 40"

¹49 State Compliant

²50 State Compliant

^{*}LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 45 for details.

INDUSTRIAL HOT WATER PRESSURE WASHERS

COBALT SERIES

The Cobalt series is equipped with a high-performance pressure washing system driven by a twin-cylinder engine, featuring an adjustable thermostat for precision temperature control. The heating of the pressurized water is done effectively with a diesel-fired heating system.

UNITS INCLUDE

- Hose
 - Lance
 - Gun
 - Nozzles
- Engine oil 10W-30
 - Down stream injector

LIMITED WARRANTY

10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- V-Twin horizontal engine with electric start
- NEMA 4X electrical enclosure with burner on/off rocker switch, thermostat control and hour meter
- Corrosion resistant stainless steel coil cover
- Isolated pump & engine plate with vibration dampeners
- 1/2" Schedule 80 coil



65002



MODEL #	PART#	ENGINE	PUMP	DRIVE	PSI	GPM	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DCT3555331E	65001 ¹	*VANGUARD® 570cc w/ E-Start	COMET	Belt	3500	5.5	7.5 gal	7.5 gal	661 lbs
DCT3555131E	65143 ¹	*CRX® 680 w/ E-Start	COMET	Belt	3500	5.5	7.5 gal	7.5 gal	661 lbs
DCT3555251E	65002 ¹	*HONDA® GX690 w/ E-Start	GENERAL PUMP®	Belt	3500	5.5	7.5 gal	7.5 gal	666 lbs
DCT3555151E	65144 ¹	*CRX® 680 w/ E-Start	GENERAL PUMP®	Belt	3500	5.5	7.5 gal	7.5 gal	666 lbs
DCT4050251E	65004 ¹	*HONDA® GX690 w/ E-Start	GENERAL PUMP®	Belt	4000	5.0	7.5 gal	7.5 gal	613 lbs
DCT4040231E	65005 ¹	*HONDA® GX690 w/ E-Start	COMET	Belt	4000	5.0	7.5 gal	7.5 gal	613 lbs
DCT4050131E	65145 ¹	*CRX® 680 w/ E-Start	COMET	Belt	4000	5.0	7.5 gal	7.5 gal	613 lbs

PUMP

- Premium industrial triplex pumps; COMET or GENERAL PUMP®
- Belt drive configuration
- Axialign™ adjustment system allows for easy belt adjustment and maintenance to be accomplished with a single bolt adjustment
- Oversized by pass hose

FRAME

- Heavy-duty 1½ round tubular steel design
- Powder coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options

ENGINE

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 680	679cc	External
HONDA® GX690	688cc	External
VANGUARD® 570cc	570cc	External

HOSES

- 3/8" x 50' Steel-braided Armor Hose™

DIMENSIONS

L: 46" x W: 42" x H:38"

¹49 State Compliant

²50 State Compliant

^{*}LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 45 for details.

INDUSTRIAL HOT WATER PRESSURE WASHERS

STREAMLINER SERIES

This powerful mobile washing system is designed to be compact enough to fit inside a transit van or truck bed as well as fit through a 36" doorway

UNITS INCLUDE

- Hose
- Lance
- Gun
- Nozzles
- Engine oil 10W-30
- Down stream injector

LIMITED WARRANTY

10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- CRX®, HONDA®, VANGUARD® electric start engines
- Burner on/off rocker switch, thermostat control and hour meter
- High temperature safety switch
- Isolated pump & engine plate with vibration dampeners
- 3.4 kw Generator with two 120v outlets
- Wheel brake system
- 1/2" Schedule 80 coil
- Extended run tanks



65016



MODEL #	PART #	ENGINE	PUMP	DRIVE	PSI	GPM	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DSL4040253E	65016 ¹	*HONDA® GX390 w/ E-Start	GENERAL PUMP®	Gear	4000	4.0	5.0 gal	8.5 gal	540 lbs
DSL4040333E	65017 ¹	*VANGUARD® 479cc w/ E-Start	COMET	Gear	4000	4.0	5.0 gal	8.5 gal	540 lbs
DSL4040133E	65131 ¹	*CRX® 420 w/ E-Start	COMET	Gear	4000	4.0	5.0 gal	8.5 gal	540 lbs
DSL4040232E	65018 ¹	*HONDA® GX390 w/ E-Start	COMET	Direct	4000	4.0	5.0 gal	8.5 gal	540 lbs
DSL4040332E	65019 ¹	*VANGUARD® 479cc w/ E-Start	COMET	Direct	4000	4.0	5.0 gal	8.5 gal	540 lbs
DSL4040132E	65142 ¹	*CRX® 420 w/ E-Start	COMET	Direct	4000	4.0	5.0 gal	8.5 gal	540 lbs

PUMP

- Premium industrial triplex pumps; COMET or GENERAL PUMP®
- Direct or gear drive configuration
- Oversized by pass hose

FRAME

- Heavy-duty 1½ round tubular steel design
- Powder coated for corrosion resistance

HOSES

- 3/8" x 50' Steel-braided Armor Hose™

ENGINE

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 680	679cc	External
HONDA® GX390	389cc	External
VANGUARD® 570cc	570cc	External

DIMENSIONS

L: 33" x W: 40" x H:45"

¹ 49 State Compliant

² 50 State Compliant

³ LOW OIL SHUTDOWN - Indicates engine is equipped with Low Oil Shutdown Technology. See page 45 for details.

INDUSTRIAL HOT WATER PRESSURE WASHERS

ELIMINATOR SERIES

An industrial enclosed cabinet that is designed to be easily serviced. This stationary hot water pressure washer is equipped with a natural gas or LP burner system. A 24V operating system with time delay shut off is standard on all models.

UNITS INCLUDE

- Hose
- Lance
- Gun
- Nozzles

LIMITED WARRANTY

10yr Frame, 5yr Pump, 1yr Motor

FEATURES

- NEMA 4X electrical enclosure with rocker switch, thermostat control, hour meter and soap control switch
- Soap solenoid with metering valve
- Roll down doors with lock & key plus slide out tray for easy servicing
- Time delay shut down
- Remote box ready wired
- Float tank

*Optional Accessories (sold separately and available upon order)

- 7110283 - Draft diverter
- 7110785 - Auto start/stop shut off
- 7110510 - Wired NEMA 4X remote operating station



65030



MODEL #	MODEL #	MOTOR	PUMP	FUEL TYPE	PSI	GPM	PRODUCT WEIGHT
DNG2040031B	65030	230V, 1Ø	COMET	Natural Gas	2000	4.0	807 lbs
DNG2040031C	65031	230V, 3Ø	COMET	Natural Gas	2000	4.0	844 lbs
DNG2040031D	65032	460V, 3Ø	COMET	Natural Gas	2000	4.0	806 lbs
DLP2040031B	65033	230V, 1Ø	COMET	Liquid Propane	2000	4.0	800 lbs
DLP2040031C	65034	230V, 3Ø	COMET	Liquid Propane	2000	4.0	813 lbs
DLP2040031D	65035	460V, 3Ø	COMET	Liquid Propane	2000	4.0	806 lbs
DNG3040031B	65036	230V, 1Ø	COMET	Natural Gas	3000	4.0	834 lbs
DNG3040031C	65037	230V, 3Ø	COMET	Natural Gas	3000	4.0	794 lbs
DNG3040031D	65038	460V, 3Ø	COMET	Natural Gas	3000	4.0	804 lbs
DLP3040031B	65039	230V, 1Ø	COMET	Liquid Propane	3000	4.0	854 lbs
DLP3040031C	65040	230V, 3Ø	COMET	Liquid Propane	3000	4.0	820 lbs
DLP304031D	65041	460V, 3Ø	COMET	Liquid Propane	3000	4.0	806 lbs
DNG3050031B	65042	230V, 1Ø	COMET	Natural Gas	3000	5.0	839 lbs
DNG3050031C	65043	230V, 3Ø	COMET	Natural Gas	3000	5.0	800 lbs
DNG3050031D	65044	460V, 3Ø	COMET	Natural Gas	3000	5.0	810 lbs

INDUSTRIAL HOT WATER PRESSURE WASHERS

ELIMINATOR SERIES CON'T



MODEL #	PART #	MOTOR	PUMP	FUEL TYPE	PSI	GPM	PRODUCT WEIGHT
DLP3050031B	65045	230V, 1Ø	COMET	Liquid Propane	3000	5.0	820 lbs
DLP3050031C	65046	230V, 3Ø	COMET	Liquid Propane	3000	5.0	800 lbs
DLP3050031D	65047	460V, 3Ø	COMET	Liquid Propane	3000	5.0	816 lbs
DNG3080031C	65048	230V, 3Ø	COMET	Natural Gas	3000	8.0	800 lbs
DNG3080031D	65049	460V, 3Ø	COMET	Natural Gas	3000	8.0	760 lbs
DLP3080031C	65050	230V, 3Ø	COMET	Liquid Propane	3000	8.0	814 lbs
DLP3080031D	65051	460V, 3Ø	COMET	Liquid Propane	3000	8.0	820 lbs

PUMP

- Premium industrial triplex pumps; COMET or GENERAL PUMP®
- Belt drive configuration
- Axialign™ adjustment system allows for easy belt adjustment and maintenance to be accomplished with a single bolt adjustment
- Oversized by pass hose

HOSES

- 3/8" x 50' Steel-braided Armor Hose™

DIMENSIONS

L: 30" x W:50" x H:53"

INDUSTRIAL HOT WATER PRESSURE WASHERS

VERSA SERIES

The Versa series is available in powder coated or stainless steel frames, making it a reliable choice for most cleaning equipment needs. The high quality and exceptional design make this horizontal coil electric cleaning system the best in class.

UNITS INCLUDE

- Hose
- Gun
- Lance
- Nozzles

LIMITED WARRANTY

10yr Frame, 5yr Pump, 1yr Motor



***Optional Accessories (sold separately and available upon order)**

- 7110785 - Auto start/stop shut off



MODEL #	PART #	DESCRIPTION	VOLTAGE/ PHASE	PUMP	DRIVE	PSI	GPM	DIESEL TANK	PRODUCT WEIGHT
DVA3040031B	65070	VERSA 3040	230V/1Ph	COMET	Belt	3000	4.0	8.75 gal	694 lbs
DVA2040031B	65071	VERSA 2040	230V/1Ph	COMET	Belt	2000	4.0	8.75 gal	719 lbs
DVA1030031A	65072	VERSA 1030	120V/1Ph	COMET	Belt	1000	3.0	8.75 gal	607 lbs
DVA1030031B	65079	VERSA 1030	230/1Ph	COMET	Belt	1000	3.0	8.75 gal	656 lbs
DVA2525031A-S	65073 (operates at 300°F)	VERSA SUPER STEAMER	120V/1Ph	COMET	Belt	250	2.5	8.75 gal	600 lbs
DVA3040031C/SS	65074	VERSA SS 3040	230V /3Ph	COMET	Belt	3000	4.0	8.75 gal	690 lbs
DVA3040031B/SS	65075	VERSA SS 3040	230V/1Ph	COMET	Belt	3000	4.0	8.75 gal	678 lbs
DVA2040031B/SS	65076	VERSA SS 2040	230V/1Ph	COMET	Belt	2000	4.0	8.75 gal	586 lbs
DVA1030031A/SS	65077	VERSA SS 1030	120V/1Ph	COMET	Belt	1000	3.0	8.75 gal	556 lbs
DVA1030031B/SS	65083	VERSA SS 1030	230V/1Ph	COMET	Belt	1000	3.0	8.75 gal	656 lbs
DVA2525031B-S/SS	65078 (operates at 300°F)	VERSA SS SUPER STEAMER	120V/Ph	COMET	Belt	250	2.5	8.75 gal	574 lbs

PUMP

- Premium industrial triplex pumps; COMET
- Belt drive

FRAME

- Heavy-duty 1½ round tubular steel design
- Powder coated for corrosion resistance
- All stainless steel frame and panels

HOSES

- 3/8" x 50' Steel-braided Armor Hose™

FEATURES

- NEMA 4X electrical enclosure with burner on/off rocker switch, thermostat control and hour meter, time delay-shut off
- Large capacity diesel fuel tank
- Horizontal heat exchanger with stainless steel housing

DIMENSIONS

L: 35" x W: 30" x H: 43"



INDUSTRIAL HOT WATER PRESSURE WASHERS

EQUALIZER SERIES

The Equalizer series is available in gas or electric models to cater to a variety of cleaning applications. This full featured vertical coil pressure washing system is equipped with a wide four-wheel stance to optimize mobility or versatility.

UNITS INCLUDE

- Hose
- Lance
- Gun
- Nozzles
- Adjustable soap control (electric models)

LIMITED WARRANTY

10yr Frame, 5yr Pump, 3yr Engine or 1yr Motor

FEATURES

- NEMA 4X electrical enclosure with rocker switch, thermostat control, hour meter and soap control switch
- Large capacity diesel fuel tank (8.75 gallon)
- Vertical heat exchanger
- 35’ GFCI electrical cord

***Optional Accessories (sold separately and available upon order)**

- 7112623 - Chemical injector kit (gas models)



65068

65063



MODEL #	PART #	DESCRIPTION	ENGINE	VOLTAGE/ PHASE	PUMP	DRIVE	PSI	GPM	PRODUCT WEIGHT
DEZ1030032A	65060	EQUALIZER 1030	N/A	120V 1Ø	COMET	Direct	1000	3.0	519 lbs
DEZ1030032B	65061	EQUALIZER 1030	N/A	230V 1Ø	COMET	Direct	1000	3.0	549 lbs
DEZ2040031B	65063	EQUALIZER 2040	N/A	230V 1Ø	COMET	Belt	2000	4.0	566 lbs
DEZ2040032B	65062	EQUALIZER 2040	N/A	230V 1Ø	COMET	Direct	2000	4.0	526 lbs
DEZ3040031C	65064	EQUALIZER 2040	N/A	230V 3Ø	COMET	Belt	3000	4.0	526 lbs
DEZ3040232E	65068	EQUALIZER 3040HC	*HONDA® GX390	N/A	COMET	Direct	3000	4.0	525 lbs
DEZ3040252E	65069	EQUALIZER 3040HG	*HONDA® GX390	N/A	GENERAL PUMP®	Direct	3000	4.0	514 lbs
DEZ4040132E	65147	EQUALIZER 3040C	*CRX®420 w/ electric start	N/A	COMET	Direct	4000	4.0	525 lbs

PUMP

- Premium industrial triplex pumps; COMET or GENERAL PUMP®
- Direct or Belt drive configuration

FRAME

- Heavy-duty 1½ round tubular steel design
- Powder coated for corrosion resistance
- 13” Premium heavy-duty tires for easy mobility and vibration dampening

ENGINE

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	2.0 gal
HONDA® GX390	389cc	2.0 gal

HOSES

- 3/8” x 50’ Steel-braided Armor Hose™

DIMENSIONS

L: 35” x W: 30” x H: 43”



Indicates engine is equipped with Low Oil Shutdown Technology. See page 45 for details.

INDUSTRIAL HOT/ COLD WATER PRESSURE WASHERS

DOMINATOR SERIES

Designed to be compact and user friendly, the Dominator boasts high quality components and exceptional value. This horizontal coil electric hot water pressure washer is equipped with features such as downstream chemical injection for extra pump protection.

UNITS INCLUDE FOR DOMINATOR & CWE PORTABLE

- Hose
- Lance
- Gun
- Nozzles
- Down stream injector

LIMITED WARRANTY DOMINATOR & CWE PORTABLE

10yr Frame, 5yr Pump, 1yr Motor

FEATURES FOR DOMINATOR

- NEMA 4X electrical enclosure with rocker switch, thermostat control, hour meter and soap control switch
- 8.75gal diesel fuel tank
- Wheel Brake system
- 35’ GFCI electrical cord

***Optional Accessories (sold separately and available upon order)**

- 7114012 - Wall mount stand (CWE Portable Series)



65081

60322



MODEL #	PART #	MOTOR	PUMP	DRIVE	PSI	GPM	DIESEL TANK	PRODUCT WEIGHT
DDM1030031A	65080	120V 1Ø	COMET	Belt	1000	3.0	8.75 gal	477 lbs
DDM2040031B	65081	230V 1Ø	COMET	Belt	2000	4.0	8.75 gal	719 lbs

CWE PORTABLE SERIES

Delco® CWE Portable Series is electric powered, enclosed cabinet style cold water washers. All models feature belt-drive premium triplex plunger pumps with high temperature seals for accepting water up to 160° F.

FEATURES FOR CWE PORTABLE

- Automatic start/stop feature
- Built-in hour meter
- Belt driven slow speed industrial triplex pump
- High temperature, water feed capable up to 165° F
- Handle and wheels are removable

MODEL #	PART #	MOTOR	PUMP	DRIVE	PSI	GPM	DIESEL TANK	PRODUCT WEIGHT
DC1030031A	65080	120V 1Ø	COMET	Belt	1000	3.0	8.75 gal	477 lbs
DC2040031B	65081	230V 1Ø	COMET	Belt	2000	4.0	8.75 gal	719 lbs

PUMP

- Premium industrial triplex pumps; COMET
- Belt drive

FRAME

DOMINATOR SERIES

- Heavy-duty 1½ round tubular steel design
- Powder coated for corrosion resistance

CWE PORTABLE SERIES

- Compact frame for easy storage
- Powder coated for corrosion resistance

HOSES

- 3/8” x 50’ Steel-braided Armor Hose™

COVER

CWE PORTABLE SERIES

- Steel powdered coated panel cover

DIMENSIONS

DOMINATOR SERIES

L: 31” x W: 55” x H: 40”

CWE PORTABLE SERIES

L: 35” x W: 31” x H: 36”

INDUSTRIAL HOT/COLD WATER PRESSURE WASHERS

MOBILE TRAILER SERIES

Delco® Mobile Trailer series pressure washing systems are self-contained cleaning machines. These portable Mobile Trailers are engineered to utilize the power of Delco® machines to bring solutions to job-sites where water supply is limited.

UNITS INCLUDE

- Hose
 - Lance
 - Gun
- Nozzles
 - Down stream injector

LIMITED WARRANTY

10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- 1- 200' High pressure hose reel with 100' high pressure hose
- 1-200' Supply hose reel with 90' supply hose
- Translucent polyethylene water supply tank with easy to read water level indicators
- Jack with swivel wheel for easy maneuvering
- 3500 lb axle with leaf spring suspension for a smooth ride
- Electric brakes system



95101

MODEL #	PART#	PRESSURE & FLOW RTG	ENGINE	PUMP	AXLE RATING	WATER TANK SIZE	TIRE	PRODUCT WEIGHT
DTRS2-3555331E	95100	3500 PSI 5.5 GPM	*VANGUARD® 570cc	COMET Industrial Triplex	3500 lbs Rated Single	225 gal w/ steel straps and drain petcock	14" w/ 6-ply	1500 lbs
DTRS2-3555251E	95101	3500 PSI 5.5 GPM	*HONDA® GX690 w/ Recoil & E-Start	General Pump® Industrial Triplex	3500 lbs Rated Single	225 gal w/ steel straps and drain petcock	14" w/ 6-ply	1500 lbs
DTRS2-4050251E	95103	4000 PSI 5.0 GPM	*HONDA® GX690 w/ Recoil & E-Start	General Pump® Industrial Triplex	3500 lbs Rated Single	225 gal w/ steel straps and drain petcock	14" w/ 6-ply	1500 lbs
DTRS2-4050331E	95104	4000 PSI 5.0 GPM	VANGUARD® 570cc	COMET Industrial Triplex	3500 lbs Rated Single	225 gal w/ steel straps and drain petcock	14" w/ 6-ply	1500 lbs

DTRS3-3555331E	95107	3500 PSI 5.5 GPM	VANGUARD® 570cc	COMET Industrial Triplex	4500 lbs Rated Double	525 gal w/ steel straps and drain petcock	16" w/ 6-ply	3500 lbs
----------------	-------	---------------------	--------------------	-----------------------------	--------------------------	---	--------------	----------



95100



95107

INDUSTRIAL HOT/COLD WATER PRESSURE WASHERS

MOBILE TRAILER SERIES

PUMPS

- General Pump® Industrial Triplex**
- Thermal Relief Valve
 - Forged Brass Head
 - Heat-Resistant Solid Ceramic Plungers
 - Operating on Lubricated Packings
 - External Unloader with Bypass hose

- COMET Industrial Triplex**
- Thermal Relief Valve
 - Forged Brass Head
 - Heat-Resistant Solid Ceramic Plungers
 - Operating on Lubricated Packings
 - External Unloader with Bypass Hose

HOSES

- Armor Hose™**
- Hot water hose with quick connect fittings
 - Sizes:
3/8" x 100' - **All**
- High Pressure Hose Reel**
- Sizes:
200' - **All**
- Supply Hose**
- Sizes:
5/8" x 90" - **All**
- Supply Hose Reel**
- Standard - **All**

ENGINES

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
HONDA® GX690	688cc	External
VANGUARD® 570cc	570cc	External

NOZZLES

- 4 Quick connect nozzle tips: 15°, 25°, 40° and soap to use for a variety of cleaning applications

ADDITIONAL SPECS

- TRAILER FRAME**
- Rectangular thick wall steel tubing
- LIGHTING**
- LED
- TRAILER HITCH BALL SIZE**
- 2" Ball coupling
- Stage 2 & 3 Equipped with 48" Toolbox
 - Stage 3 Equipped with 16 gal Detergent Tank

DIMENSIONS AND WEIGHT

L: 156" x W:68" x H:62"





Driven by **PERFORMANCE™**

Disclaimer of liability: In the preparation of this catalog, every effort has been made to offer the most current, correct, and clearly expressed information as possible. Nevertheless, inadvertent errors in information may occur and information may become outdated. In particular, but without limiting anything stated herein, FNA Group, Inc. disclaims any responsibility for errors and accuracy or timeliness of the information that may be contained in this catalog, also reserves the right to make changes to its product line at any time without notice. If misleading, inaccurate or otherwise inappropriate information is brought to our attention, a reasonable effort will be made to fix or remove it. Please contact us at 1-833-362-7368 with any concerns.

LEARN MORE AT **SIMPSONCLEANING.COM**