



BOMAG
FAYAT GROUP

PRODUCT GUIDE

LIGHT EQUIPMENT.



Technical data may have country specific deviations.

Table of Contents

Page

Tampers

BT 60, BT 65	4
BVT 65	6

Single Direction Vibratory Plates

BVP 10/36	8
BVP 10/30, BVP 12/50 A	10
BVP 18/45	12
BP 25/50	14

Reversible Vibratory Plates

BPR 25/40	16
BPR 35/60, BPR 35/60 DE	18
BPR 45/55 DE, BRP 50/55 DE	20
BPR 60/65, BPR 60/65 DE	22
BPR 70/70 DE	24

Hand-guided Vibratory Rollers

BW 55 E	26
BW 65 H	28

Multi-Purpose Compactor

BMP 8500	30
----------	----

Tandem Rollers

BW 900-50	32
BW 90 AD-5, BW 100 ADM-5	34
BW 100 SL-5, BW 120 SL-5	36

Single Drum Rollers

BW 124 DH-5, BW 124 PDH-5	38
BW 145 D-5, BW 145 DH-5, BW 145 PDH-5	40
BW 177 D-5, BW 177 DH-5, BW 177 PDH-5	42
BW 211 D-5, BW 211 PD-5	44
BW 211 DH-5, BW 211 PDH-5	46
BW 213 DH-5, BW 213 PDH-5	48



PRUS 541 13 010

4-Stroke Tampers BT 60, BT 65

Fields of application:

Earthwork and asphalt construction.


Pipeline, trench and sewer line construction, backfills, foundations and repair work on asphalt.

Standard Equipment

- ☒ Engine Protection System
 - Protective engine covering
 - Paper air filter system with two stages
 - Automatic oil level control
 - Dual fuel filter system
- ☒ Vibration insulated steering bow
- ☒ Self-cleaning air filter housing
- ☒ Protective covering
- ☒ Single point lifting device
- ☒ Recoil starter
- ☒ Plastic castor as loading aid
- ☒ Infinitely variable frequency
- ☒ Combination of engine stop/fuel switch
- ☒ h-/ rpm meter
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Transport device with puncture proof wheels
- ☐ Tamper foot widths (6.3-13in)
- ☐ Tamper foot extensions
- ☐ Special painting
- ☐ Tool kit
- ☐ Service Kit
- ☐ Circuit breaker
- ☐ TOUGH WARRANTY



Dimensions in inches

	B	H	L	L1	W
BT 60	13.8	40.6	28.7	9.1	9.1
BT 65	13.8	40.6	28.7	13.2	11.0

Technical Data

BOMAG BT 60

BOMAG BT 65

Weights

Operating weight CECE	lb	128	150
Basic weight	lb	126	148

Dimensions

Working width (tamper plate)	in	11.0	11.0
------------------------------------	----	------	------

Driving Characteristics

Working speed, max	ft/min	65.6	65.6
Area Coverage max	sqft/hr	2,971	3,617

Drive

Engine manufacturer		Honda	Honda
Type		GXR 120	GXR 120
Emission stage		CARB Phase III	CARB Phase III
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	hp	3.8	3.8
Fuel		Gasoline	Gasoline
Drive system		mech.	mech.
Fuel consump. avg. during operation.....	gal/h	0.2	0.2

Exciter system

Frequency	vpm	600-708	600-708
Impact force	lb	3,372	3,372

Capacities

Fuel	gal	0.8	0.8
------------	-----	-----	-----



PRUS 541 21 010

4-Stroke Tamper BVT 65

Fields of application:

Earthwork and asphalt construction.


Pipeline, trench and sewer line construction, backfills, foundations and repair work on asphalt.

Standard Equipment

- ☒ Engine Protection System
 - Protective engine covering
 - Automatic oil level control
 - Dual fuel filter system
- ☒ Vibration insulated steering bow
- ☒ Self-cleaning air filter housing
- ☒ Protective covering
- ☒ Single point lifting device
- ☒ Recoil starter
- ☒ Plastic castor as loading aid
- ☒ Infinitely variable frequency
- ☒ Combination of engine stop/fuel switch
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Transport device with puncture proof wheels
- ☐ Tamper foot widths (6.3-13in)
- ☐ Tamper foot extensions
- ☐ h-/ rpm meter
- ☐ Special painting
- ☐ Tool kit
- ☐ Service Kit
- ☐ TOUGH WARRANTY



Dimensions in inches

	B	H	L	L1	W
BVT 65	13.8	40.6	28.7	13.2	11.0

Technical Data

BOMAG BVT 65

Weights

Operating weight CECE	lb	148
Basic weight.....	lb	146

Dimensions

Working width (tamper plate).....	in	11.0
-----------------------------------	----	------

Driving Characteristics

Working speed, max	ft/min	65.6
Area Coverage max.....	sqft/hr	3,617

Drive

Engine manufacturer		Honda
Type		GXR 100
Emission stage.....		CARB Phase III
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	3.1
Fuel.....		Gasoline
Drive system.....		mech.
Fuel consump. avg. during operation.....	gal/h	0.2

Exciter system

Frequency.....	vpm	600-708
Impact force	lb	3,597

Capacities

Fuel	gal	0.8
------------	-----	-----



PRUS 834 13 010

Single Direction Vibratory Plate BVP 10/36

Fields of application:

Earthwork, asphalt and paving applications.


Repair work on pipelines, trench construction and landscape projects.

Standard Equipment

- ☒ Vibration insulated steering bow, foldable
- ☒ Detachable steering handle
- ☒ Highly wear-resistant base plate
- ☒ Automatic shutdown at low oil level
- ☒ Recoil starter
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (+15.4lb)
- ☐ Transport wheels (+8.8lb)
- ☐ Plastic mat
- ☐ Tool kit
- ☐ Service Kit
- ☐ Special painting
- ☐ Engine protection frame
- ☐ TOUGH WARRANTY



Dimensions in inches

	B	H	L	L1	W
BVP 10/36	21.1	36.0	43.9	22.0	14.2

Technical Data

BOMAG BVP 10/36

Weights

Operating weight CECE	lb	183
Basic weight.....	lb	181

Dimensions

Working width.....	in	14.2
--------------------	----	------

Driving Characteristics

Working speed, max	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Honda
Type.....		GXR 120
Emission stage		CARB Phase III
Cooling		air
Number of cylinders.....		1
Performance SAE J 1349	hp	3.5
Speed.....	rpm	3,600
Drive system.....		mech.
Fuel		Gasoline
Fuel consump. avg. during operation.....	gal/h	0.2

Exciter system

Frequency.....	vpm	5,400
Centrifugal force	lb	2,248
Amplitude	in	0.039

Capacities

Fuel	gal	0.5
Water.....	gal	1.8



Single Direction Vibratory Plates BVP 10/30, BVP 12/50 A

Fields of application:

Earthwork, asphalt and paving applications.


Repair work on pipelines, trench construction and landscape projects.

Standard Equipment

- ☒ Vibration insulated steering bow (BVP10/30)
- ☒ Detachable steering handle
- ☒ Highly wear-resistant base plate (BVP10/30)
- ☒ Highly wear-resistant cast iron base plate (BVP12/50 A)
- ☒ Automatic shutdown at low oil level
- ☒ Recoil starter
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty
- ☒ Sprinkler system (BVP12/50 A)

Optional Equipment

- ☐ Special painting
- ☐ Plastic mat (BVP10/30)
- ☐ Service Kit
- ☐ TOUGH WARRANTY (BVP12/50 A)



Dimensions in inches

	B	H	L	L1	W
BVP 10/30	19.3	33.1	41.7	20	11.8
BVP 12/50 A	26	35.0	38.2	20.9	19.7

Technical Data

BOMAG BVP 10/30

BOMAG BVP 12/50 A

Weights

Operating weight CECE	lb	104	159
Basic weight	lb	101	148

Dimensions

Working width	in	11.8	19.7
---------------------	----	------	------

Driving Characteristics

Working speed, max	ft/min	82.0	82.0
Max gradeability (dep. on soil con.)	%	30	30

Drive

Engine manufacturer		Honda	Honda
Type		GX 100	GX 120
Emission stage		CARB Phase III	CARB Phase III
Cooling		air	air
Number of cylinders	1	1	
Performance SAE J 1349	hp	2.8	3.5
Speed	rpm	3,600	3,600
Drive system		mech.	mech.
Fuel		Gasoline	Gasoline
Fuel consump. avg. during operation	gal/h	0.2	0.2

Exciter system

Frequency	vpm	6,000	5,640
Centrifugal force	lb	2,248	2,698
Amplitude	in	0.053	0.043
Capacities			
Fuel	gal	0.2	0.5
Water	gal	—	1.8



PRUS 834 12 010

Single Direction Vibratory Plate BVP 18/45

Fields of application:

Earthwork, asphalt and paving applications.


Repair work on pipelines, trench construction and landscape projects.

Standard Equipment

- ☒ Vibration insulated steering bow, foldable
- ☒ Detachable steering handle
- ☒ Highly wear-resistant base plate
- ☒ Automatic shutdown at low oil level
- ☒ Recoil starter
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty
- ☒ Engine protection frame

Optional Equipment

- ☐ Sprinkler system (+15.4lb)
- ☐ Transport wheels (+8.8lb)
- ☐ Plastic mat
- ☐ Tool kit
- ☐ Service Kit
- ☐ TOUGH WARRANTY
- ☐ Special painting



Dimensions in inches

	H	H1	L	L1	W
BVP 18/45	21.1	36.0	43.9	22.0	17.7

Technical Data

BOMAG BVP 18/45

Weights

Operating weight CECE	lb	201
Basic weight	lb	198

Dimensions

Working width	in	17.7
---------------------	----	------

Driving Characteristics

Working speed, max	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Honda
Type		GX 160
Emission stage		CARB Phase III
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	4.8
Speed	rpm	3,600
Drive system		mech.
Fuel		Gasoline
Fuel consump. avg. during operation	gal/h	0.3

Exciter system

Frequency	vpm	5,400
Centrifugal force	lb	4,047
Amplitude	in	0.064

Capacities

Fuel	gal	0.8
Water	gal	1.8



PRUS 230 17 010

Single Direction Vibratory Plate BP 25/50

Fields of application:

Earthwork, asphalt and paving applications.


Repair work on pipelines, trench construction and landscape projects.

Standard Equipment

- ☒ Vibration insulated steering bow, foldable
- ☒ Detachable steering handle
- ☒ Highly wear-resistant base plate
- ☒ Recoil starter
- ☒ Engine protection frame
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ Protective covering
- ☒ 3-2-1 Warranty
- ☒ Automatic shutdown at low oil level

Optional Equipment

- ☐ Sprinkler system (+22lb)
- ☐ Transport wheels (+8.8lb)
- ☐ Plastic mat
- ☐ Special painting
- ☐ Service Kit
- ☐ TOUGH WARRANTY

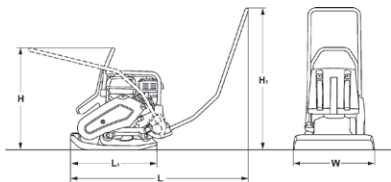

Dimensions in inches

	H	H1	L	L1	W
BP 25/50	25.9	37.9	42.7	21.3	19.7

Technical Data

BOMAG BP 25/50

Weights

Operating weight CECE	lb	238
Basic weight.....	lb	236

Dimensions

Working width.....	in	19.7
--------------------	----	------

Driving Characteristics

Working speed, max	ft/min	98.4
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Honda
Type.....		GX 160
Emission stage		CARB Phase III
Cooling		air
Number of cylinders.....		1
Performance ISO 3046	hp	4.8
Speed.....	rpm	3,600
Drive system.....		mech.
Fuel		Gasoline
Fuel consump. avg. during operation.....	gal/h	0.3

Exciter system

Frequency.....	vpm	92
Centrifugal force	lb	5,620
Amplitude	in	0.069

Capacities

Fuel	gal	0.8
Water.....	gal	3.6



PRUS 692 65 010

Reversible Vibratory Plates BPR 25/40

Fields of application:

Earthwork, asphalt and paving applications.


Construction of roads, forestry roads and railtracks, backfills, trench and sewer line construction, landscape gardening, interlocking paving stones, foundations.

Standard Equipment

- ☒ Protective engine covering
- ☒ Single lever control
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Fully protected V-belt
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Automatic shutdown at low oil level
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (+28.7lb)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Transport wheels, puncture-proof (+8.8lb)
- ☐ Service Kit
- ☐ TOUGH WARRANTY



Dimensions in inches

	H	H1	H2	L	L1	W
BPR 25/40	26.0	34.3	48.0	57.5	25.6	15.7

Technical Data

BOMAG BPR 25/40

Weights

Operating weight CECE	lb	298
Basic weight	lb	291

Dimensions

Working width	in	15.7
Lowest passing height	in	26.0
Min. height w. steering in top position	in	34.3
Max. height w. steering in top position	in	47.2

Driving Characteristics

Working speed, max	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Honda
Type		GX 160
Emission stage		CARB Phase III
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	4.8
Speed	rpm	3,600
Drive system		mech.
Fuel		Gasoline
Fuel consump. avg. during operation	gal/h	0.3

Exciter system

Frequency	vpm	5,100
Centrifugal force	lb	5,620
Amplitude	in	0.061

Capacities

Fuel	gal	0.8
Water	gal	3.2



Reversible Vibratory Plates BPR 35/60, BPR 35/60 DE

Fields of application:

Earthwork, asphalt and paving applications.


Construction of roads, forestry roads and railtracks, backfills, trench and sewer line construction, landscape gardening, interlocking paving stones, foundations.

Standard Equipment

- ☒ Protective engine covering
- ☒ Single lever control
- ☒ Height adjustable steering rod
- ☒ Low vibration steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Fully protected V-belt
- ☒ Automatic decompression
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Automatic shutdown at low oil level (BPR 35/60)
- ☒ 3-2-1 Warranty
- ☒ Hour meter (BPR35/60)
- ☒ Electric starter with hour meter (+44lb) (BPR35/60 D)
- ☒ Fully closed engine protection

Optional Equipment

- ☐ Transport wheels (+11lb)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Service Kit
- ☐ TOUGH WARRANTY

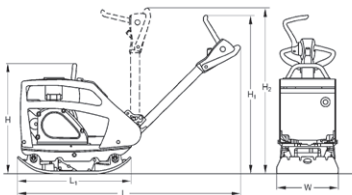

Dimensions in inches

	H	H1	H2	L	L1	W
BPR 35/60	25.5	32.3	48.0	59.4	30.0	23.6
BPR 35/60 DE	27.1	32.3	48.0	59.4	30.0	23.6

Technical Data

BOMAG BRP 35/60

BOMAG BRP 35/60 DE

Weights

Operating weight CECE (W)	lb	452	496
Basic weight.....	lb	446	490

Dimensions

Basic working width	in	23.6	23.6
Lowest passing height.....	in	25.5	27.1
Min. height w. steering in top position...	in	32.3	32.3
Max. height w. steering in top position ..	in	44.1	43.1

Driving Characteristics

Working speed, max	ft/min	88.6	88.6
Max. gradeability (dep. on soil con.)	%	32	32

Drive

Engine manufacturer		Honda	Hatz
Type		GX 160	1B20
Emission stage		CARB Phase III	non EPA
Cooling		air	air
Number of cylinders.....		1	1
Performance SAE J 3046	hp	4.8	—
Performance ISO 3046.....	hp	—	4.2
Fuel		Gasoline	Diesel
Drive system		mech.	mech.
Fuel consump. avg. during operation....	gal/h	0.3	0.2

Exciter system

Frequency.....	vpm	4,800	4,800
Centrifugal force.....	lb	7,868	7,868
Amplitude.....	in	0.051	0.051

Capacities

Fuel	gal	0.8	0.8
------------	-----	-----	-----



PRUS 692 59 010

Reversible Vibratory Plates BPR 45/55 DE, BPR 50/55 DE

Fields of application:

Earthwork and paving applications.


Construction of roads, forestry roads and railtracks, backfills, trench and sewer line construction, landscape gardening, foundations.

Standard Equipment

- ☒ Engine protection hood
- ☒ Comfortable control lever
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Automatic decompression
- ☒ Multi-functional, foldable single-point lifting facility
- ☒ BPR 45: 8.3 hp
- ☒ BPR 50: 9.1 hp
- ☒ Extension plates (21.7in)
- ☒ Electric starter
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Warning signal at low oil level (BPR 45/55 DE)
- ☒ 3-2-1 Warranty
- ☒ Hour meter

Optional Equipment

- ☐ ECONOMIZER (+11lb / 50/55 DE only)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Extension plates (25.6/29.5in)
- ☐ Service Kit
- ☐ BPR 45: 8.3 hp - BPR 50: 9.1 hp
- ☐ TOUGH WARRANTY



Dimensions in inches

	H	H1	H2	L	L1	W	W1	W2
BPR 45/55 DE	31.1	38.6	53.1	66.9	35.4	17.7	21.7	29.5
BPR 50/55 DE	31.1	38.6	53.1	66.9	35.4	17.7	21.7	29.5

Technical Data

BOMAG BRP 45/55 DE

BOMAG BRP 50/55 DE

Weights

Operating weight CECE (W)	lb	849	860
Operating weight CECE (W1)	lb	882	893
Operating weight CECE (W2)	lb	915	926
Basic weight.....	lb	871	882

Dimensions

Basic working width	in	21.7	21.7
Working width without extension bars (W)	in	17.7	17.7
Lowest passing height.....	in	31.1	31.1
Min. height w. steering in top position...	in	38.6	38.6
Max. height w. steering in top position ..	in	48.0	48.0

Driving Characteristics

Working speed, max	ft/min	91.9	91.9
Max. gradeability (dep. on soil con.)	%	35	35

Drive

Engine manufacturer		Lombardini	Hatz
Type		15 LD 440	1B 40
Emission stage.		EPA 4 NRTC	EPA 4 NRTC
Cooling		air	air
Number of cylinders.....		1	1
Performance ISO 3046.....	hp	9.1	9.1
Speed	rpm	3,000	3,000
Drive system		mech.	mech.
Fuel		Diesel	Diesel
Fuel consump. avg. during operation....	gal/h	0.4	0.4

Exciter system

Frequency.....	vpm	4,200	3,960
Centrifugal force	lb	10,116	11,240
Amplitude	in	0.061	0.073

Capacities

Fuel	gal	1.3	1.3
------------	-----	-----	-----



PRUS 692 83 010

Reversible Vibratory Plate BPR 60/65, BPR 60/65 DE

Fields of application:

Earthwork and paving applications.


Construction of roads, forestry roads and railroad tracks, backfills, trench and sewer line construction, landscape gardening, foundations.

Standard Equipment

- ☒ Engine protection hood
- ☒ Comfortable control lever
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working positions
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Automatic decompression
- ☒ Multi-functional, foldable single-point lifting facility
- ☒ Extension plates (25.6in)
- ☒ Electric starter (BPR 60/65 DE only)
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Warning signal at low oil level
- ☒ 3-2-1 Warranty
- ☒ Hour meter

Optional Equipment

- ☐ ECONOMIZER (+11lb)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Extension plates (21.7/29.5in)
- ☐ Service Kit
- ☐ TOUGH WARRANTY



Dimensions in inches

	H	H1	H2	L	L1	W	W1	W2
BPR 60/65	31.1	38.6	53.1	66.9	35.4	17.7	25.6	29.5
BPR 60/65 DE	31.1	38.6	54.3	66.9	35.4	17.7	25.6	29.5

Technical Data

BOMAG BPR 60/65

BOMAG BPR 60/65 DE

Weights

Operating weight CECE (W)	lb	882	970
Operating weight CECE (W1)	lb	926	1,014
Operating weight CECE (W2)	lb	950	1,038
Basic weight	lb	915	1,003

Dimensions

Basic working width	in	25.6	25.6
Working width without extension bars (W)	in	17.7	17.7
Lowest passing height	in	31.1	31.1
Min. height w. steering in top position	in	39.0	38.6
Max. height w. steering in top position	in	48.0	48.0

Driving Characteristics

Working speed, max	ft/min	91.9	91.9
Max. gradeability (dep. on soil con.)	%	35	35

Drive

Engine manufacturer		Honda	Hatz
Type		GX 390	1B40
Emission stage		CARB PHASE 3	EPA 4 NRTC
Cooling		air	air
Number of cylinders		1	1
Performance ISO 3046	hp	11.7	9.0
Speed	rpm	3,600	3,000
Drive system		mech.	mech.
Fuel		Gasoline	Diesel
Fuel consump. avg. during operation	gal/h	0.9	0.4

Exciter system

Frequency	vpm	4,080	4,080
Centrifugal force	lb	13,489	13,489
Amplitude	in	0.077	0.077

Capacities

Fuel	gal	1.6	1.3
------------	-----	-----	-----



PRUS 692 64 010

Reversible Vibratory Plate BPR 70/70 DE

Fields of application:

Earthwork and paving applications.


Construction of roads, forestry roads and railtracks, backfills, trench and sewer line construction, landscape gardening, foundations.

Standard Equipment

- ☒ Engine protection hood
- ☒ Electric starter
- ☒ Tip-Control
- ☒ Back-up drive protection
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Automatic shutdown at low oil level
- ☒ Multi-functional, foldable single-point lifting facility
- ☒ 12.4 hp engine
- ☒ Extension plates (27.6in)
- ☒ 3-2-1 Warranty
- ☒ Hour meter
- ☒ Safety crank-handle for emergency starting

Optional Equipment

- ☐ ECONOMIZER (+11lb)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Extension plates (33.5in)
- ☐ Service Kit
- ☐ TOUGH WARRANTY

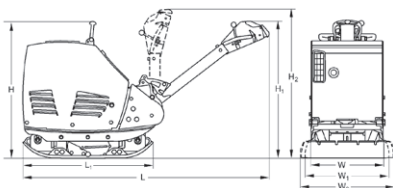

Dimensions in inches

	H	H1	H2	L	L1	W	W1	W2
BPR 70/70 DE	34.3	40.6	57.9	73.2	38.6	21.7	27.6	33.5

Technical Data

BOMAG

BPR 70/70 DE

Weights

Operating weight CECE (W)	lb	1,228
Operating weight CECE (W1)	lb	1,279
Operating weight CECE (W2)	lb	1,312
Basic weight	lb	1,257

Dimensions

Basic working width	in	27.6
Working width without extension bars (W)	in	21.7
Lowest passing height	in	34.3
Min. height w. steering in top position	in	40.6
Max. height w. steering in top position	in	46.5

Driving Characteristics

Working speed, max	ft/min	91.9
Max. gradeability (dep. on soil con.)	%	35

Drive

Engine manufacturer		Hatz
Type		1D 81
Emission stage		EPA 4 NRTC
Cooling		air
Number of cylinders		1
Performance ISO 3046	hp	12.3
Speed	rpm	2,700
Drive system		mech.
Fuel		Diesel
Fuel consump. avg. during operation	gal/h	0.5

Exciter system

Frequency	vpm	3,960
Centrifugal force	lb	15,737
Amplitude	in	0.071

Capacities

Fuel	gal	2.6
------------	-----	-----



PRUS 620 02 010

Hand-guided Single Drum Vibratory Roller BW 55 E

Fields of application:

Earthwork and asphalt applications.


New construction and repairs of sidewalks, hard shoulders, cycle paths, yards and driveways, playgrounds, tennis and sports grounds as well as agricultural and forestry road construction.

Standard Equipment

- ☒ Sprinkler system
- ☒ Vibration dampened steering rod
- ☒ Height adjustable steering rod
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Scrapers front and rear
- ☒ Automatic shutdown at low oil level
- ☒ Single point lifting device
- ☒ Safety control
- ☒ Back-up drive protection
- ☒ Support bars front and rear
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Tool kit
- ☐ Special painting
- ☐ Service Kit
- ☐ TOUGH WARRANTY

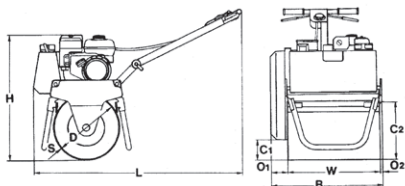

Dimensions in inches

	B	C1	C2	D	H	L	O1	O2	S	W
BW 55 E	26.7	4.9	13.0	15.7	35.4	43.3	3.9	0.7	0.20	22.0

Technical Data

BOMAG BW 55 E

Weights

Operating weight CECE	lb	331
Basic weight	lb	311
Static linear load CECE	lb/in	15.0

Dimensions

Working width	in	22.0
---------------------	----	------

Driving Characteristics

Speed (1), forward	mph	0 - 0.7
Speed (1), reverse	mph	0 - 0.7
Speed (2), forward	mph	0 - 1.0
Speed (2), reverse	mph	0 - 1.0
Max. gradeability (without/with vibr.)	%	25/20

Drive

Engine manufacturer		Honda
Type		GX 120
Emission stage		CARB Phase III
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	3.4
Speed	rpm	2,750
Starting device		Recoil starter
Drive system		mech
Fuel		Gasoline
Fuel consump. avg. during operation	gal/h	0.2

Exciter system

Frequency	vpm	4,620
Amplitude	in	0.020
Centrifugal force	lb	2,248

Sprinkler system

Type of sprinkling	gravity
--------------------------	---------

Capacities

Fuel	gal	0.7
Water	gal	4.2



PRUS 834 09 010

Hand-guided Double Drum Vibratory Roller BW 65 H

Fields of application:

Earthwork and asphalt applications.


New construction and repairs of sidewalks, hard shoulders, cycle paths, yards and driveways, playgrounds, tennis and sports grounds as well as agricultural and forestry road construction.

Standard Equipment

- ☒ Hydrostatic drive
- ☒ Double vibration
- ☒ Mechanical vibration drive
- ☒ Electric starter
- ☒ Infinitely variable speed control
- ☒ Sprinkler system
- ☒ Vibration dampened steering rod
- ☒ Height adjustable steering rod
- ☒ Vibration and throttle regulation on the steering rod
- ☒ 2 scrapers per drum
- ☒ Automatic shutdown at low oil level
- ☒ Single point lifting device
- ☒ Safety crank handle
- ☒ Safety control
- ☒ Back-up drive protection
- ☒ Parking brake
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Tool kit
- ☐ Special painting
- ☐ Service Kit
- ☐ TOUGH WARRANTY

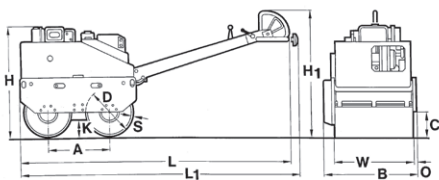

Dimensions in inches

	A	B	C	D	H	H1	K	L	L1	O	S	W
BW 65 H	21.7	30.0	7.9	15.7	37.8	47.6	4.3	86.6	91.3	0.8	0.31	25.6

Technical Data

BOMAG BW 65 H

Weights

Operating weight CECE	lb	1,669
Basic weight	lb	1,603
Average axle load CECE	lb	834
Average static linear load CECE	lb/in	32.7

Dimensions

Overall length, min.	in	48.4
---------------------------	----	------

Driving Characteristics

Speed (1), forward	mph	0 - 3.4
Speed (1), reverse	mph	0 - 1.6
Max. gradeability (without/with vibr.)	%	40/35

Drive

Engine manufacturer		Hatz
Type		1D 42
Emission stage		EPA 4 NRTC
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	8.3
Speed	rpm	2,800
Fuel		Diesel
Drive system		hydrost.
Driven drum		front + rear
Fuel consump. avg. during operation	gal/h	0.3

Brakes

Service brake	hydrost
Parking brake	mech.

Exciter system

Vibrating drum		front + rear
Drive system		mech.
Frequency	vpm	3,300
Amplitude	in	0.018
Centrifugal force	lb	4,946

Sprinkler system

Type of sprinkling	gravity
--------------------------	---------

Capacities

Fuel	gal	1.3
Water	gal	15.9



Multi Purpose Compactor BMP 8500

Fields of application: Earthwork.


Trench and sewer line construction, backfills and foundation work – wherever high demands are placed on mobility, maneuverability and simple operation under severe soil conditions.

Standard Equipment

- ☒ ECOMODE
- ☒ Drum extensions (24/33.5 in)
- ☒ Hydrostatic articulated steering, maintenance free
- ☒ Combination remote control cable/radio
- ☒ Dual directed-vibration system
- ☒ Two travel speed ranges
- ☒ 2 amplitudes
- ☒ Intelligent Vibration Control (IVC)
- ☒ Electric starter
- ☒ BOMAG Operator Safety System
- ☒ 2 scrapers per drum
- ☒ Battery disconnect switch
- ☒ Automatic shutdown at low oil level
- ☒ Automatic engine shut down at a lateral tipping angle of 45°
- ☒ Full prot. hoods made of impact-resistant compound material
- ☒ Single point lifting device
- ☒ Lockable engine cover and dash board
- ☒ Easy Service Concept
 - Diagnostic module with fault code display
 - Hour meter
 - Foldable full protection hood
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Environmentally compliant hydraulic oil
- ☐ Smooth drum (-99.2lb Amplitude 0.06/0.03in)
- ☐ Special painting
- ☐ Mobile quick charger
- ☐ Scraper extensions (33.5in)
- ☐ Service Kit
- ☐ ECONOMIZER
- ☐ TOUGH WARRANTY

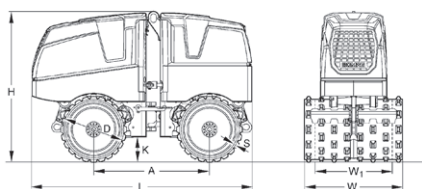

Dimensions in inches

	A	D	H	K	L	S	W	W1
BMP 8500	39.4	20.5	50.2	7.8	74.7	0.63	33.5	24.0

Technical Data

BOMAG BMP 8500

Weights

Operating weight CECE	lb	3,516
Basic weight	lb	3,494
Average axle load CECE	lb	1,758

Driving Characteristics

Speed (1), forward	mph	0.7
Speed (1), reverse	mph	0.7
Speed (2), forward	mph	1.8
Speed (2), reverse	mph	1.8
Max. gradeability (without/with vibr.)	%	55/45

Drive

Engine manufacturer		Kubota
Type		D 1005
Emission stage		TIER 4f
Cooling		water
Number of cylinders		3
Performance ISO 3046	hp	19.4
Speed	rpm	2,600
Fuel		Diesel
Drive system		hydrost.
Driven drum		4
Fuel consump. avg. during operation	gal/h	0.8

Brakes

Service brake	hydrost.
Parking brake	hydromec.

Exciter system

Vibrating drum		front + rear
Drive system		hydraulic
Frequency	vpm	2,520/2,520
Amplitude	in	0.044/0.022
Centrifugal force	lb	16,186/8,093

Capacities

Fuel	gal	6.3
------------	-----	-----



PRUS 834 07 010

Tandem Roller BW 900-50

Fields of application:

Earthwork and asphalt applications.


New construction and repair work for medium and small scale construction projects, on parking lots, sidewalks, cycle paths, playing fields and sports grounds as well as rolling of joints in road construction.

Standard Equipment

- ☒ Hydrostatic travel and vibration drive
- ☒ Travel drive in series
- ☒ Front drum vibration
- ☒ Vibration control in travel lever
- ☒ Oscillating artic. center joint
- ☒ Hydrostatic articulated steering
- ☒ Mechanical parking brake
- ☒ 2 scrapers per drum
- ☒ Plastic water tank
- ☒ Pressure sprinkler system
- ☒ Hour meter
- ☒ Low fuel level indicator
- ☒ Control and warning indicator lights
- ☒ Automatic shutdown at low oil level
- ☒ Lockable anti-vandal dashboard protection
- ☒ Seat belt
- ☒ Single point lifting device
- ☒ Transport lashing and lifting points front/rear
- ☒ Lockable engine cover
- ☒ Emergency engine shut down
- ☒ Corrosion and weather protected ignition switch
- ☒ Back-up alarm

Optional Equipment

- ☐ Foldable ROPS
- ☐ Working lights front and rear
- ☐ Rotary beacon

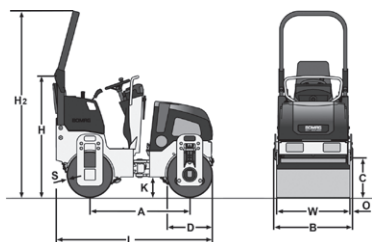

Dimensions in inches

	A	B	C	D	H	H2	K	L	O	S	W
BW 900-50	48.1	37.8	17.7	22.0	68.0	90.2	9.8	77.4	1.2	0.31	35.4

Technical Data

BOMAG BW 900-50

Weights

Operating weight CECE	lb	2,646
Average axle load CECE	lb	1,321
Average static linear load CECE	lb/in	37.3

Dimensions

Overall length, min.	in	35.4
Track radius, inner.	in	64.8

Driving Characteristics

Working speed with vibration	mph	0 - 2.5
Max travel speed	mph	0 - 5.4
Max. gradeability (without/with vibr.)	%	40/30

Drive

Engine manufacturer		Honda
Type		GX 630
Emission stage		TIER 4f
Cooling		air
Number of cylinders		2
Performance SAE J 1349	hp	20.0
Speed	rpm	3,300
Electric equipment	V	12
Drive system		hydrost.
Driven drum		2

Brakes

Service brake		hydrost.
Parking brake		mech.

Steering

Steering system		oscil artic.
Steering method		hydrost
Steering angle +/-	deg	33
Oscillating angle +/-	deg	6

Exciter system

Vibrating drum		front
Drive system		hydrost.
Frequency	vpm	4,200
Amplitude	in	0.020
Centrifugal force	lb	3,995

Sprinkler system

Type of sprinkling		pressure
--------------------------	--	----------

Capacities

Fuel	gal	7.1
Water	gal	36.2



PRUS 462 00 010

Tandem Rollers

BW 90 AD-5, BW 100 ADM-5

Fields of application:

Earthwork and asphalt applications.


New construction and repair work for medium and small scale construction projects, on parking lots, sidewalks, cycle paths, playing fields and sports grounds as well as rolling of joints in road construction.

Standard Equipment

- ☒ Hydrostatic travel and vibration drive
- ☒ Travel drive in series
- ☒ 2 scrapers per drum, spring loaded and tiltable
- ☒ Pressure sprinkler system with interval switch
- ☒ Multi-function travel lever
- ☒ Multi-function display incl. operating hour meter
- ☒ Water level
- ☒ Emergency STOP
- ☒ Individual control, vibration
- ☒ Intelligent Vibration Control (IVC)
- ☒ Integrated stowage compartment
- ☒ Adjustable operator's seat
- ☒ Seat contact switch
- ☒ Vandalism protection
- ☒ 12V socket
- ☒ Working lights front and rear
- ☒ Back-up alarm
- ☒ Lashing eyes, galvanized
- ☒ Single point lifting device
- ☒ Lockable engine hood made of composite material

Optional Equipment

- ☐ Foldable ROPS incl. seat belt
- ☐ Double travel lever
- ☐ Seat heating
- ☐ ECONOMIZER with asphalt temperature display
- ☐ BOMAG TELEMATIC
- ☐ Theft protection
- ☐ Indicator and hazard lights
- ☐ Rotary beacon
- ☐ Battery disconnect switch
- ☐ Special painting
- ☐ Edge cutter
- ☐ Backup warning buzzer with broadband technology

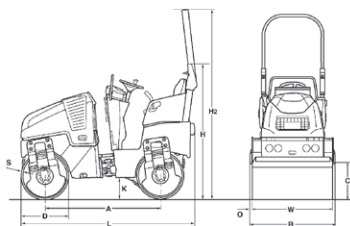

Dimensions in inches

	A	B	C	D	H	H2
BW 90 AD-5	58.4	37.6	17.0	22.8	64.1	90.7
BW 100 ADM-5	58.4	41.6	17.0	22.8	64.1	90.7
	K	L	O	S	W	
BW 90 AD-5	10.0	86.4	1.1	0.47	35.4	
BW 100 ADM-5	10.0	86.4	1.1	0.47	39.4	

Technical Data

BOMAG BW 90 AD-5

BOMAG BW 100 ADM-5

Weights

Operating weight CECE	lb	3,527	3,748
Average static linear load CECE	lb/in	49.8	47.6
Gross weight.....	lb	4,189	4,189

Dimensions

Working width.....	in	35.4	39.4
Track radius, inner	in	79.9	78.0

Driving Characteristics

Speed	mph	0 - 6.2	0 - 6.2
Working speed with vibration	mph	0 - 6.2	0 - 6.2
Max. gradeability without/with vibr.....	%	40/30	40/30

Drive

Engine manufacturer		Kubota	Kubota
Type		D 902	D 902
Emission stage.		TIER 4f	TIER 4f
Cooling.....		water	water
Number of cylinders.....		3	3
Performance ISO 14396.....	kW	15.1	15.1
Performance SAE J 1995	hp	20.2	20.2
Speed	rpm	3,000	3,000
Speed adjustment 1	rpm	2,100	2,100
Speed adjustment 2.....	rpm	3,000	3,000
Electric equipment.....	V	12	12
Driven drum.....		front + rear	front + rear

Brakes

Service brakes.....		hydropneum.	hydropneum.
Parking brake		hydropneum.	hydropneum.

Steering

Steering system.....		oscil. artic.	oscil. artic.
Steering method		hydropneum.	hydropneum.
Steering / oscillating angle +/-.....	deg	33/8	33/8
Crab walk		0 - 50	0 - 50

Exciter system

Vibrating drum.....		front + rear	front + rear
Drive system.....		hydropneum.	hydropneum.
Frequency	vpm	2,520/3,780	2,520/3,780
Amplitude	in	0.020	0.016
Centrifugal force	lb	1,776/3.867	1,776/3.867

Sprinkler system

Type of sprinkling		pressure	pressure
--------------------------	--	----------	----------

Capacities

Fuel	gal	7.9	7.9
Water.....	gal	26.4	26.4



PRUS 880 43 010

Tandem Rollers

BW 100 SL-5, BW 120 SL-5

Fields of application:

Earthwork and asphalt applications.


New construction and repair work for medium and small scale construction projects, on parking lots, sidewalks, cycle paths, playing fields and sports grounds as well as rolling of joints in road construction.

Standard Equipment

- ☒ Hydrostatic travel and vibration drive
- ☒ Travel drive in series
- ☒ 2 scrapers per drum, spring loaded and tiltable
- ☒ Pressure sprinkler system with interval switch
- ☒ Multi-function travel lever
- ☒ Multi-function display incl. operating hour meter
- ☒ Water level
- ☒ Emergency STOP
- ☒ Individual control, vibration
- ☒ Intelligent Vibration Control (IVC)
- ☒ Integrated stowage compartment
- ☒ Adjustable operator's seat
- ☒ Seat contact switch
- ☒ Vandalism protection
- ☒ 12V socket
- ☒ Working lights front and rear
- ☒ Back-up alarm
- ☒ Lashing eyes, galvanized
- ☒ Single point lifting device
- ☒ Lockable engine hood made of composite material
- ☒ Foldable ROPS incl. seat belt
- ☒ Sliding seat incl. double travel lever

Optional Equipment

- ☐ Sun roof, foldable with ROPS
- ☐ ECONOMIZER with asphalt temperature display
- ☐ BOMAG TELEMATIC
- ☐ Indicator and hazard lights
- ☐ Rotary beacon
- ☐ Battery disconnect switch
- ☐ Theft protection
- ☐ Special painting



Dimensions in inches

	A	B	C	D	H	H2
BW 100 SL-5	69.0	42.2	20.6	27.6	71.2	101.1
BW 120 SL-5	69.0	50.1	20.6	27.6	71.2	101.1
	K	L	O	S	W	
BW 100 SL-5	10.0	99.6	1.4	0.39	39.4	
BW 120 SL-5	10.0	99.6	1.4	0.39	47.2	

Technical Data

BOMAG BW 100 SL-5

BOMAG BW 120 SL-5

Weights

Operating weight w. ROPS CECE	lb	5,181	5,512
Average static linear load CECE	lb/in	65.8	58.3
Gross weight.....	lb	6,173	6,173

Dimensions

Working width.....	in	39.4	47.2
Track radius, inner	in	100.4	96.5

Driving Characteristics

Speed.....	mph	0 - 5.6	0 - 5.6
Working speed with vibration	mph	0 - 3.1	0 - 3.1
Max. gradeability without/with vibr.....	%	40/30	40/30

Drive

Engine manufacturer		Kubota	Kubota
Type		D 1703 DI	D 1703 DI
Emission stage		TIER 4f	TIER 4f
Cooling.....		water	water
Number of cylinders.....		3	3
Performance ISO 14396.....	kW	18.5	18.5
Performance SAE J 1995	hp	24.8	24.8
Speed.....	rpm	2,200	2,200
Electric equipment.....	V	12	12
Driven drum.....		front + rear	front + rear

Brakes

Service brakes.....		hydrot.	hydrot.
Parking brake		hydromec.	hydromec.

Steering

Steering system.....		oscil. artic.	oscil. artic.
Steering method.		hydrot.	hydrot.
Steering / oscillating angle +/-.....	deg	32/10	32/10
Crab walk		0 - 50	0 - 50

Exciter system

Vibrating drum.....		front + rear	front + rear
Drive system.....		hydrot.	hydrot.
Frequency.....	vpm	4,320	4,320
Amplitude	in	0.020	0.020
Centrifugal force	lb	7,644	8,992

Sprinkler system

Type of sprinkling		pressure	pressure
--------------------------	--	----------	----------

Capacities

Fuel	gal	9.6	9.6
Water.....	gal	43.6	43.6



PRUS 586 57 010

Single Drum Rollers

BW 124 DH-5, BW 124 PDH-5

Fields of application:


Built for medium compaction duties in road construction, car parks, trenches and backfill. D-series models are suitable for granular materials (sand, gravel, crushed rock), semi-cohesive soils and hydraulically bound materials. PD-series models are primarily used on cohesive soils with high water contents. All BW 124 models have good climbing performance with high-torque drive systems. With its high traction, the BW 124 is ideal for use with a dozer blade transforming the BW 124 into an effective combination unit for spreading and compaction.

Standard Equipment

- ☒ Hydrostatic travel and vibration drive
- ☒ Double pump system for travel drive
- ☒ 2 Spring accumulator brakes
- ☒ Differential lock
- ☒ Hydrostatic articulated steering
- ☒ Contact scrapers
- ☒ Operating/Control Equipment
 - Hour meter
 - Charge control
 - Parking brake
 - Engine oil pressure
 - Engine temperature
 - Air cleaner pollution
 - Fuel level indicator
- ☒ Warning horn
- ☒ Transport lashing and lifting points front/rear
- ☒ Lockable anti-vandal dashboard protection
- ☒ Back-up alarm
- ☒ Emergency stop button
- ☒ ROPS/FOPS with safety belt
- ☒ Seat contact switch
- ☒ Battery disconnect switch

Optional Equipment

- ☐ ECONOMIZER
- ☐ Working lights
- ☐ Rear windscreen
- ☐ Dozer blade
- ☐ Special painting
- ☐ Rotary beacon
- ☐ Comfort package
- ☐ BOMAG TELEMATIC

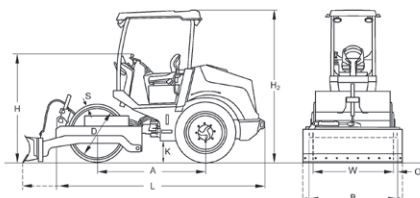

Dimensions in inches

	A	B	D	H	H2	K	L
BW 124 DH-5	71.5	51.6	37.8	72.8	99.2	12.6	138.6
BW 124 PDH-5	71.5	51.6	37.8	72.8	99.2	12.6	138.6
	O	S	W				
BW 124 DH-5	2.2	0.59	47.2				
BW 124 PDH-5	2.2	0.59	47.2				

Technical Data

BOMAG BW 124 DH-5

BOMAG BW 124 PDH-5

Weights

Gross weight.....	lb	8,598	8,819
Operating weight CECE	lb	7,165	7,474
Axle load, drum / wheels CECE	lb	3,351/3,814	3,527/3,946
Static linear load CECE.....	lb/in	70.9	—

Dimensions

Working width.....	in	47.2	47.2
Track radius, inner	in	89.0	89.0

Driving Characteristics

Speed	mph	0 - 5.6	0 - 5.6
Max. gradeability without/with vibr.	%	55/55	55/55

Drive

Engine manufacturer		Kubota	Kubota
Type		V2403	V2403
Emission stage		TIER 4f	TIER 4f
Exhaust gas aftertreatment.....		DPF	DPF
Cooling		water	water
Number of cylinders.....		4	4
Performance ISO 3046.....	kW	34.0	34.0
Performance SAE J 1995	hp	46.0	46.0
Speed	rpm	2,400	2,000
Fuel		Diesel	Diesel
Electric equipment.....	V	12	12
Drive system.....		hydropst.	hydropst.
Drum driven.....		standard	standard

Drums and Tires

Tire size	9.5-24 4PR	9.5-24 4PR
-----------------	------------	------------

Brakes

Service brakes.....	hydropst.	hydropst.
Parking brake	hydropmec.	hydropmec.

Steering

Steering system.....	oscil. artic.	oscil. artic.
Steering method	hydropst.	hydropst.
Steering / oscillating angle +/-.....	deg	35/12

Exciter system

Drive system.....	hydropst.	hydropst.
Frequency	vpm	2,460
Amplitude	in	0.067
Centrifugal force	lb	19,101

Capacities

Fuel	gal	15.9	15.9
------------	-----	------	------



PRUS 586 00 010

Single Drum Rollers

BW 145 D-5, BW 145 DH-5, BW 145 PDH-5

Fields of application:


Built for medium compaction duties in road construction, car parks, trenches and backfill. D-series models are suitable for granular materials (sand, gravel, crushed rock), semi-cohesive soils and hydraulically bound materials. PD-series models are primarily used on cohesive soils with high water contents. H-series models have good climbing performance and high-torque drive systems.

Standard Equipment

- ☒ BOMAG ECOMODE
- ☒ Double pump system for travel drive (DH/PDH)
- ☒ No-Spin differential lock
- ☒ Rear axle with twin spring accumulator brakes
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Warning, information and operation displays
- ☒ Single lever control for travel and vibration
- ☒ Emergency STOP
- ☒ Warning horn
- ☒ Back-up warning system
- ☒ Noise insulation
- ☒ 1 Scrapers (D/DH)
- ☒ 2 Scrapers (PDH)
- ☒ Tractor tires (PDH)
- ☒ Working lights front/rear

Optional Equipment

- ☐ ROPS cabin with seat belts
- ☐ ROPS/FOPS with safety belt
- ☐ Indicator and hazard lights
- ☐ Rotary beacon
- ☐ Rear camera
- ☐ Air conditioning
- ☐ Adjustable steering column
- ☐ Sliding window
- ☐ Radio (Bluetooth)
- ☐ BOMAG ECOSTOP
- ☐ ECONOMIZER
- ☐ TERRAMETER
- ☐ Printer for TERRAMETER
- ☐ BOMAG TELEMATIC
- ☐ Special painting
- ☐ Reversing alarm buzzer with broadband audio
- ☐ Padfoot segment kit (D/DH)
- ☐ 2 Contact scrapers (D/DH)
- ☐ Dozer Blade blade (DH/PDH)
- ☐ Comfort package
- ☐ LED Working lights (Cabin)

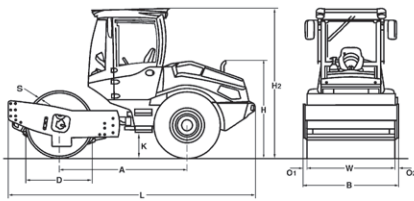

Dimensions in inches

	A	B	D	H	H2	K
BW 145 D-5	88.6	61.4	41.7	61.8	107.1	12.6
BW 145 DH-5	88.6	61.4	41.7	61.8	107.1	12.6
BW 145 PDH-5	88.6	61.4	41.7	61.8	107.1	12.6
	L	O1	O2	S	W	
BW 145 D-5	171.9	2.6	2.6	0.79	56.1	
BW 145 DH-5	171.9	2.6	2.6	0.79	56.1	
BW 145 PDH-5	171.9	2.6	2.6	0.59	56.1	

Technical Data		BOMAG BW 145 D-5	BOMAG BW 145 DH-5	BOMAG BW 145 PDH-5
----------------	--	-----------------------------	------------------------------	-------------------------------

Weights

Gross weight.....	lb	12,346	13,228	12,346
Operating weight CECE w. ROPS. cabin	lb	10,472	10,626	11,177
Axle load, drum CECE	lb	5,490	5,556	6,107
Axle load, Wheels CECE.....	lb	4,982	5,071	5,071
Static linear load.....	lb/in	97.8	99.0	

Dimensions

Working width.....	in	56.1	56.1	56.1
Track radius, inner.....	in	113.8	113.8	113.8

Driving Characteristics

Speed (1).....	mph	0 - 2.5	0 - 6.2	0 - 6.2
Speed (2).....	mph	0 - 2.8		
Speed (3).....	mph	0 - 4.0		
Speed (4).....	mph	0 - 5.6		
Max gradeability wo/with vibr.....	%	51/48	64/59	64/59

Drive

Engine manufacturer		Kubota	Kubota	Kubota
Type		V3307 CR-T	V3307 CR-T	V3307 CR-T
Emission stage		TIER 4f	TIER 4f	TIER 4f
Exhaust gas aftertreatment.....		DOC+DPF	DOC+DPF	DOC+DPF
Cooling.....		water	water	water
Number of cylinders.....		4	4	4
Performance ISO 3046.....	KW	55.4	55.4	55.4
Performance SAE J 1995	hp	74.0	74.0	74.0
Speed.....	rpm	2,400	2,400	2,400
Fuel		Diesel	Diesel	Diesel
Electric equipment.....	V	12	12	12
Drive system.....		hydrost.	hydrost.	hydrost.
Drum driven.....		standard	standard	standard

Drums and Tires

Tire size.....		12.5-20 12PR	12.5-20 12PR	12.4-24/8PR
----------------	--	--------------	--------------	-------------

Brakes

Service brake		hydrost.	hydrost.	hydrost.
Parking brake		hydromec.	hydromec.	hydromec.

Steering

Steering system.....		oscil. artic.	oscil. artic	oscil. artic
Steering method.....		hydrost.	hydrost.	hydrost.
Steering/oscillating angle+/-.....	deg	35/12	35/12	35/12

Exciter system

Drive system.....		hydrost.	hydrost.	hydrost.
Frequency.....	vpm	1,860/2,100	1,860/2,100	1,860/2,100
Amplitude.....	in	0.067/0.032	0.067/0.032	0.057/0.028
Centrifugal force.....	lb	17,985/12,589	17,985/12,589	17,985/12,589
Centrifugal force.....	t	8.2/5.7	8.2/5.7	8.2/5.7

Capacities

Fuel	gal	29.1	29.1	29.1
------------	-----	------	------	------

Technical modifications reserved. Machines may be shown with options.



PRUS 586 03 010

Single Drum Rollers

BW 177 D-5, BW 177 DH-5, BW 177 PDH-5

Fields of application:


Built for medium compaction duties in road construction, car parks, trenches and backfill. D-series models are suitable for granular materials (sand, gravel, crushed rock), semi-cohesive soils and hydraulically bound materials. PD-series models are primarily used on cohesive soils with high water content. H-series models have good climbing performance and high-torque drive systems.

Standard Equipment

- ☒ BOMAG ECOMODE
- ☒ Double pump system for travel drive (DH/PDH)
- ☒ No-Spin differential lock
- ☒ Rear axle with twin spring accumulator brakes
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Warning, information and operation displays
- ☒ Single lever control for travel and vibration
- ☒ Emergency STOP
- ☒ Warning horn
- ☒ Back-up warning system
- ☒ Noise insulation
- ☒ 2 Contact scrapers Plastic (D/DH)
- ☒ 2 Scrapers (PDH)
- ☒ Tractor tires (PDH)
- ☒ Working lights front/rear

Optional Equipment

- ☐ ROPS cabin with seat belts
- ☐ ROPS/FOPS with safety belt
- ☐ Tractor tires (D/DH)
- ☐ Indicator and hazard lights
- ☐ Rotary beacon
- ☐ Rear camera
- ☐ Air conditioning
- ☐ Adjustable steering column
- ☐ Sliding window
- ☐ Radio (Bluetooth)
- ☐ BOMAG ECOSTOP
- ☐ ECONOMIZER
- ☐ TERRAMETER
- ☐ Printer for TERRAMETER
- ☐ BOMAG TELEMATIC
- ☐ BCM 05 Documentation system
- ☐ Special painting
- ☐ Reversing alarm buzzer with broadband audio
- ☐ Padfoot segment kit (D/DH)
- ☐ Blade (DH/PDH)
- ☐ Environmentally compliant hydraulic oil
- ☐ Intelligent Compaction (IC) interface
- ☐ LED Working lights (Cabin)
- ☐ Comfort package

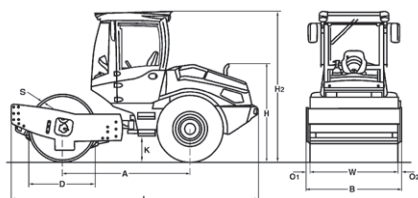

Dimensions in inches

	A	B	D	H	H2	K
BW 177 D-5	92.5	71.7	48.3	65.1	110.2	15.0
BW 177 DH-5	92.5	71.7	48.3	65.1	110.2	15.0
BW 177 PDH-5	92.5	71.7	47.6	65.1	110.2	15.0
	L	O1	O2	S	W	
BW 177 D-5	178.8	2.6	2.6	0.79	66.4	
BW 177 DH-5	178.8	2.6	2.6	0.79	66.4	
BW 177 PDH-5	178.8	2.6	2.6	0.59	66.4	

Technical Data

BOMAG BW 177 D-5

BOMAG BW 177 DH-5

BOMAG BW 177 PDH-5

Weights

Gross weight.....	lb	17,196	18,078	16,755
Operating weight CECE w. ROPS cabin.....	lb	14,551	14,771	15,322
Axle load, drum CECE.....	lb	8,819	8,929	9,480
Axle load, Wheels CECE.....	lb	5,732	5,842	5,842
Static linear load CECE.....	lb/in	132.9	134.5	

Dimensions

Working width.....	in	66.4	66.4	66.4
Track radius, inner.....	in	117.1	117.1	117.1

Driving Characteristics

Speed (1).....	mph	0 - 2.8	0 - 10	0 - 10
Speed (2).....	mph	0 - 3.4		
Speed (3).....	mph	0 - 4.7		
Speed (4).....	mph	0 - 6.5		
Max gradeability wo/with vibr.....	%	49/46	61/58	61/58

Drive

Engine manufacturer.....		Kubota	Kubota	Kubota
Type.....		V3307 CR-T	V3307 CR-T	V3307 CR-T
Emission stage.....		TIER 4f	TIER 4f	TIER 4f
Exhaust gas aftertreatment.....		DOC+DPF	DOC+DPF	DOC+DPF
Cooling.....		water	water	water
Number of cylinders.....		4	4	4
Performance ISO 3046.....	kw	55.4	55.4	55.4
Performance SAE J 1995.....	hp	74.0	74.0	74.0
Speed.....	rpm	2,400	2,400	2,400
Fuel.....		Diesel	Diesel	Diesel
Electric equipment.....	V	12	12	12
Drive system.....		hydrost.	hydrost.	hydrost.
Drum driven.....		standard	standard	standard

Drums and Tires

Tire size.....		14.9-24/8PR	14.9-24/8PR	14.9-24/8PR
----------------	--	-------------	-------------	-------------

Brakes

Service brake.....		hydrost.	hydrost.	hydrost.
Parking brake.....		hydromec.	hydromec.	hydromec.

Steering

Steering system.....		oscil. artic.	oscil. artic.	oscil. artic.
Steering method.....		hydrost.	hydrost.	hydrost.
Steering/oscillating angle+/-.....	deg	35/12	35/12	35/12

Exciter system

Drive system.....		hydrost.	hydrost.	hydrost.
Frequency (1).....	vpm	1,740	1,740	1,740
Frequency (2).....	vpm	1,920	1,920	1,920
Amplitude.....	in	0.075/0.032	0.075/0.032	0.075/0.032
Centrifugal force.....	lb	25,179/16,636	25,179/16,636	25,179/16,636
Centrifugal force.....	t	11.47/7.5	11.47/7.5	11.47/7.5

Capacities

Fuel.....	gal	29.1	29.1	29.1
-----------	-----	------	------	------

Technical modifications reserved. Machines may be shown with options.



PRUS 586 08 010

Single Drum Rollers

BW 211 D-5, BW 211 PD-5

Fields of application:


Heavy-duty compaction work on thick fill materials. D-series models are suited to the compaction of hydraulically bound material, sand, gravel, crushed rock, semi-cohesive soil and rockfill. PD models are well suited to heavy cohesive soils with high water content.

Standard Equipment

- ☒ BOMAG ECOMODE
- ☒ No-Spin differential lock
- ☒ Rear axle with twin spring accumulator brakes
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Seat with arm rest and adj. for position and height
- ☒ Sliding window
- ☒ Battery disconnect switch
- ☒ Single lever control for travel and vibration
- ☒ Warning, information and operation displays with LCD
- ☒ Loading mode
- ☒ Emergency STOP
- ☒ Working lights front/rear
- ☒ Back-up alarm
- ☒ Noise insulation
- ☒ 2 Scrapers
- ☒ Warning horn

Optional Equipment

- ☐ ROPS/FOPS cabin with seat belts - Sliding window
- ☐ ROPS/FOPS with safety belt
- ☐ Rear camera
- ☐ Air conditioning
- ☐ Radio (Bluetooth)
- ☐ Pre-start cabin heating
- ☐ Comfort package: Adjustable seat and adjustable steering column
- ☐ Rotary beacon
- ☐ Indicator and hazard lights
- ☐ BOMAG ECOSTOP
- ☐ ECONOMIZER
- ☐ TERRAMETER
- ☐ BOMAG TELEMATIC POWER
- ☐ Special painting
- ☐ Padfoot segment kit (D)
- ☐ Intelligent Compaction (IC) interface
- ☐ LED Working lights (Cabin)

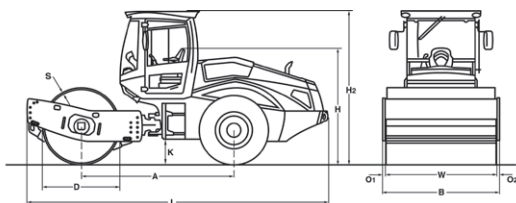

Dimensions in inches

	A	B	D	H	H2	K	L	O1	O2	S	W
BW 211 D-5	117.1	89.4	59.1	89.0	117.7	19.3	231.1	2.8	2.8	0.98	83.9
BW 211 PD-5	117.1	89.4	58.3	89.0	117.7	19.3	231.1	2.8	2.8	0.98	83.9

Technical Data

BOMAG

BW 211 D-5

BOMAG

BW 211 PD-5

Weights

Gross weight.....	lb	28,418	28,109
Operating weight CECE w. ROPS-cabin	lb	23,369	26,676
Axle load, drum CECE	lb	12,500	15,807
Axle load, wheels CECE.....	lb	10,869	10,869
Static linear load CECE.....	lb/in	149.1	—

Dimensions

Working width.....	in	83.9	83.9
Track radius, inner	in	144.9	144.9

Driving Characteristics

Speed (1)	mph	0 - 3.1	0 - 3.1
Speed (2)	mph	0 - 3.7	0 - 3.7
Speed (3)	mph	0 - 5.0	0 - 5.0
Speed (4)	mph	0 - 6.8	0 - 6.8
Max. gradeability without/with vibr.	%	51/48	54/51

Drive

Engine manufacturer		Deutz	Deutz
Type		TCD 3.6L4	TCD 3.6L4
Emission stage		TIER 4f	TIER 4f
Exhaust gas aftertreatment.....		DOC+SCR	DOC+SCR
Cooling		liquid	liquid
Number of cylinders.....		4	4
Performance ISO 3046.....	kW	95.0	95.0
Performance SAE J 1995.....	hp	128.0	128.0
Speed	rpm	2,000	2,000
Fuel		Diesel	Diesel
Electric equipment.....	V	12	12
Drive system.....		hydropst.	hydropst.
Drum driven.....		standard	standard

Drums and Tires

Number of pad feet.....		—	150
Area of one pad foot	sq.in	—	21.2
Area of pad feet	in	—	3.9
Tire size.....		23.1-26 12PR	23.1-26 12PR

Brakes

Service brakes.....		hydropst.	hydropst.
Parking brake		hydropmec.	hydropmec.

Steering

Steering system.....		oscil. artic.	oscil. artic.
Steering method		hydropst.	hydropst.
Steering / oscillating angle +/-.....	deg	35/12	35/12

Exciter system

Drive system.....		hydropst.	hydropst.
Frequency.....	vpm	1,800/2,040	1,800/2,040
Amplitude	in	0.077/0.039	0.067/0.035
Centrifugal force	lb	53,954/35,520	64,071/43,613
Centrifugal force.....	t	24.5/16.1	29.1/19.8

Capacities

Fuel	gal	66.0	66.0
------------	-----	------	------

Technical modifications reserved. Machines may be shown with options.



PRUS 586 09 010

Single Drum Rollers

BW 211 DH-5, BW 211 PDH-5

Fields of application:


For medium to heavy-duty compaction work. D-series models are suited to the compaction of hydraulically bound material, sand, gravel, crushed rock, semi-cohesive soil and rockfill. PD models are well suited to heavy cohesive soils with high water content. H-series models have good climbing capabilities and powerful torque-drives.

Standard Equipment

- ☒ BOMAG ECOMODE
- ☒ Double pump system for travel drive
- ☒ No-Spin differential lock
- ☒ Rear axle with twin spring accumulator brakes
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Seat with arm rest and adj. for position and height
- ☒ Sliding window
- ☒ Battery disconnect switch
- ☒ Single lever control for travel and vibration
- ☒ Warning, information and operation displays with LCD
- ☒ Loading mode
- ☒ Emergency STOP
- ☒ Working lights front / rear
- ☒ Back-up alarm
- ☒ Noise insulation
- ☒ 2 Scrapers
- ☒ Warning horn
- ☒ Tractor tires (PDH)

Optional Equipment

- ☐ ROPS/FOPS cabin with seat belts
 - Sliding window
- ☐ ROPS/FOPS with safety belt
- ☐ Rear camera
- ☐ Air conditioning
- ☐ Radio (Bluetooth)
- ☐ Pre-start cabin heating
- ☐ Comfort package: Adjustable seat and adjustable steering column
- ☐ Rotary beacon
- ☐ Indicator and hazard lights
- ☐ BOMAG ECOSTOP
- ☐ ECONOMIZER
- ☐ TERRAMETER
- ☐ BOMAG TELEMATIC POWER
- ☐ Special painting
- ☐ Pad foot segment kit (DH)
- ☐ Intelligent Compaction (IC) interface
- ☐ Dozer blade
- ☐ LED Working lights (Cabin)

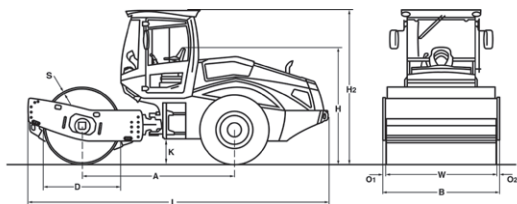

Dimensions in inches

	A	B	D	H	H2	K	L	O1	O2	S	W
BW 211 DH-5	117.1	89.4	59.1	89.0	117.7	19.3	231.1	2.8	2.8	0.98	83.9
BW 211 PDH-5	117.1	89.4	58.3	89.0	117.7	19.3	231.1	2.8	2.8	0.98	83.9

Technical Data

BOMAG

BW 211 DH-5

BOMAG

BW 211 PDH-5

Weights

Gross weight.....	lb	30,578	30,644
Operating weight CECE w. ROPS-cabin	lb	24,008	27,690
Axle load, drum CECE	lb	12,963	16,358
Axle load, wheels CECE.....	lb	11,054	11,332
Static linear load CECE.....	lb/in	154.6	—

Dimensions

Working width.....	in	83.9	83.9
Track radius, inner	in	144.9	144.9

Driving Characteristics

Speed.....	mph	0 - 7.5	0 - 7.5
Max. gradeability without/with vibr.....	%	60/58	62/60

Drive

Engine manufacturer	Deutz	Deutz
Type	TCD 3.6L4	TCD 3.6L4
Emission stage	TIER 4f	TIER 4f
Exhaust gas aftertreatment.....	DOC+SCR	DOC+SCR
Cooling	liquid	liquid
Number of cylinders.....	4	4
Performance ISO 3046.....	kW	95.0
Performance SAE J 1995	hp	128.0
Speed.....	rpm	2,000
Fuel	Diesel	Diesel
Electric equipment.....	V	12
Drive system.....	hydrost.	hydrost.
Drum driven.....	standard	standard

Drums and Tires

Number of pad feet.....		150
Area of one pad foot	sq.in	21.2
Area of pad feet	in	3.9
Tire size.....	23.1-26 12PR	23.1-26 12PR

Brakes

Service brakes.....	hydrost.	hydrost.
Parking brake	hydromec.	hydromec.

Steering

Steering system.....	oscil. artic.	oscil. artic.
Steering method	hydrost.	hydrost.
Steering / oscillating angle +/-.....	deg	35/12

Exciter system

Drive system.....	hydrost.	hydrost.
Frequency.....	vpm	1,800/2,040
Amplitude	in	0.075/0.039
Centrifugal force	lb	53,954/36,419
Centrifugal force	t	24.5/18.5

Capacities

Fuel	gal	66.0
------------	-----	------

Technical modifications reserved. Machines may be shown with options.



PRUS 586 16 010

Single Drum Roller

BW 213 DH-5, BW 213 PDH-5

Fields of application:


Heavy-duty compaction work on thick fill materials. D-series models are suitable for the compaction of hydraulically bound materials, sand, gravel, crushed rock, semi-cohesive soil and rock. PD models are ideally suited for use on heavy cohesive soils with high water content. H-series models have high climbing capabilities and powerful torque-drives.

Standard Equipment

- ☒ BOMAG ECOMODE
- ☒ Warning, information and operation displays with LCD
- ☒ Noise insulation
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Rear axle with twin spring accumulator brakes
- ☒ No-Spin differential lock
- ☒ Warning horn
- ☒ Single lever control for travel and vibration
- ☒ Seat with arm rest and adj. for position and height
- ☒ 2 Scrapers
- ☒ Emergency STOP
- ☒ Back-up alarm
- ☒ Working lights front / rear
- ☒ Double pump system for travel drive (DH/PDH)
- ☒ Tractor tires (PD)
- ☒ Loading mode
- ☒ Sliding window
- ☒ Battery disconnect switch

Optional Equipment

- ☐ ROPS/FOPS cabin with seat belts*
- Sliding window
- ☐ ROPS/FOPS with safety belt
- ☐ Air conditioning
- ☐ Rear camera
- ☐ ECONOMIZER
- ☐ TERRAMETER
- ☐ BOMAG ECOSTOP
- ☐ BOMAG TELEMATIC POWER
- ☐ Pad foot segment kit (DH)
- ☐ Radio (Bluetooth)
- ☐ Indicator and hazard lights
- ☐ BCM 05 Documentation system
- ☐ Special painting
- ☐ Rotary beacon
- ☐ Pre-start cabin heating
- ☐ Comfort package: Adjustable seat and adjustable steering column
- ☐ Intelligent Compaction (IC) interface
- ☐ Blade (DH/PDH)
- ☐ LED Working lights (Cabin)

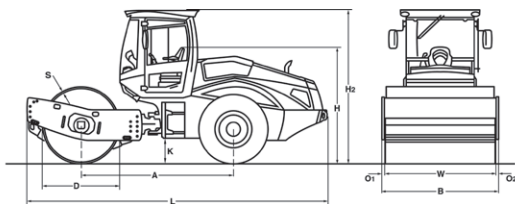

Dimensions in inches

	A	B	D	H	H2	K	L	O1	O2	S	W
BW 213 DH-5	117.1	89.4	59.1	88.6	117.7	19.3	231.1	2.8	2.8	1.18	83.9
BW 213 PDH-5	117.1	89.4	58.3	88.6	117.7	19.3	231.1	2.8	2.8	0.98	83.9

Technical Data

Weights

Gross weight.....	lb
Operating weight CECE w. ROPS-cabin	lb
Axle load, drum CECE	lb
Axle load, wheels CECE.....	lb
Static linear load CECE.....	lb/in

BOMAG

BW 213 DH-5

34,547
28,043
16,667
11,376
198.8

BOMAG

BW 213 PDH-5

32,496
30,490
19,114
11,376
–

Dimensions

Working width.....	in
Track radius, inner	in

83.9
144.9

83.9
144.9

Driving Characteristics

Speed.....	mph
Max. gradeability without/with vibr.....	%

0 - 7.5
60/57

0 - 7.5
62/60

Drive

Engine manufacturer
Type
Emission stage
Exhaust gas aftertreatment.....
Cooling
Number of cylinders.....
Performance ISO 3046.....
Performance SAE J 1995
Speed.....
Fuel.....
Electric equipment.....
Drive system.....
Drum driven.....

Deutz
TCD 4-1
TIER 4f
DOC+DPF+SCR
liquid
4
115.0
155.0
2,100
Diesel
12
hydrost.
standard

Deutz
TCD 4.1
TIER 4f
DOC+DPF+SCR
liquid
4
115.0
155.0
2,100
Diesel
12
hydrost.
standard

Drums and Tires

Number of pad feet.....	
Area of one pad foot	sq.in
Area of pad feet.....	in
Tire size.....	

–
–
–
23.1-26 12PR

150
21.2
3.9
23.1-26 12PR

Brakes

Service brakes.....	
Parking brake	

hydrost.
hydromec.

hydrost.
hydromec.

Steering

Steering system.....	
Steering method	
Steering / oscillating angle +/-.....	deg

oscil. artic.
hydrost.
35/12

oscil. artic.
hydrost.
35/12

Exciter system

Drive system.....
Frequency.....
Amplitude
Centrifugal force
Centrifugal force

hydrost.
1,800/2,040
0.083/0.043
64,071/44,063
29.1/20.0

hydrost.
1,800/2,040
0.067/0.035
64,071/43,613
29.1/19.8

Capacities

Fuel.....	gal
-----------	-----

66.0

66.0

Technical modifications reserved. Machines may be shown with options.

ECONOMIZER

The ECONOMIZER is a compaction measurement system that indicates compaction progress. During the compaction process, progress is indicated by the increase in the number of illuminated LEDs. If the number of LEDs remains constant, no more compaction can be achieved by these machines.

- Prevents unnecessary passes (no overcompaction)
- Saves time and fuel
- Identifies weak spots (no rework)
- Easy to understand (no calibration, no separate on switch)



ECONOMIZER available for all reversible vibratory plates < 300 kg and BMP 8500.

STONEGUARD

Using this unique paving plate, you will achieve unimaginable results in terms of surface coverage, handling and quality. The vulcanized plastic shape improves the smooth running and contact area of the machine.

Advantages:

- Increases working speed by up to 30%
- Prevents paving stone breakage
- Allows vibratory compaction to the very last stone
- Vibratory compaction of large slabs possible



STONEGUARD available for BPR 25/50, BPR 35/60 DE, BPR 50/55 DE, BPR 60/65 DE.

3-2-1 warranty as a standard




IF YOU OFFER HIGH QUALITY, YOU CAN ALSO GIVE EXTENSIVE WARRANTY COVERAGE!

Type	3 years of	2 years of	1 year
BT Tamper	Spring and guide unit	Combustion engine	Standard warranty
BP/BVP Single Direction Vibratory Plates	Exciter gears	Combustion engine	Standard warranty
BPR Reversible Vibratory Plates	Exciter gears + Hydraulic travel lever control	Combustion engine	Standard warranty
BPH Reversible Hydraulic Plates	Exciter gears + Vibration motor/-pump	Combustion engine	Standard warranty
BW Hand-guided Vibratory Rollers	Exciter gears + coupling + Vibration drive	Combustion engine	Standard warranty
BMP Multipurpose Compactor	Exciter gears + Vibration motor/-pump + Drum	Combustion engine	Standard warranty

TOUGH Extended warranty.

NEW OPTIONS: EXTENDED WARRANTIES FOR NEW MACHINES.

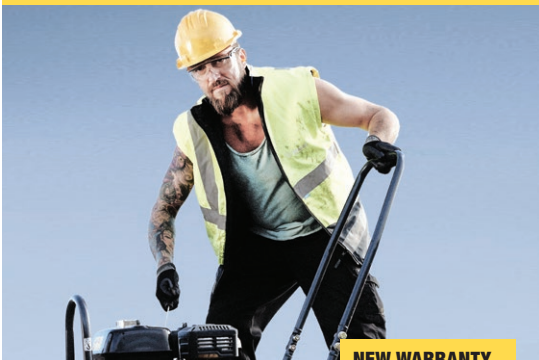

- Parts
- Parts + labor



- Parts
- Parts + labor

NEW WARRANTY OPTIONS:

Now available for the entire Light Equipment range.

Please refer to your BOMAG dealer for pricing and further information

The proven 3-2-1 warranty is still standard.

The BOMAG warranty conditions apply.

Maintenance/Parts Service

Parts for maintenance, service and repair are available from our network of dealers.

- ❑ Protect your investment.
- ❑ Use genuine BOMAG spare parts to keep your machine in tip top condition and avoid unnecessary repairs.
- ❑ We support your equipment with prompt parts availability and faster delivery through our BOMAG dealers.
- ❑ Use the BOMAG Service App to access the parts catalog for your machine and ensure quick identification and ordering of all parts.
 - The BOMAG Service App is available for iPhone and Android phones via the App Store

TOUGH WARRANTY.

AT A GLANCE.

Product	Option	Name	Order-no.
Tamper			
BT and BVT Series	3 YEARS (36 months) Parts	SW 2 TOUGH Warranty 36	54101006
	3 YEARS (36 months) Parts + Labor	SW 7 TOUGH Warranty 36+	54101007
	5 YEARS (60 months) Parts	SW 2 TOUGH Warranty 60	54101008
	5 YEARS (60 months) Parts + Labor	SW 7 TOUGH Warranty 60+	54101009
Single Direction Vibratory Plates			
BVP and BP series	3 YEARS (36 months) Parts	SW 2 TOUGH Warranty 36	54101006
	3 YEARS (36 months) Parts + Labor	SW 7 TOUGH Warranty 36+	54101007
	5 YEARS (60 months) Parts	SW 2 TOUGH Warranty 60	54101008
	5 YEARS (60 months) Parts + Labor	SW 7 TOUGH Warranty 60+	54101009
Reversible Vibratory Plates <300 kg			
BPR 25/40 up to BPR 40/60 DE	3 YEARS (36 months) Parts	SW 2 TOUGH Warranty 36	69201002
	3 YEARS (36 months) Parts + Labor	SW 7 TOUGH Warranty 36+	69201003
	5 YEARS (60 months) Parts	SW 2 TOUGH Warranty 60	69201004
	5 YEARS (60 months) Parts + Labor	SW 7 TOUGH Warranty 60+	69201005
Reversible Vibratory Plates >300 kg			
BPR 45/55 DE up to BPR 100/80 DE	3 YEARS (36 months) Parts	SW 2 TOUGH Warranty 36	69201006
	3 YEARS (36 months) Parts + Labor	SW 7 TOUGH Warranty 36+	69201007
	5 YEARS (60 months) Parts	SW 2 TOUGH Warranty 60	69201008
	5 YEARS (60 months) Parts + Labor	SW 7 TOUGH Warranty 60+	69201009
Reversible Vibratory Plates, remote controlled			
BPH 65/80 S	3 YEARS (36 months) Parts	SW 2 TOUGH Warranty 36	70001000
	3 YEARS (36 months) Parts + Labor	SW 7 TOUGH Warranty 36+	70001001
	5 YEARS (60 months) Parts	SW 2 TOUGH Warranty 60	70001002
	5 YEARS (60 months) Parts + Labor	SW 7 TOUGH Warranty 60+	70001003
Walk-behind Vibratory Rollers			
BW 55 E, BW 71 E-2, BW 65 H, BW 75 H	3 YEARS (36 months) Parts	SW 2 TOUGH Warranty 36	62001000
	3 YEARS (36 months) Parts + Labor	SW 7 TOUGH Warranty 36+	62001001
	5 YEARS (60 months) Parts	SW 2 TOUGH Warranty 60	62001002
	5 YEARS (60 months) Parts + Labor	SW 7 TOUGH Warranty 60+	62001003
Multi-purpose Compactor, remote controlled			
BMP 8500	3 YEARS (36 months) Parts	SW 2 TOUGH Warranty 36	72002709
	3 YEARS (36 months) Parts + Labor	SW 7 TOUGH Warranty 36+	72002710
	5 YEARS (60 months) Parts	SW 2 TOUGH Warranty 60	72002711
	5 YEARS (60 months) Parts + Labor	SW 7 TOUGH Warranty 60+	72002712

Notes on Performance Data

Soil Compaction

For the determination of the performance in earthwork the lift height of the compacted material is of utmost importance. The processed lift height depends mainly on soil type, compaction requirements and the compaction equipment used for the job. The reference values in the following tables are the results of compaction trials and practical applications under normal application related conditions. The required compaction values are thereby reached after for to eight passes.









The tables contain information on the volumetric output of the compaction equipment in earthwork.

Asphalt compaction

In asphalt compaction the number of required passes may vary extremely. It mainly depends on the compactibility of the mixture, the pre-compaction of the paver, the mixture temperature during compaction, the layer thickness as well as the characteristic data of the compactor.








The following table contain mean area and volumetric output data for the compaction equipment.

Guidelines for the non-compacted/compacted layer thickness dependant on soil type and type of compaction equipment*

																																																					
---	--	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	--

APPLICATION TIPS FOR PAVING WORKS

Guidelines for the non-compacted/compacted layer thickness dependant on soil type and type of compaction equipment*

		lb	lb	lb	in:				lb	lb	in:						
					2.5	3-4	> 5				2.5	3-4	> 5				
<ul style="list-style-type: none"> ■ Natural stone (smooth or rough) ■ Concrete blocks and plates ■ Small to medium-sized surfaces 	BVP 10/XX - BP 12/40	≤1,212.5	106.6-182.9		✓	-	-		≤5,620	≤330.7	✓	-	-				<ul style="list-style-type: none"> ■ Concrete blocks ■ Smooth natural stone ■ Large surfaces ■ Non bevelled stones ■ Sensitive surfaces
	BVP 18/45 - BP 25/50	>3,372	182.9-275.6		✓	-	-										
	BPR 25/XX	≤5,620	≤330.7		✓	✓	-										
	BPR 35/XX - BPR 40/60 D	≤7,868	≤507.0		✓	✓	-										
	BPR 45/55 D - BPR 60/60 D	≤13,489	≤1,014.1		-	✓	✓		≤13,489	≤1,014.1	-	-	✓		✓	✓	
	BPR 70/70 D	>14,613	≤1,212.5		-	✓	✓										

* These guidelines are the result of trial compaction and site operations. Compaction specifications can generally be achieved in four to eight passes under normal application conditions.

✓ unsuitable
✓ suitable

Head Office/Hauptsitz:

BOMAG

Hellerwald
56154 Boppard
GERMANY
Tel.: +49 6742 100-0
Fax: +49 6742 3090
e-mail: info@bomag.com

BOMAG

Maschinenhandelsgesellschaft

m.b.H. Klausenweg 654
2534 Alland
AUSTRIA
Tel.: +43 2258 20202
Fax: +43 2258 20202-20
e-mail: austria@bomag.com

BOMAG MARINI EQUIPAMENTOS

LTD.

Rua Comendador Clemente Cifali, 530
Distrito Industrial Ritter
Cachoeirinha – RS
BRAZIL
ZIP code 94935-225
Tel.: +55 51 2125-6677
Fax: +55 51 3470-6220
e-mail: brasil@bomag.com

BOMAG (CANADA), INC.

2233 Argentia Road
East Tower, Suites 302
Mississauga, Ontario L5N 2X7
CANADA
Tel.: +1 800 782 6624
Fax: +1 905 361 9962
e-mail: canada@bomag.com

BOMAG (CHINA)

Compaction Machinery Co. Ltd.

No. 2808 West Huancheng Road
Shanghai ComPRUShensive Industrial
Zone (Fengxian)
Shanghai 201401
CHINA
Tel.: +86 21 33655566
Fax: +86 21 33655508
e-mail: china@bomag.com

BOMA Equipment Hong Kong LTD

Wayson Commercial Building
28 Connaught Road West
Sheung Wan
HONG KONG
Tel: +86-20-8136-1380
Fax: +86-20-8136-1062
e-mail: bomahk@bomag.com

BOMAG FRANCE S.A.S.

2, avenue du Général de Gaulle
91170 Viry-Châtillon
FRANCE
Tel.: +33 1 69578600
Fax: +33 1 69962660
e-mail: france@bomag.com

BOMAG (GREAT BRITAIN), LTD.

Sheldon Way
Larkfield, Aylesford
Kent ME20 6SE
GREAT BRITAIN
Tel.: +44 1622 716611
Fax: +44 1622 710233
e-mail: gb@bomag.com

BOMAG ITALIA Srl.

Via Roma 50
48011 Alfonsine
ITALIA
Tel.: +39 0544 864235
Fax: +39 0544-864367
e-mail: italy@bomag.com

FAYAT BOMAG Polska Sp. z o.o.

Ul. Szyszkowa 52
02-285 Warszawa
POLAND
Tel.: +48 22 482 04 00
Fax: +48 22 482 04 01
e-mail: poland@bomag.com

FAYAT BOMAG RUS OOO

141400, RF, Moscow region
Khimki, Klayazma block, h. 1-g
RUSSIA
Tel: +7 (495) 287 92 90
Fax: +7 (495) 287 92 91
e-mail: russia@bomag.com

BOMAG GmbH

300 Beach Road
The Concourse, #18-06
Singapore 199555
SINGAPORE
Tel.: +65 6 294 1277
Fax: +65 6 294 1377
e-mail: singapore@bomag.com

BOMAG Americas Inc.

125 Blue Granite Parkway
Ridgeway SC 29130
U.S.A.
Tel.: +1 803 337 0700
Fax: +1 803 337 0800
e-mail: usa@bomag.com

