



# DEALER/DISTRIBUTOR PRODUCT CATALOG

COMMERCIAL INDUSTRIAL PRESSURE WASHERS & ACCESSORIES

# Keeping Your World Clean™

At Delco® Cleaning Systems, we're focused on manufacturing the most innovative industrial cleaning products available. With our new state-of-the-art manufacturing facility in Pleasant Prairie, Wisconsin we have expanded our production capabilities to meet our growing demands. At Delco®, we only produce high quality machines using world class engines, pumps, hoses and accessories.

Known for long life and performance, Delco® cleaning machines are innovatively designed for those tough industrial and commercial cleaning jobs. Grease, oil and dirt contaminants stand no chance when emulsified and removed by our hot water machines. Delco® offers you improved cleaning results and a precision cleaning process every time you need them.






# PATRIOT SERIES

With the ability to be portable or stationary, the Patriot is engineered to provide a high quality clean for your needs. This unit features an adjustable thermostat for precision temperature control and a reliable 3400W generator.

## MODEL SPECIFICATIONS

### FEATURES

- HONDA®, or VANGUARD® electric start V-Twin engines
- NEMA 4X electrical enclosure with burner on/off rocker switch, thermostat control and hour meter
- Painted stainless steel cover
- 1/2" Schedule 80 coil
- Isolated pump & engine plate with vibration dampeners
- 120V Burner system
- 3.4 kw Generator with two 120v outlets

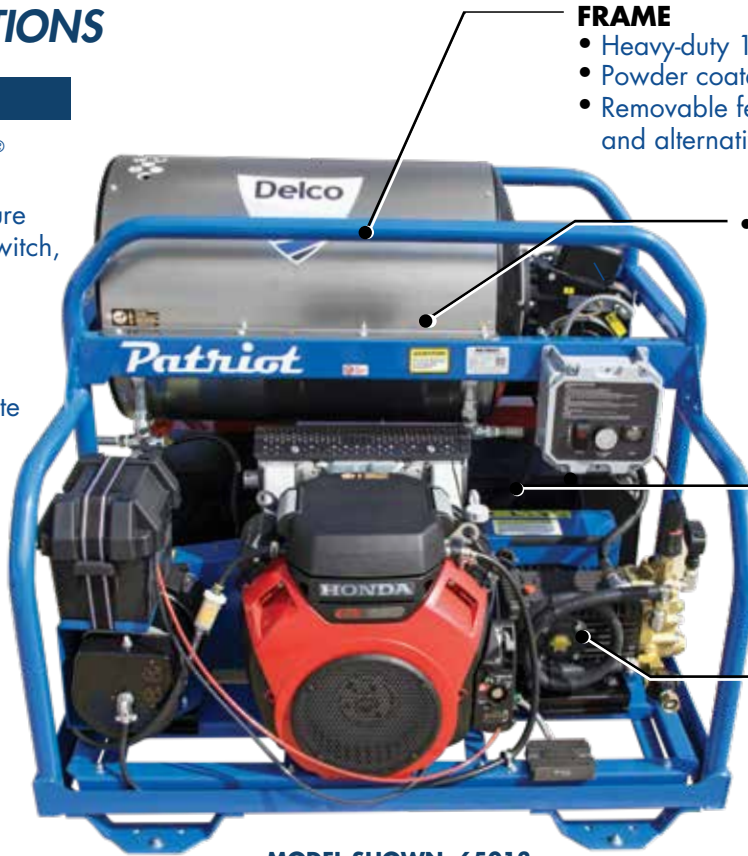

MODEL SHOWN: 65013

### FRAME

- Heavy-duty 1 1/2 round tubular steel design
- Powder coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options

- Horizontal heating coil

- Four, high volume 8.75 gallon fuel tanks
- Total fuel capacity of 35 gallons (17.5 gallon gas) (17.5 gallon diesel)

### PUMP

- Premium industrial triplex pumps; COMET or GENERAL PUMP®
- Belt drive configuration
- Axialign™ adjustment system allows for easy belt adjustment and maintenance to be accomplished with a single bolt adjustment
- Overpressure safety relief valve
- Oversized by pass hose

### INCLUDED ACCESSORIES

- Heat-resistant spray gun (up to 320° F)
- 48" Steel lance with insulated grip and 1/4" QC fitting
- 3/8" x 50' Steel-braided Armor Hose™
- High quality QC nozzles: 15°, 25° and 40°



**\*Optional Accessories (sold separately and available upon order)**

- 7110781- Water-separating diesel fuel filter

### DIMENSIONS

Depth	42"
Width	45"
Height	38"

MODEL #	ENGINE	PUMP	PSI	GPM	ENGINE FUEL	BURNER FUEL	PRODUCT WEIGHT
65011	VANGUARD® 23 hp	COMET	3000	8.0	17.5 gal	17.5 gal	855 lbs
<b>QD</b> 65013	HONDA® GX690	GENERAL PUMP®	3000	8.0	17.5 gal	17.5 gal	856 lbs

**QD** Usually ships within 3 to 5 business days.

POWERED by  
**HONDA**

POWERED by  
**VANGUARD**





# COBALT SERIES

The Cobalt series is equipped with a high-performance pressure washing system driven by a twin cylinder engine, featuring an adjustable thermostat for precision temperature control. Heating of the pressurized water is done effectively with a diesel fired heating system.

## MODEL SPECIFICATIONS

### FEATURES

- HONDA®, or VANGUARD® electric start V-Twin engines
- NEMA 4X electrical enclosure with burner on/off rocker switch, thermostat control, and hour meter
- 1/2" Schedule 80 coil
- Stainless steel coil cover
- Isolated pump & engine plate with vibration dampeners



### FRAME

- Heavy-duty 1 1/2 round tubular steel design
- Powder coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options
- Dual, high volume 8.75 gallon fuel tanks
- Total fuel capacity of 17.5 gallons (8.75 gallon gas) (8.75 gallon diesel)

### INCLUDED ACCESSORIES

- Heat-resistant spray gun (up to 320° F)
- 48" Steel lance with insulated grip and 1/4" QC fitting
- 3/8" x 50' Steel-braided Armor Hose™
- High quality QC nozzles: 15°, 25°, 40° and soap
- Downstream detergent injector



MODEL SHOWN: 65002



### PUMP

- Premium industrial triplex pumps; COMET or GENERAL PUMP®
- Belt drive configuration
- Axialign™ Adjustment System allows for easy belt adjustment and maintenance to be accomplished with a single bolt adjustment
- Overpressure safety relief valve
- Oversized bypass hose

### DIMENSIONS

Depth	42"
Width	46"
Height	38"

- \*Optional Accessories (sold separately and available upon order)**
- 7110781- Water-separating diesel fuel filter
  - 7110782- Float tank

MODEL #	ENGINE	PUMP	PSI	GPM	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
65001	VANGUARD® 570cc	COMET	3500	5.5	8.75 gal	8.75 gal	621 lbs
<b>QD</b> 65002	HONDA® GX630	GENERAL PUMP®	3500	5.5	8.75 gal	8.75 gal	626 lbs
<b>QD</b> 65004	HONDA® GX630	GENERAL PUMP®	4000	5.0	8.75 gal	8.75 gal	665 lbs
65005	VANGUARD® 570cc	COMET	4000	5.0	8.75 gal	8.75 gal	573 lbs
65006	VANGUARD® 570cc	GENERAL PUMP®	3500	5.5	8.75 gal	8.75 gal	573 lbs



**QD** Usually ships within 3 to 5 business days.



# STREAMLINER SERIES

This powerful mobile washing system is designed to be compact enough to fit inside a transit van or truck bed as well as fit through a 36" doorway

## MODEL SPECIFICATIONS

### FEATURES

- HONDA® or VANGUARD® electric start engines
- Burner on/off rocker switch, thermostat control and hour meter
- 1/2" Schedule 80 coil piping
- High temperature safety switch
- Isolated pump & engine plate with vibration dampeners
- 10" Premium heavy-duty tires for easy mobility and vibration dampening
- Wheel brake system



### FRAME

- Heavy-duty 1 1/2 round tubular steel design
- Powder coated for corrosion resistance

- Dual fuel tanks (5.5 gallon gas) (10.0 gallon diesel)

### PUMP

- Premium industrial triplex pumps; COMET or GENERAL PUMP®
- Direct and gear drive configurations
- Overpressure safety relief valve
- Oversized bypass hose

MODEL SHOWN: 65016



**\*Optional Accessories (sold separately and available upon order)**

- 7110781- Water-separating diesel fuel filter
- 7110783- Removable feet

### INCLUDED ACCESSORIES

- Heat-resistant spray gun (up to 320° F)
- 48" Steel lance with insulated grip and 1/4" QC fitting
- 3/8" x 50' Steel-braided Armor Hose™
- High quality QC nozzles: 15°, 25°, 40° and soap
- Downstream detergent injector



### DIMENSIONS

Depth	33"
Width	40"
Height	45"

MODEL #	ENGINE	PUMP	PSI	GPM	DRIVE	ENGINE FUEL	BURNER FUEL	PRODUCT WEIGHT
65016	HONDA® GX390-ES	GENERAL PUMP®	4000	4.0	Gear	5.5 gal	10 gal	500 lbs
65017	VANGUARD® 479cc	COMET	4000	4.0	Gear	5.5 gal	10 gal	500 lbs
65018	HONDA® GX390-ES	COMET	4000	4.0	Direct	5.5 gal	10 gal	500 lbs
65019	VANGUARD® 479cc	COMET	4000	4.0	Direct	5.5 gal	10 gal	500 lbs



Usually ships within 3 to 5 business days.

POWERED by  
**HONDA**

POWERED by  
**VANGUARD**



# ELIMINATOR SERIES

An industrial enclosed cabinet that is designed to be easily serviced. This stationary hot water pressure washer is equipped with a natural gas or LP burner system. A 24V operating system with time delay shut off is standard on all models.

## MODEL SPECIFICATIONS

### FEATURES

- NEMA 4X electrical enclosure with rocker switch, thermostat control, hour meter and soap control switch
- 1/2" Schedule 80 coil
- Soap solenoid with metering valve
- Roll down doors with lock & key plus slide out tray for easy servicing
- Time delay shut down
- Remote box ready wired
- Float tank

### FRAME

- Heavy-duty steel frame
- Powder coated stainless steel enclosures
- Corrosion resistant vented panels



### PUMP

- Premium industrial triplex pump
- Belt drive configuration
- Axialign™ Adjustment System allows for easy belt adjustment and maintenance to be accomplished with a single bolt adjustment
- Overpressure safety relief valve
- Oversized bypass hose

MODEL SHOWN: 65030

### INCLUDED ACCESSORIES

- Heat-resistant spray gun (up to 320° F)
- 48" Steel lance with insulated grip and 1/4" QC fitting
- 3/8" x 50' Steel-braided Armor Hose™
- High quality QC nozzles: 15°, 25°, 40°



### DIMENSIONS

Depth	30"
Width	50"
Height	53"

### \*Optional Accessories (sold separately and available upon order)



- 7110238 - Draft diverter
- 7110785 - Auto start/stop shut off
- 7109483 - Wired NEMA 4X remote operating station



Usually ships within 3 to 5 business days.



# ELIMINATOR SERIES

MODEL #	PUMP	MOTOR	FUEL TYPE	PSI	GPM	PRODUCT WEIGHT
65030	COMET	230V, 1Ø	Natural Gas	2000	4.0	767 lbs
 65031	COMET	230V, 3Ø	Natural Gas	2000	4.0	804 lbs
 65032	COMET	460V, 3Ø	Natural Gas	2000	4.0	806 lbs
65033	COMET	230V, 1Ø	Liquid Propane	2000	4.0	770 lbs
65034	COMET	230V, 3Ø	Liquid Propane	2000	4.0	773 lbs
65035	COMET	460V, 3Ø	Liquid Propane	2000	4.0	806 lbs
65036	COMET	230V, 1Ø	Natural Gas	3000	4.0	794 lbs
65037	COMET	230V, 3Ø	Natural Gas	3000	4.0	794 lbs
65038	COMET	460V, 3Ø	Natural Gas	3000	4.0	804 lbs
65039	COMET	230V, 1Ø	Liquid Propane	3000	4.0	814 lbs
65040	COMET	230V, 3Ø	Liquid Propane	3000	4.0	820 lbs
65041	COMET	460V, 3Ø	Liquid Propane	3000	4.0	806 lbs
65042	COMET	230V, 1Ø	Natural Gas	3000	5.0	799 lbs
 65043	COMET	230V, 3Ø	Natural Gas	3000	5.0	760 lbs
 65044	COMET	460V, 3Ø	Natural Gas	3000	5.0	810 lbs
65045	COMET	230V, 1Ø	Liquid Propane	3000	5.0	820 lbs
65046	COMET	230V, 3Ø	Liquid Propane	3000	5.0	800 lbs
65047	COMET	460V, 3Ø	Liquid Propane	3000	5.0	816 lbs
 65048	COMET	230V, 3Ø	Natural Gas	3000	8.0	760 lbs
 65049	COMET	460V, 3Ø	Natural Gas	3000	8.0	760 lbs
65050	COMET	230V, 3Ø	Liquid Propane	3000	8.0	814 lbs
65051	COMET	460V, 3Ø	Liquid Propane	3000	8.0	820 lbs





# VERSA SERIES

The Versa series is available in powder coated or stainless steel frames, making it a reliable choice for most cleaning equipment needs. The high quality and exceptional design make this horizontal coil electric cleaning system the best in class.

## MODEL SPECIFICATIONS

### FEATURES

- NEMA 4X electrical enclosure with burner on/off rocker switch, thermostat control and hour meter
- Large capacity diesel fuel tank
- Horizontal heat exchanger with stainless steel housing
- Stainless steel float tank
- Steerable pull handle
- 13" Premium heavy-duty tires for easy mobility and vibration dampening
- Wheel brake system

### INCLUDED ACCESSORIES

- Heat-resistant spray gun ( up to 320° F )
- 48" Steel lance with insulated grip and 1/4" QC fitting
- 3/8" x 50' Steel-braided Armor Hose™
- High quality QC nozzles 15°, 25°, 40°



### FRAME

#### Versa

- Heavy-duty 1 1/2 round tubular steel design
- Powder coated for corrosion resistance

#### Versa SS

- All stainless steel frame and panels



### PUMP

- Premium COMET industrial triplex pump
- Belt drive configuration
- Overpressure safety relief valve

MODELS SHOWN: 65071 & 65076

### DIMENSIONS

Depth	31"
Width	61"
Height	40"

### \*Optional Accessories (sold separately and available upon order)

- 7110781 - Water separating diesel filter
- 7110785 - Auto start/stop shut off

MODEL #	DESCRIPTION	PSI	GPM	PUMP	DRIVE	VOLTAGE	DIESEL TANK	PRODUCT WEIGHT
65070	VERSA 3040	3000	4.0	COMET	Belt	230V 1Ø	8.75 gal	654 lbs
<b>QD</b> 65071	VERSA 2040	2000	4.0	COMET	Belt	230V 1Ø	8.75 gal	679 lbs
65072	VERSA 1030	1000	3.0	COMET	Belt	120V 1Ø	8.75 gal	567 lbs
65079	VERSA 1030	1000	3.0	COMET	Belt	230V 1Ø	8.75 gal	656 lbs
65073 (operates at 300°F)	VERSA SUPER STEAMER	250	2.5	COMET	Belt	120V 1Ø	8.75 gal	600 lbs

MODEL #	DESCRIPTION	PSI	GPM	PUMP	DRIVE	VOLTAGE	DIESEL TANK	PRODUCT WEIGHT
65074	VERSA SS 3040	3000	4.0	COMET	Belt	230V 3Ø	8.75 gal	650 lbs
<b>QD</b> 65075	VERSA SS 3040	3000	4.0	COMET	Belt	230V 1Ø	8.75 gal	638 lbs
65076	VERSA SS 2030	2000	4.0	COMET	Belt	230V 1Ø	8.75 gal	586 lbs
65077	VERSA SS 1030	1000	3.0	COMET	Belt	120V 1Ø	8.75 gal	516 lbs
65083	VERSA SS 1030	1000	3.0	COMET	Belt	230V 1Ø	8.75 gal	656 lbs
65078 (operates at 300°F)	VERSA SS SUPER STEAMER	250	2.5	COMET	Belt	120V 1Ø	8.75 gal	600 lbs



Usually ships within 3 to 5 business days.





# EQUALIZER SERIES

The Equalizer series is available in gas or electric models to cater to a variety of cleaning applications. This full featured vertical coil pressure washing system is equipped with a wide four-wheel stance to optimize mobility or versatility.

## MODEL SPECIFICATIONS

### FEATURES

- NEMA 4X electrical enclosure with burner on/off rocker switch, thermostat control, and hour meter
- Large capacity diesel fuel tank (8.75 gallon)
- Horizontal heat exchanger
- Stainless steel float tank (electric models)
- 13" Premium heavy-duty tires for easy mobility and vibration dampening
- 35' GFCI electrical cord

### INCLUDED ACCESSORIES

- Heat-resistant spray gun (up to 320° F)
- 48" Steel lance with insulated grip and 1/4" QC fitting
- 3/8" x 50' Steel-braided Armor Hose™
- High quality QC nozzles: 15°, 25°, 40° and soap
- Adjustable soap control (electric models)



### PUMP

- Premium COMET or GENERAL PUMP® industrial triplex pumps
- Direct or belt drive configurations



MODEL SHOWN: 65063



MODEL SHOWN: 65068

### FRAME

- Heavy-duty 1½ round tubular steel design
- Powder coated for corrosion resistance

### DIMENSIONS

Depth	35"
Width	30"
Height	43"

### \*Optional Accessories (sold separately and available upon order)

- 7110781 - Water separating diesel filter
- 7112623 - Chemical injector kit (gas models)

MODEL #	DESCRIPTION	PSI	GPM	PUMP	DRIVE	VOLTAGE/ PHASE	PRODUCT WEIGHT
65060	EQUALIZER 1030	1000	3.0	COMET	Direct	120V 1Ø	479 lbs
65061	EQUALIZER 1030	1000	3.0	COMET	Direct	230V 1Ø	509 lbs
<b>QD</b> 65063	EQUALIZER 2040	2000	4.0	COMET	Belt	230V 1Ø	510 lbs

MODEL #	DESCRIPTION	PSI	GPM	PUMP	DRIVE	VOLTAGE/ PHASE	PRODUCT WEIGHT
65062	EQUALIZER 2040	2000	4.0	COMET	Direct	230V 1Ø	526 lbs
65064	EQUALIZER 2040	2000	4.0	COMET	Belt	230V 3Ø	526 lbs

MODEL #	DESCRIPTION	PSI	GPM	PUMP	DRIVE	ENGINE	PRODUCT WEIGHT
<b>QD</b> 65068	EQUALIZER 3040HC	3000	4.0	COMET	Direct	HONDA® GX390	485 lbs
65069	EQUALIZER 3040HG	3000	4.0	GENERAL PUMP®	Direct	HONDA® GX390	474 lbs



# DOMINATOR SERIES

Designed to be compact and user friendly, the Dominator boasts high quality components and exceptional value. This horizontal coil electric hot water pressure washer is equipped with features such as downstream chemical injection for extra pump protection.

## MODEL SPECIFICATIONS

### FEATURES

- NEMA 4X electrical enclosure with rocker switch, thermostat control, and hour meter
- Large capacity diesel fuel tank
- Gun and hose holders
- 35' GFCI electrical cord
- 13" Premium heavy-duty tires for easy mobility
- Wheel Brake system



### FRAME

- Heavy-duty 1 1/2 round tubular steel design
- Powder coated for corrosion resistance

### PUMP

- Premium COMET industrial triplex pump
- Direct drive

MODEL SHOWN: 65081

### INCLUDED ACCESSORIES

- Heat-resistant spray gun (up to 320° F)
- 48" Steel lance with insulated grip and 1/4" QC fitting
- 3/8" x 50' Steel-braided Armor Hose™
- High quality QC nozzles 15°, 25°, 40° and soap
- Downstream detergent injector




### DIMENSIONS

Depth	31"
Width	55"
Height	40"

\* Optional Accessories (sold separately and available upon order)

- 7110781 - Water separating diesel filter

MODEL #	MOTOR	PUMP	PSI	GPM	DIESEL TANK	PRODUCT WEIGHT
 65080	120V 1Ø	COMET	1000	3.0	8.75 gal	437 lbs
65081	230V 1Ø	COMET	2000	4.0	8.75 gal	418 lbs



Usually ships within 3 to 5 business days.



# CWE PORTABLE SERIES

Delco® CWE Portable Series is electric powered, enclosed cabinet style cold water washers. All models feature belt-drive premium triplex plunger pumps with high temperature seals for accepting water up to 160° F.

## MODEL SPECIFICATIONS

### FEATURES

- Automatic start/stop feature
- Built-in hour meter
- 13" Premium rear tires with heavy-duty front casters
- Compact frame for easy storage
- Belt driven slow speed industrial triplex pump
- High temperature, water feed capable up to 160° F
- Handle and wheels are removable

### INCLUDED ACCESSORIES

- Heat-resistant spray gun (up to 320° F)
- 48" Steel lance with insulated grip and 1/4" QC fitting
- 3/8" x 50' Steel-braided Armor Hose™
- High quality QC nozzles 15°, 25°, 40° and soap
- Downstream detergent injector



### FRAME

- Compact frame for easy storage
- Steel powder coated frame for corrosion resistance
- Optional stainless steel frame available

### COVER

- Steel powdered coated panel cover
- Optional Stainless Steel panel cover available

MODEL SHOWN: 60322

### DIMENSIONS

Depth	35"
Width	31"
Height	36"

MODEL #	DESCRIPTION	PSI	GPM	PUMP	DRIVE	VOLTAGE/PHASE	PRODUCT WEIGHT
60322	DC 2040	2000	4.0	COMET	Belt	230V 1Ø	321 lbs
60324	DC 3050	3000	4.8	COMET	Belt	230V/460 3Ø	371 lbs





# MOBILE TRAILER SERIES

Delco® Mobile Trailer series pressure washing systems are self-contained cleaning machines. These portable Mobile Trailers are engineered to utilize the power of Delco® machines to bring solutions to job-sites where water supply is limited.


## MODEL SPECIFICATIONS

### FEATURES

- 1- 200' High pressure hose reel with 100' high pressure hose
- 1-200' Supply hose reel with 90' supply hose
- Translucent polyethylene water supply tank with easy to read water level indicators
- Jack with swivel wheel for easy maneuvering
- 3500 lb axle with leaf spring suspension for a smooth ride
- Electric brakes system

✓ **CUSTOM SUPERIOR CRAFTSMANSHIP**

✓ **THICK WALL RECTANGULAR STEEL TUBING**

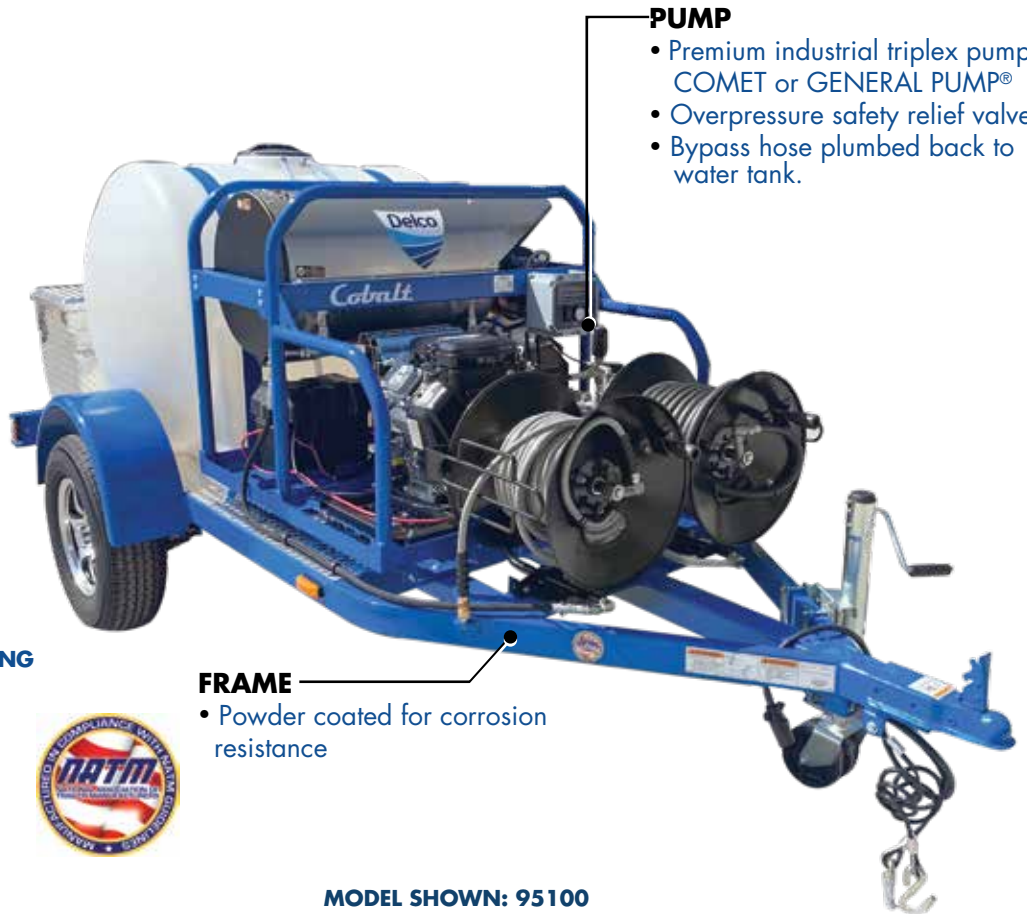

### PUMP

- Premium industrial triplex pumps; COMET or GENERAL PUMP®
- Overpressure safety relief valve
- Bypass hose plumbed back to water tank.

### FRAME

- Powder coated for corrosion resistance



**MODEL SHOWN: 95100**

### INCLUDED ACCESSORIES

- Heat-resistant spray gun (up to 320° F)
- 48" Steel lance with insulated grip and 1/4" QC fitting
- High quality QC nozzles 15°, 25°, 40° and soap
- Downstream detergent injector



\* Optional Accessories (sold separately and available upon order)

- 7110781 - Water separating fuel filter

### DIMENSIONS

Depth	156"
Width	68"
Height	62"





# MOBILE TRAILER SERIES

	MODEL #				
	95100 <sup>1</sup>	95101 <sup>1</sup>	95103 <sup>1</sup>	95104 <sup>1</sup>	95107 <sup>1</sup>
<b>PSI</b>	3500	3500	4000	4000	3500
<b>GPM</b>	5.5	5.5	5.0	5.0	5.5
<b>ENGINE</b>	VANGUARD® 570cc	HONDA® GX630	HONDA® GX630	VANGUARD® 570cc	VANGUARD® 570cc
<b>PUMP</b>	COMET	GENERAL PUMP®	GENERAL PUMP®	COMET	COMET
<b>FRAME</b>	Powder Coated Box Steel	Powder Coated Box Steel	Powder Coated Box Steel	Powder Coated Box Steel	Powder Coated Box Steel
<b>AXLE</b>	3500 lb Rated Single	3500 lb Rated Single	3500 lb Rated Single	3500 lb Rated Single	4500 lb Rated Double
<b>WHEELS</b>	14" w/ 6-Ply Tire	14" w/ 6-Ply Tire	14" w/ 6-Ply Tire	14" w/ 6-Ply Tire	16" w/ 6-Ply Tire
<b>LIGHTING</b>	LED	LED	LED	LED	LED
<b>COUPLING</b>	2" Ball Coupling	2" Ball Coupling	2" Ball Coupling	2" Ball Coupling	2" Ball Coupling
<b>WATER TANK SIZE</b>	225 gal w/ Steel Straps and Drain Petcock	225 gal w/ Steel Straps and Drain Petcock	225 gal w/ Steel Straps and Drain Petcock	225 gal w/ Steel Straps and Drain Petcock	525 gal w/ Steel Straps and Drain Petcock
<b>TOOLBOX</b>	Yes	Yes	Yes	Yes	Yes
<b>HIGH PRESSURE HOSE</b>	3/8" x 100' Armor Hose™	3/8" x 100' Armor Hose™	3/8" x 100' Armor Hose™	3/8" x 100' Armor Hose™	3/8" x 100' Armor Hose™
<b>HIGH PRESSURE HOSE REEL</b>	200'	200'	200'	200'	200'
<b>SUPPLY HOSE</b>	5/8" x 90'	5/8" x 90'	5/8" x 90'	5/8" x 90'	5/8" x 90'
<b>SUPPLY HOSE REEL</b>	200'	200'	200'	200'	200'
<b>PRODUCT WEIGHT</b>	1560 lbs	1560 lbs	1560 lbs	1560 lbs	2460 lbs

<sup>1</sup>For product availability and lead times, please contact [sales@delco-cleaning.com](mailto:sales@delco-cleaning.com)



# HIGH PERFORMANCE HOSES

## STEEL-BRAIDED MONSTER HOSE SERIES



<b>PART NUMBER</b>	<b>41113</b>	<b>41028 (41071)</b>	<b>41030</b>
<b>MAX PRESSURE</b>	4500 PSI	4500 PSI	4500 PSI
<b>ID x LENGTH</b>	3/8" x 25'	3/8" x 50'	3/8" x 100'
<b>MAX TEMP</b>	140° F	140° F	140° F
<b>INNER MATERIAL</b>	Polyester & Steel-braided	Polyester & Steel-braided	Polyester & Steel-braided
<b>OUTER MATERIAL</b>	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
<b>QC FITTINGS</b>	QC Socket & Plug	QC Socket & Plug	QC Socket & Plug
<b>TERMINATED</b>	Solid MNPT x Solid MNPT	Solid QC Socket & Plug	Solid MNPT x Swivel MNPT

<b>PART NUMBER</b>	<b>41032</b>	<b>41034</b>
<b>MAX PRESSURE</b>	4500 PSI	4500 PSI
<b>ID x LENGTH</b>	3/8" x 150'	3/8" x 200'
<b>MAX TEMP</b>	140° F	140° F
<b>INNER MATERIAL</b>	Polyester & Steel-braided	Polyester & Steel-braided
<b>OUTER MATERIAL</b>	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 6" Bend Protectors
<b>QC FITTINGS</b>	QC Socket & Plug	QC Socket & Plug
<b>TERMINATED</b>	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT

## ARMOR HOSE™ SERIES



<b>PART NUMBER</b>	<b>41114 (41095)</b>	<b>41096</b>	<b>41115</b>
<b>MAX PRESSURE</b>	4500 PSI	4500 PSI	4500 PSI
<b>ID x LENGTH</b>	3/8" x 50'	3/8" x 100'	3/8" x 200'
<b>MAX TEMP</b>	250° F	250° F	250° F
<b>INNER MATERIAL</b>	Polyester & Steel-braided	Polyester & Steel-braided	Polyester & Steel-braided
<b>OUTER MATERIAL</b>	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
<b>QC FITTINGS</b>	QC Socket & Plug	QC Socket & Plug	QC Socket & Plug
<b>TERMINATED</b>	Solid MNPT x Swivel FNPT	Solid MNPT x Swivel FNPT	Solid MNPT x Swivel FNPT

## WRAPPED RUBBER HOSE SERIES



<b>PART NUMBER</b>	<b>41183</b>	<b>41184</b>	<b>41185</b>
<b>MAX PRESSURE</b>	4500 PSI	8000 PSI	8000 PSI
<b>ID x LENGTH</b>	3/8" x 50'	3/8" x 50'	3/8" x 100'
<b>MAX TEMP</b>	250° F	250° F	250° F
<b>INNER MATERIAL</b>	R1 Steel-braided	R2 Steel-braided	R2 Steel-braided
<b>OUTER MATERIAL</b>	Wrapped Rubber w/ 6" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
<b>QC FITTINGS</b>	Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug
<b>TERMINATED</b>	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT





# HIGH PERFORMANCE HOSES

## WRAPPED RUBBER HOSE SERIES CONTINUED



PART NUMBER	41186	41187	41188
MAX PRESSURE	8000 PSI	10,000 PSI	10,000 PSI
ID x LENGTH	3/8" x 200'	3/8" x 50'	3/8" x 100'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	R2 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
QC FITTINGS	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug
TERMINATED	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT

PART NUMBER	41189	41190	41191	41192
MAX PRESSURE	10,000 PSI	10,000 PSI	10,000 PSI	10,000 PSI
ID x LENGTH	3/8" x 200'	1/2" x 50'	1/2" x 100'	1/2" x 200'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	R2 Steel-braided	R2 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
QC FITTINGS	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug
TERMINATED	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT

## JETXTREME™ JETTER HOSE SERIES



PART NUMBER	30120	30121	30122
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI
ID x LENGTH	3/8" x 50'	3/8" x 75'	3/8" x 100'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30123	30124	30125	30170
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI	3000 PSI
ID x LENGTH	3/8" x 150'	3/8" x 200'	3/8" x 300'	1/4" x 25'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30171	30172	30173	30174
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4" x 50'	1/4" x 100'	1/4" x 150'	1/4" x 200'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT



# HIGH PERFORMANCE HOSES & PREMIUM ACCESSORIES

## JETXTREME™ JETTER HOSE SERIES (CONT.)



PART NUMBER	30175	30176	30200
MAX PRESSURE	3000 PSI	3000 PSI	4000 PSI
ID x LENGTH	1/4" x 250'	1/4" x 300'	1/2" x 50'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30201	30202	30203	30204
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI	4000 PSI
ID x LENGTH	1/2" x 75'	1/2" x 100'	1/2" x 150'	1/2" x 200'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30205	30206
MAX PRESSURE	4000 PSI	4000 PSI
ID x LENGTH	1/2" x 5'	1/2" x 400'
MAX TEMP	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

## HOT WATER SPRAY GUN



PART NUMBER	80178
MAX PRESSURE	5075 PSI
MAX GPM	12.0 GPM
MAX TEMP	212° F
INLET-HOSE CONNECTION	3/8" FNPT with adapters*
OUTLET- HOSE CONNECTION	1/4" FNPT

## 48" INSULATED LANCE



PART NUMBER	80179
MAX PRESSURE	5000 PSI
MAX GPM	N/A
MAX TEMP	212° F
INLET-HOSE CONNECTION	1/4" MNPT
OUTLET- HOSE CONNECTION	1/4" QC coupler

## SET OF 5 SPRAY NOZZLES: 0°, 15°, 25°, 40° AND SOAP



PART NUMBER	80145	80145
MAX PRESSURE	3600 PSI	4500 PSI
MAX TEMP	212° F	212° F
NOZZLE SIZE	3.0, SOAP	4.0, SOAP
LANCE CONNECT	1/4" QC plug	1/4" QC plug

## SET OF 2 SECOND STORY NOZZLES: WASH AND SOAP



PART NUMBER	80177
MAX PRESSURE	5000 PSI
MAX TEMP	212° F
NOZZLE SIZE	10.0, 40.0
LANCE CONNECT	1/4" QC plug



# PREMIUM ACCESSORIES

## OSCILLATING TURBO NOZZLES



PART NUMBER	<b>80143</b>	<b>80144</b>	<b>80355</b>	<b>80356</b>	<b>80357</b>	<b>80358</b>
MAX PRESSURE	3600 PSI	4500 PSI	5500 PSI	5500 PSI	5500 PSI	5500 PSI
MAX TEMP	212° F	212° F	212° F	212° F	212° F	212° F
NOZZLE SIZE	3.0	4.0	5.0	6.0	7.0	8.0
LANCE CONNECT	1/4" QC plug	1/4" QC plug	1/4" QC plug	1/4" QC plug	1/4" QC plug	1/4" QC plug

## HOSE REELS



PART NUMBER	<b>80399</b>	<b>80403</b>
MAX PRESSURE	5000 PSI	5000 PSI
MAX TEMP	212° F	212° F
HOSE CAPACITY	3/8" x 100'	3/8" x 200'
MATERIAL	Heavy-duty steel construction	Heavy-duty steel construction

## PORTABLE HOSE REELS



PART NUMBER	<b>80401</b>
MAX PRESSURE	5000 PSI
MAX TEMP	212° F
HOSE CAPACITY	3/8" x 100' or 1/4" x 125'
MATERIAL	Heavy-duty steel construction

## 20" COMMERCIAL SURFACE CLEANER



PART NUMBER	<b>80182</b>
MAX PRESSURE	4500 PSI
MAX TEMP	212° F
LANCE CONNECT	3/8" Plug
MATERIAL	Heavy-duty ABS
FILTER	High pressure inlet





# WARRANTY INFORMATION

All **FNA Group** pressure washers are warranted by **FNA Group** to the original purchaser to be free from defects in materials and workmanship, under normal use, for the periods specified below. This limited warranty is subject to the exclusions shown below, applies to the original components only and is calculated from the date of the original purchase. Any parts replaced under this warranty will assume the remainder of the part's original warranty period. These warranties pass through to the original purchaser only and are nontransferable. To find the nearest Authorized Service Center (ASC) contact the customer service group: for **Cold Water** service (877-362-4271) and for **Hot Water** service (844-375-7577). **The customer is responsible to maintain and provide a copy of the purchase receipt to the Authorized Service Center at the time of repair to prove warranty status.**



Industrial Frame/Handle Assemblies (Welded Steel or Aluminum) Powershot, Delco® Equipment



Electric Pump/Motor Assemblies



GENERAL PUMP® Belt/Direct Drive Pumps  
\* Pumps evaluated by GENERAL PUMPS®



Delco® Engines SIMPSON® Generators, Burner Assembly Components



COMET Belt/Direct Drive Pumps  
\*Pumps evaluated by COMET®



Coils, Coil Tanks, Fuel/Float Tanks, Belt Guards



HONDA® Engine  
\* See engine manufacturer for details



Electrical Components, Switches, Contractors, Overload relays, Transformers, PC Boards, Control Modules



KOHLER® Engine  
\*See engine manufacturer for details



Accessory Items: Nozzles, Hoses, Guns, Wands/Lances, Injectors, Unloader Valves, Hose Reels, Foamer, GFCI's, Relief Valves, Filters, Wheels, Tires, Surface Cleaners, Soap Tanks, Plastic Bonnet Assemblies



VANGUARD® Engine  
\*See engine manufacturer for details

## WARRANTY PROVIDED BY OTHER MANUFACTURERS:

Electric Motors and Gasoline or Diesel engines, which are warranted by their respective manufacturers, are serviced through these manufacturers' local authorized service centers. FNA GROUP is not authorized and has no responsibility to provide warranty service for such components.

This warranty does not cover the following items:

1. Normal wear items, such as, seals, o-rings, packing's, pistons, pump valve assemblies, strainers, belts, brushes, fuses, filters, fans or gaskets.
2. Damage or malfunctions resulting from accidents, abuse, modifications, alterations, incorrect installation, improper servicing, failure to follow manufacturer's maintenance instructions, or use of the equipment beyond its stated usage specifications as contained in the operator's manual.
3. Damage due to freezing, chemical deterioration, scale build up, rust, corrosion, water quality or thermal expansion.
4. Damage to components from fluctuations in electrical or water supply.
5. Normal maintenance service, including adjustments, fuel system cleaning, and clearing of obstructions.
6. Travel expenses or shipping costs of machines or components for the purposes of repair or replacement of equipment.
7. The Manufacturer's warranty obligation is limited to repair or replacement of defective components as provided herein and the Manufacturer shall not be liable for any further loss, damages, or expenses – including damages from shipping, accident, abuse, acts of God, misuse, water quality or neglect. Neither is damage from repairs using non-OEM parts or alterations performed by non-factory authorized personnel nor failure to install and operate equipment according to the guidelines put forth in the instruction manual shall void warranty.

## LIMITATION OF LIABILITY

FNA Group's liability for special, incidental, or consequential damages is expressly disclaimed. In no event shall FNA Group's liability exceed the purchase price of the product in question. FNA GROUP makes every effort to ensure that all illustrations and specifications are correct, however, these do not imply a warranty that the product is merchantable or fit for a particular purpose, or that the product will actually conform to the illustrations and specifications. Our obligation under this warranty is expressly limited at our option to the replacement or repair at a service facility or factory designated by us, of such part or parts as inspection shall disclose to have been defective. THE WARRANTY CONTAINED HEREIN IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE are expressly limited to the duration of this written warranty. FNA GROUP does not authorize any other party, to make any representation or promise on behalf of FNA GROUP, or to modify the terms, conditions, or limitations in any way. It is the buyer's responsibility to ensure that the installation and use of products conforms to local codes. While FNA GROUP attempts to assure that its products meet national codes; it cannot be responsible for how the customer chooses to use or install the product. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply.





# MAINTENANCE SCHEDULE

Your Delco® pressure washing system has been built with the highest quality materials and craftsmanship, as the owner you have certain responsibilities for the correct care of the equipment. Attention to regular preventative maintenance procedures will assist in preserving the performance of your equipment. Contact your local service provider for maintenance. A small investment in preventative maintenance will add many hours to the life of your pressure washer. Perform maintenance more often under severe conditions. Do not spray high-pressure water onto the machine. **Not all maintenance items apply to all machines.**

## MAINTENANCE SCHEDULE\*\*

ENGINE OIL	INSPECT	Daily
	CHANGE	After the first 10 hrs then every 50 hrs especially in high ambient temperatures
	REPLACE FILTER	Every 100 hrs
AIR CLEANER	INSPECT FILTER	Every 25 hrs
	CLEAN FILTER	Every 3 months
DIESEL ENGINE COOLANT		Check daily (max of 50% antifreeze)
BATTERY LEVEL		Check monthly (12V DC Burner Systems: Replace battery every 2 years)
ENGINE FUEL FILTER		500 hrs or 6 months
SPARK PLUG MAINTENANCE		500 hrs or 6 months
CLEAN FUEL TANK(S)		Annually
REPLACE FUEL LINES		Annually
PUMP OIL	INSPECT	Daily
	CHANGE	After first 25 hrs, then every 3 months or 150 hrs
REPLACE BURNER FUEL FILTER		Every 6 months (more often if fuel quality is poor)
REMOVE BURNER SOOT		Annually
BURNER ADJUSTMENT/CLEANING		Annually
DE-SCALE COIL		Annually (more often if required)
REPLACE SPRAY NOZZLE		Every 6 months
REPLACE QUICK CONNECTS		Annually (more often if required)
CLEAN WATER SCREEN/FILTER		Weekly
CLEAN FLOAT/SUPPLY TANK		Every 6 months
REPLACE HP HOSE		Annually (more often if required)
BELTS	TIGHTEN	Every 6 months
	INSPECT/REPLACE	Annually
TRAILER TIRES/BEARINGS		Monthly (check tires for condition, tighten lug nuts, grease & check bearings)

## Contact Us

SALES INQUIRIES - [sales@delco-cleaning.com](mailto:sales@delco-cleaning.com)

PRODUCT SUPPORT - [product-support@delco-cleaning.com](mailto:product-support@delco-cleaning.com)

MARKETING INQUIRIES - [marketing@delco-cleaning.com](mailto:marketing@delco-cleaning.com)

SERVICE SUPPORT - [service@delco-cleaning.com](mailto:service@delco-cleaning.com)

