

ULTRA BUGGY® 2500T



2,500 lbs. carrying capacity

Easy access to common service areas

Reinforced tracks for maximum durability

The tracked Ultra Buggy represents the ultimate in productivity, jobsite efficiency and ROI.

- Easy access to common service areas.
- The traction controls are easy to learn, effortless to operate, smooth and responsive.
- Large fuel tank capacity allows for all day productivity.





ULTRA BUGGY 2500








The wheeled Ultra Buggy offers versatility and flexibility to any task. It's compact size and maneuverability allows you to dump material in tough to reach areas. With additional features such as:

- Optional fold-up operator platform provides more maneuverability in tight places.
- Fully hydraulic dump system makes unloading smooth and effortless.
- Patented oversized brake pedal is easy to locate and use for comfortable operation.



180 degree continuous dump radius



Built on the trusted tracked Ultra Buggy frame, the swivel buggy gives you a 180 degree dump radius, plus:

- Dump and swivel switches mounted and linked to the traction controls give users easy access.
- The same 2,500 lbs. carrying capacity that customers have come to expect.

ULTRA BUGGY e2500




Toro's electric Ultra Buggy is the next evolution in material handling. Electric power eliminates engine exhaust emissions, and the thick, polyethylene tub handles all types of material.

- Toro designed HyperCell™ Lithium-Ion battery system is optimized to deliver up to 8-hour continuous runtime.
- The 31.5" width of this machine allows easy access through 3-ft doors.
- Designed and tested to achieve a 2,500 lbs. carrying capacity with a single wheel configuration.







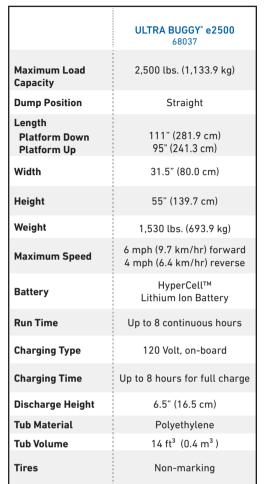





| | ULTRA BUGGY 2500T & ULTRA BUGGY 2500TS 68141 & 68138 | ULTRA BUGGY 2500 68037 |
|--|--|--|
| Maximum Load Capacity | 2,500 lbs. (1,133.9 kg) | 2,500 lbs. (1,133.9 kg) with double wheel 1,875 lbs. (850.4 kg) with single wheel |
| Dump Position | Straight/Swivel | Straight |
| Length Platfrom Down Platform up | 109.5" (278.1 cm) 95" (241.3 cm) | 111" (281.9 cm) 95" (241.3) |
| Width | 35.5" (90.2 cm) | 46 (116.8 cm) with double wheel 33.75" (85.7 cm) with single wheel |
| Height | 51.25" (130.2 cm) | 45" (114.3 cm) |
| Weight | 1,886 lbs. (855.5 kg) | 1,370 lbs. (621.4 kg) |
| Maximum Speed | 6 mph (9.7 km/hr) forward 3 mph (4.8 km/hr) reverse | 7 mph (11.3 km/hr) forward & reverse |
| Engine | 25hp Kohler® Confidant | Honda® GX390 |
| Fuel Tank | 10 Gallons (37.8 L) | 7 Gallons (26.5 L) |
| Discharge Height | 12.75" (32.4 cm) | 6.5" (16.5 cm) |
| Tub Material | Polyethelyne | Polyethelyne |
| Tub Volume | 16 ft³ (0.45 m³) | 16 ft ³ (0.45 m ³) |
| Tracks/Tires | Rugged armid corde | Quick-Disconnect Foam-Filled |
| | | |

STEEL TUB ACCESSORY designed for all Ultra Buggy models

The steel tub is sold as an optional accessory to replace the standard poly tub.

- The steel tub offers the same 14 -cubic foot and 2,500-pound carrying capacity found on the full line of Material Buggies.
- The curved back allows the tub to dump material at any point along the 180-degree radius when used on the Ultra Buggy 2500TS model.







facebook.com/toro.company



twitter.com/TheToroCompany



instagram.com/thetorocompany



youtube.com/toro

toro.com / toro.ca

490-0910 ©2023 The Toro Company, Bloomington, MN 55420 All rights reserved. Printed in the USA.