



Driven by **PERFORMANCE™**

2024 EQUIPMENT CATALOG



**PRESSURE WASHERS | MOBILE TRAILERS | GENERATORS & INVERTERS
AIR COMPRESSORS | TRASH PUMPS | CRX® ENGINES | ACCESSORIES**

POWERING YOUR WORLD SINCE 1961™

With a legacy spanning over six decades, SIMPSON® has been synonymous with delivering effective solutions. Our commitment to quality, innovation, reliability, and performance has positioned us as a leader in the industry. Each product is a testament to our more than sixty years of unmatched experience, making SIMPSON the go-to choice worldwide.

FNA® GROUP MISSION STATEMENT

FNA Group aspires to deliver unsurpassed quality products and customer service driven through operational excellence and the dedication of our valued associates.





COLD WATER PRESSURE WASHERS PG 4

- ELECTRIC SERIES
- POWERSHOT® SERIES
- POWERSHOT® ALUMINUM SERIES
- WATER BLASTER® SERIES
- WATER BLASTER® ALUMINUM SERIES
- WATER SHOTGUN® SERIES
- INDUSTRIAL SERIES
- RENTAL SERIES
- SUPER PRO ROLL CAGE SERIES
- TRUCK MOUNT SERIES

HOT WATER PRESSURE WASHERS PG 15

- BRUTE SERIES

MOBILE TRAILERS PG 18

- MOBILE TRAILERS - COLD WATER
- MOBILE TRAILERS - HOT WATER

GENERATORS & INVERTERS PG 22

- PREMIUM PORTABLE GENERATORS & INVERTERS

PORTABLE WATER PUMPS PG 27

- TRASH PUMP SERIES

ACCESSORIES PG 28

- HIGH PERFORMANCE HOSES
- PREMIUM ACCESSORIES
- PROFESSIONAL CLEANING SOLUTIONS
- PRESSURE WASHER PUMP KITS

CRX® ENGINES PG 32

- CRX® ENGINES
- POWERBOOST® TECHNOLOGY

DELCO® PRESSURE WASHERS PG 35

- PATRIOT SERIES
- COBALT SERIES
- STREAMLINER SERIES
- ELIMINATOR SERIES
- VERSA SERIES
- EQUALIZER SERIES
- DOMINATOR SERIES
- CWE PORTABLE SERIES
- MOBILE TRAILER SERIES

ELECTRIC

PROFESSIONAL

The SIMPSON® ELECTRIC Series is perfect for the “Do-it-Yourself” looking for maximum performance. Simple to use and great for cleaning decks, patios, outdoor furniture, siding, and prepping home exteriors for painting. Its compact design is lightweight and small enough to be easily transported by one person.

UNIT INCLUDES

- Hose
- Lance
- Rear load spray gun
- Nozzles: 15°, 25°, 40° and Soap
- Engine oil 10W-30
- Detergent siphon hose

LIMITED WARRANTY

61129, 61094, 61130, 61314, 61131, 61315, 61132, 61316
5yr Frame, 5yr Pump, 1yr Motor



MODEL #	PART #	PRESSURE	FLOW	MOTOR	PUMP	SPRAY LANCE	FRAME	HOSE	TIRES
IS1520012A ◊	61129	1500 PSI	2.0 GPM	1.5HP 120V 1Ø 13A	AAA® Direct	16"	Steel	3/8" x 25' QC, Monster	N/A
RENTAL									
IR1520012A ◊	61094	1500 PSI	2.0 GPM	1.5HP 120V 1Ø 13A	AAA® Direct	16"	Steel	3/8" x 25' QC, Monster	8" Premium Never-Flats
IR2030012B ◊	61130	2000 PSI	3.0 GPM	3HP 230V 1Ø 18.2A	AAA® Direct	36"	Steel	3/8" x 50' QC, Monster	13" Premium Pneumatic
ALIR2030012B ◊	61314	2000 PSI	3.0 GPM	3HP 230V 1Ø 18.2A	AAA® Direct	36"	Aluminum	3/8" x 50' QC, Monster	13" Premium Pneumatic
IR2535012B ◊	61131	2500 PSI	3.5 GPM	5HP 230V 1Ø 24.8A	AAA® Direct	36"	Steel	3/8" x 50' QC, Monster	13" Premium Pneumatic
ALIR2535012B ◊ ¹	61315	2500 PSI	3.5 GPM	5HP 230V 1Ø 24.8A	AAA® Direct	36"	Aluminum	3/8" x 50' QC, Monster	13" Premium Pneumatic
IR3040012B ◊	61132	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 30.6A	AAA® Direct	36"	Steel	3/8" x 50' QC, Monster	13" Premium Pneumatic
ALIR3040012B ◊	61316	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 28.5A	AAA® Direct	36"	Aluminum	3/8" x 50' QC, Monster	13" Premium Pneumatic

PUMPS

AAA® Industrial Triplex Pump

- Forged brass head
- Ceramic coated plunger sleeves
- Thermal relief valve
- Integrated unloader (on 61094)
- External unloader with bypass hose
- Garden hose inlet/QC outlet

FRAME

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

Steel Frame

- Powder-coated finish for durability and corrosion resistance

HOSES

- The Monster hose is a steel-braided kink and abrasion resistant hose, with quick connect fitting and polyurethane outer jacket

TIRES

- Premium never-flat wheels and pneumatic tires for ease of maneuverability across various terrains

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

DIMENSIONS & WEIGHTS

61129	L 18" x W 13" x H 17" 47 lbs.
61094	L 26" x W 22" x H 24" 87 lbs.
61130, 61314	L 48" x W 28.5" x H 26.5" 145 lbs.
61131, 61315	L 48" x W 28.5" x H 26.5" 145 lbs.
61132, 61316	L 48" x W 28.5" x H 26.5" 175 lbs.

◊ - ETL Certified Model

POWERSHOT® SERIES

PROFESSIONAL

The SIMPSON® PowerShot® Series, is robust, reliable, and designed for cleaning professionals. Ideal for contractors specializing in deck cleaning, wood restoration, paint prep, graffiti removal, and professional cleaning services.

UNIT INCLUDES

- Hose
- Lance
- Rear load spray gun
- Nozzles
- Engine oil 10W-30
- Detergent siphon hose

LIMITED WARRANTY

60869	10yr Frame, 5yr Pump, 3yr Engine
60456	10yr Frame, 5yr Pump, 3yr Engine
61041 (60483)	10yr Frame, 5yr Pump, 3yr Engine



60869



POWERED by **CRX** POWERED by **HONDA**



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	SPRAY LANCE	NOZZLES	HOSE	TIRES
PS60869 †	60869	4000 PSI	3.5 GPM	HONDA® GX270*	AAA®	31"	0°, 15°, 25°, 40° and Soap	3/8" x 50' QC, Monster	13" Premium Pneumatic
PS4240 †	60456	4200 PSI	4.0 GPM	HONDA® GX390*	AAA®	31"	0°, 15°, 25°, 40° and Soap	3/8" x 50' QC, Monster	13" Premium Pneumatic
PS61041(-S) †	61041 (60843)	4400 PSI	4.0 GPM	CRX® 420*	AAA®	31"	0°, 15°, 25°, 40° and Soap	3/8" x 50' QC, Monster	13" Premium Pneumatic

PUMPS

AAA® Industrial Triplex Pump

- Forged brass head
- Ceramic coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden hose inlet/QC outlet

FRAME

Steel Frame

- Powder-coated finish for durability and corrosion resistance

HOSES

- The Monster hose is a steel-braided kink and abrasion resistant hose, with quick connect fittings and polyurethane outer jacket

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrains

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420*	420cc	1.6 gal.
HONDA® GX270*	270cc	1.4 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHTS

60869	L 38" x W 23.5" x H 29" 120 lbs.
60456	L 38" x W 23.5" x H 29" 136 lbs.
61041 (60843)	L 38" x W 23.5" x H 29" 138 lbs.

† - ETL Certified Model

† - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

POWERSHOT® ALUMINUM SERIES

PROFESSIONAL

The SIMPSON® Aluminum Series meets cleaning pros' demands with aircraft-grade aluminum frame, lighter than steel. Ideal for contractors specializing in deck cleaning, wood restoration, paint prep, graffiti removal, and professional cleaning services.

UNIT INCLUDES

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Rear load spray gun
- Detergent siphon hose

LIMITED WARRANTY

60735	10yr Frame, 5yr Pump, 3yr Engine
60689	10yr Frame, 5yr Pump, 3yr Engine
60688	10yr Frame, 5yr Pump, 3yr Engine
61252	10yr Frame, 5yr Pump, 3yr Engine



60735



POWERED by **CRX** POWERED by **HONDA**



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	SPRAY LANCE	NOZZLES	HOSE	TIRES
ALH3228-S ¹	60735	3400 PSI	2.5 GPM	HONDA® GX200*	CAT PUMPS®	16"	0°, 15°, 25°, 40° and Soap	3/8" x 25' QC, Monster	10" Premium Pneumatic
ALH3425-S ¹	60689	3600 PSI	2.5 GPM	HONDA® GX200*	AAA®	16"	0°, 15°, 25°, 40° and Soap	5/16" x 35' M22, MorFlex®	10" Premium Pneumatic
ALH4240-S ¹	60688	4200 PSI	4.0 GPM	HONDA® GX390*	CAT PUMPS®	31"	0°, 15°, 25°, 40° and Soap	3/8" x 50' QC, Monster	13" Premium Pneumatic
ALH4440-S ¹	61252	4400 PSI	4.0 GPM	CRX® 420*	CAT PUMPS®	31"	0°, 15°, 25°, 40° and Soap	3/8" x 50' QC, Monster	13" Premium Pneumatic

PUMPS

AAA® Triplex Pump

- Forged brass head
- Ceramic coated plungers
- Thermal relief valve
- Integrated & adjustable w/easy start unloader
- Garden hose inlet/M22 threaded outlet

CAT PUMPS® Triplex

- Thermal relief valve
- Integrated w/easy start unloader
- Garden hose inlet/QC outlet

FRAME

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

HOSES

- The Monster hose is a steel-braided kink and abrasion resistant hose, with quick connect fitting and polyurethane outer jacket
- MorFlex® high-pressure hose is non-marring, flexible and abrasion-resistant

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX®420*	420cc	1.6 gal.
HONDA® GX200*	196cc	0.83 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHTS

60735	L 21" x W 24" x H 34" 81 lbs.
60689	L 21" x W 24" x H 24" 78 lbs.
60688	L 38" x W 23.5" x H 29" 133 lbs.
61252	L 38" x W 23.5" x H 29" 133 lbs.

◇ - ETL Certified Model

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

WATER BLASTER® SERIES

PROFESSIONAL

COLD WATER PRESSURE WASHERS

The SIMPSON® Water Blaster® series is a robust solution for professional cleaners, excelling in tasks such as deck cleaning, wood restoration, paint preparation, and graffiti removal. It ensures optimal performance even in the most challenging environments.

UNIT INCLUDES

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Rear load spray gun
- Detergent siphon hose

LIMITED WARRANTY

60205	10yr Frame, 5yr Pump, 3yr Engine
60824	10yr Frame, 5yr Pump, 3yr Engine



POWERED by **CRX** POWERED by **HONDA**



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	SPRAY LANCE	NOZZLES	HOSE	TIRES
WB4240211 †	60205	4200 PSI	4.0 GPM	HONDA® GX390*	AAA®	48"	0°, 15°, 25°, 40° and Soap	3/8" x 50' QC, Monster	13" Premium Pneumatic
WB4440111 †	60824	4400 PSI	4.0 GPM	CRX® 420*	AAA®	48"	0°, 15°, 25°, 40° and Soap	3/8" x 50' QC, Monster	13" Premium Pneumatic

PUMPS

AAA® Triplex Pump

- Forged brass head
- Ceramic coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden hose inlet/QC outlet

FRAME

Steel Frame

- Powder-coated finish for durability and corrosion resistance

HOSES

- The Monster hose is a steel-braided kink and abrasion resistant hose, with quick connect fitting and polyurethane outer jacket

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420*	420cc	1.6 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHTS

60205	L 46" x W 26" x H 25" 159 lbs.
60824	L 46" x W 26" x H 25" 159 lbs.

† - ETL Certified Model

† - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

WATER BLASTER® ALUMINUM SERIES

INDUSTRIAL

SIMPSON® Water Blaster Aluminum series, crafted from aircraft-grade aluminum, offers durability and lighter weight than steel counterparts. Ideal for professionals in deck cleaning, wood restoration, paint prep, graffiti removal, and various cleaning services. Designed for optimal performance in challenging environments.

UNIT INCLUDES

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Rear load spray gun
- Detergent siphon hose

LIMITED WARRANTY

60827	10yr Frame, 5yr Pump, 3yr Engine
60828	10yr Frame, 5yr Pump, 3yr Engine
60825	10yr Frame, 5yr Pump, 3yr Engine



60828



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	SPRAY LANCE	NOZZLES	HOSE	TIRES
ALWB4240211 ¹	60827	4200 PSI	4.0 GPM	HONDA® GX390*	AAA®	48"	0°, 15°, 25°, 40° and soap	3/8" x 50' QC, Monster	13" Premium Pneumatic
ALWB4240261 ¹	60828	4200 PSI	4.0 GPM	HONDA® GX390*	CAT PUMPS®	48"	0°, 15°, 25°, 40° and soap	3/8" x 50' QC, Monster	13" Premium Pneumatic
ALWB4440111 ¹	60825	4400 PSI	4.0 GPM	CRX® 420*	AAA®	48"	0°, 15°, 25°, 40° and soap	3/8" x 50' QC, Monster	13" Premium Pneumatic

PUMPS

AAA® Triplex Pump

- Forged brass head
- Ceramic coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden hose inlet/QC outlet

CAT PUMP® Triplex

- Slow speed
- Thermal relief valve
- External unloader with bypass hose
- Garden hose inlet/QC outlet

FRAME

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

HOSES

- The Monster hose is a steel-braided kink and abrasion resistant hose, with quick connect fitting and polyurethane outer jacket

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420*	420cc	1.6 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHTS

60827	L 46" x W 26" x H 25" 146 lbs.
60828	L 46" x W 26" x H 25" 146 lbs.
60825	L 44.5" x W 26" x H 25" 143 lbs.

¹ - ETL Certified Model

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

WATER SHOTGUN® SERIES

INDUSTRIAL

COLD WATER PRESSURE WASHERS

The Water Shotgun®, designed for deep cleaning, is ideal for paint preparation, professional cleaning, graffiti removal, industrial sites, and fleet maintenance. Its unique dual-belt system separates the engine and pump, preventing overheating and pump fatigue, thereby enhancing efficiency and extending the lifespan of the engine and pump.

UNIT INCLUDES

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Rear load spray gun
- Detergent siphon hose

LIMITED WARRANTY

61272	10yr Frame, 5yr Pump, 3yr Engine
60243	10yr Frame, 5yr Pump, 3yr Engine



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	SPRAY LANCE	NOZZLES	HOSE	TIRES
WS5050231E ¹	60243	5000 PSI	5.0 GPM	HONDA® GX690* Key-Start	COMET Belt	48"	0°, 15°, 25°, 40° and Soap	3/8" x 50 QC, Wrapper Rubber	13" Premium Pneumatic
WS5050131E ^{1,2}	61272	5000 PSI	5.0 GPM	CRX® 680* Key-Start	COMET Belt	48"	0°, 15°, 25°, 40° and Soap	3/8" x 50 QC, Wrapper Rubber	13" Premium Pneumatic

PUMPS

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External Unloader with bypass hose
- Solid bronze conrod

FRAME

Steel Frame

- Powder-coated finish for durability and corrosion resistance

HOSES

- R2 dual steel-braided hose with wrapped rubber outer jacket and bend protectors

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 680*	678cc	6.0 gal. External
HONDA® GX690*	389cc	6.0 gal. External

DIMENSIONS & WEIGHTS

60243	L 49" x W 29" x H 26.5" 214 lbs.
61272	L 46" x W 29" x H 26.5" 277 lbs



Includes 6 gallon external fuel tank

◊ - ETL Certified Model

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

² - 12V battery not included

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

INDUSTRIAL SERIES

INDUSTRIAL

The SIMPSON® Industrial Series, a valuable addition to the pressure washer lineup, is tailored for construction, rentals, oil fields, heavy-duty paint prep, and large-scale projects. This series ensures reliable and efficient performance, making it an essential tool for these challenging tasks.

UNIT INCLUDES

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Rear load spray gun
- Detergent siphon hose

LIMITED WARRANTY

61024, 61279, 61026 , 61029, 61028,	10yr Frame, 7yr Pump, 3yr Engine
61030	10yr Frame, 5yr Pump, 3yr Engine



61024



POWERED by **CRX** POWERED by **HONDA**



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	SPRAY LANCE	NOZZLES	FRAME	TIRES
IS3030212 ¹	61024	3000 PSI	3.0 GPM	HONDA® GX200*	AAA® Direct	16"	0°, 15°, 25°, 40° and Soap	Aluminum	10" Premium Foam Filled
IS3030112 ¹	61279	3000 PSI	3.0 GPM	CRX® 210*	AAA® Direct	16"	0°, 15°, 25°, 40° and Soap	Aluminum	10" Premium Foam Filled
IS3540212 ¹	61026	3500 PSI	4.0 GPM	HONDA® GX270*	AAA® Direct	31"	0°, 15°, 25°, 40° and Soap	Aluminum	13" Premium Foam Filled
IS4240231 ¹	61030	4200 PSI	4.0 GPM	HONDA® GX390*	COMET Belt	48"	0°, 15°, 25°, 40° and Soap	Aluminum	13" Premium Foam Filled
IS4440112 ¹	61029	4400 PSI	4.0 GPM	CRX® 420*	AAA® Direct	31"	0°, 15°, 25°, 40° and Soap	Aluminum	13" Premium Foam Filled
IS4440212 ¹	61028	4400 PSI	4.0 GPM	HONDA® GX390*	AAA® Direct	31"	0°, 15°, 25°, 40° and Soap	Aluminum	13" Premium Foam Filled

PUMPS

AAA® Industrial Triplex Pump

- Forged brass head
- Ceramic coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden hose inlet/QC outlet

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

HOSES

- The Monster hose is a steel-braided kink and abrasion resistant hose, with quick connect fitting and polyurethane outer jacket
- 3/8" x 50' with QC connections

TIRES

- Premium foam filled tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210*	208cc	1.0 gal.
CRX® 420*	420cc	1.6 gal.
HONDA® GX200*	196cc	0.8 gal.
HONDA® GX270*	270cc	1.4 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHT

61024, 61279	L 20.5" x W 23" x H 32" 83 lbs.
61026	L 23.5" x W 27.5" x H 37" 115 lbs.
61030	L 26" x W 25" x H 44.5" 154 lbs.
61029	L 23.5" x W 27.5" x H 37" 128 lbs.
61028	L 23.5" x W 27.5" x H 37" 126 lbs.

¹ - ETL Certified Model

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

RENTAL SERIES

INDUSTRIAL

COLD WATER PRESSURE WASHERS

The SIMPSON® Rental Series comes standard with an hour meter, robust water inlet filter, dual braided high-pressure hose with QC fittings, and clear set-up & use instructions on the steel dashboards. Trust in its added durability, courtesy of the heavy-duty aluminum frames.

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40° and Soap
- Lance
- Engine oil 10W-30
- Rear load spray gun
- Detergent siphon hose

LIMITED WARRANTY

All Units 10yr Frame, 7yr Pump, 3yr Engine



61096



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	SPRAY LANCE	FRAME	HOSE	TIRES
IR2544211 ¹	61380	2500 PSI	4.4 GPM	HONDA® GX270*	AAA® GAX Belt	48"	Steel	3/8" x 50' QC, Monster	13" Premium Foam Filled
IR2730212 ¹	61143	2700 PSI	3.0 GPM	HONDA® GX200*	AAA® Direct	36"	Aluminum	3/8" x 50' QC, Monster	10" Premium Foam Filled
IR3030212 ¹	61095	3000 PSI	3.0 GPM	HONDA® GX200*	AAA® Direct	36"	Aluminum	3/8" x 50' QC, Monster	10" Premium Foam Filled
IR3030112 ¹	61282	3000 PSI	3.0 GPM	CRX® 210*	AAA® Direct	36"	Aluminum	3/8" x 50' QC, Monster	10" Premium Foam Filled
IR3030211 ¹	61379	3000 PSI	3.0 GPM	HONDA® GX270*	AAA® Belt	48"	Steel	3/8" x 50' QC, Monster	13" Premium Foam Filled
IR3035211 ¹	61381	3000 PSI	3.5 GPM	HONDA® GX270*	AAA® GAX Belt	48"	Steel	3/8" x 50' QC, Monster	13" Premium Foam Filled
IR3538211 ¹	61382	3500 PSI	3.8 GPM	HONDA® GX390*	AAA® GAX Belt	48"	Steel	3/8" x 50' QC, Monster	13" Premium Foam Filled
IR3540212 ¹	61133	3500 PSI	4.0 GPM	HONDA® GX270*	AAA® Direct	48"	Aluminum	3/8" x 50' QC, Monster	13" Premium Foam Filled
IR4440212 ¹	61096	4400 PSI	4.0 GPM	HONDA® GX390*	AAA® Direct	48"	Aluminum	3/8" x 50' QC, Monster	13" Premium Foam Filled
IR4440112 ¹	61134	4400 PSI	4.0 GPM	CRX® 420*	AAA® Direct	48"	Aluminum	3/8" x 50' QC, Monster	13" Premium Foam Filled

PUMPS

AAA® Industrial Triplex Pump

- Forged brass head
- Ceramic coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden hose inlet/QC outlet

AAA® GAX Industrial Triplex Pump

- 1750 RPM slow speed
- High efficiency
- Forged brass manifold
- Dual oil drain ports
- Thermal shock resistant ceramic plunger sleeves
- External unloader with bypass hose
- Thermal relief valve
- Garden hose inlet/QC outlet

FRAME

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

Steel Frame

- Powder-coated finish for durability and corrosion resistance

HOSES

- The Monster hose is a steel-braided kink and abrasion resistant hose, with quick connect fitting and polyurethane outer jacket

TIRES

- Premium foam filled tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINES	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210*	208cc	0.7 gal.
CRX® 420*	420cc	1.6 gal.
HONDA® GX200*	196cc	0.8 gal.
HONDA® GX270*	270cc	1.4 gal.
HONDA® GX390*	389cc	1.6 gal.

DIMENSIONS & WEIGHT

61143	L 29.5" x W 26.75" x H 38.75" 95 lbs.
61095, 61282	L 48" x W 40" x H 23.25" 213 lbs.
61133, 61134	L 48" x W 40" x H 23.25" 132 lbs.
61096	L 48" x W 40" x H 23.25" 139 lbs.
61379	L 46" x W 27" x H 24" 145 lbs.
61380, 61381	L 51" x W 26" x H 24" 163 lbs.
61382	L 51" x W 26" x H 24" 176 lbs.

◊ - ETL Certified Model

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

SUPER PRO ROLL CAGE SERIES

INDUSTRIAL

Designed for resilience on tough job sites, the SIMPSON® Super Pro Roll Cage machines feature high-quality pumps and engines encased in protective four-wheeled roll cages. These machines ensure stability and facilitate easy transportation across rugged terrains.

UNIT INCLUDES

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Rear load spray gun
- Detergent siphon hose

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



SRC4060143E



POWERED by **CRX** POWERED by **HONDA**



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	DRIVE	SPRAY LANCE	NOZZLES	HOSE	TIRES
SMALL										
SRC3625212 ◊¹	65200	3600 PSI	2.5 GPM	HONDA® GX270*	AAA®	DIRECT	36"	0°, 15°, 25°, 40° and soap	5/16" x 25' QC, Monster	10" Premium Pneumatic
SRC3625112 ¹	65202	3600 PSI	2.5 GPM	CRX® 210*	AAA®	DIRECT	36"	0°, 15°, 25°, 40° and soap	5/16" x 25' QC, Monster	10" Premium Pneumatic
MEDIUM										
SRC4035212 ◊¹	65203	4000 PSI	3.5 GPM	HONDA® GX270*	AAA®	DIRECT	48"	0°, 15°, 25°, 40° and soap	3/8" x 50' QC, Monster	10" Premium Pneumatic
SRC4240211 ◊¹	65209	4200 PSI	4.0 GPM	HONDA® GX390*	AAA®	BELT	48"	0°, 15°, 25°, 40° and soap	3/8" x 50' QC, Monster	10" Premium Pneumatic
SRC4440212 ◊¹	65206	4400 PSI	4.0 GPM	HONDA® GX390*	AAA®	DIRECT	48"	0°, 15°, 25°, 40° and soap	3/8" x 50' QC, Monster	10" Premium Pneumatic
SRC4440112 ◊¹	65208	4400 PSI	4.0 GPM	CRX® 420*	AAA®	DIRECT	48"	0°, 15°, 25°, 40° and soap	3/8" x 50' QC, Monster	10" Premium Pneumatic
SRC4440111 ◊¹	65211	4400 PSI	4.0 GPM	CRX® 420*	AAA®	BELT	48"	0°, 15°, 25°, 40° and Soap	3/8" x 50' QC, Monster	10" Premium Pneumatic



For hose reels, see ACCESSORIES on page 30

MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	DRIVE	SPRAY LANCE	NOZZLE	HOSE	TIRES
SRC3080243E ◊***	65217	3000 PSI	8.0 GPM	HONDA® GX690*	UDOR®	GEAR	48"	0°, 15°, 25°, and 40°	3/8" x 50' QC, Wrapped Rubber	13" Premium Pneumatic
SRC3080143E 1**	65236	3000 PSI	8.0 GPM	CRX® 680*	UDOR®	GEAR	48"	0°, 15°, 25°, and 40°	3/8" x 50' QC, Wrapped Rubber	13" Premium Pneumatic
SRC4060143E ◊***	65219	4000 PSI	6.0 GPM	CRX® 680*	UDOR®	GEAR	48"	15°, 25°, 40° and Soap	3/8" x 50' QC, Wrapped Rubber	13" Premium Pneumatic
SRC5040141E	65291	5000 PSI	4.0 GPM	CRX® 750*	UDOR®	BELT	48"	MEG: 15°, 25°, 40°	3/8" x 50' NPT, Wrapped Rubber	13" Premium Foam Filled
SRC5050243E ◊***	65227	5000 PSI	5.0 GPM	HONDA® GX690*	UDOR®	GEAR	48"	MEG: 15°, 25°, 40° and Soap	3/8" x 50' NPT Wrapped Rubber	13" Premium Pneumatic
SRC5050133E 1**	65232	5000 PSI	5.0 GPM	CRX® 680*	COMET	GEAR	48"	MEG: 15°, 25°, 40° and Soap	3/8" x 50' NPT, Wrapped Rubber	13" Premium Pneumatic
SRC5050143E 1**	65238	5000 PSI	5.0 GPM	CRX® 680*	UDOR®	GEAR	48"	MEG: 15°, 25°, 40° and Soap	3/8" x 50' NPT Wrapped Rubber	13" Premium Pneumatic
SRC7040133E 1**	65231	7000 PSI	4.0 GPM	CRX® 750*	COMET	GEAR	48"	MEG: 15°, 25°, 40°	3/8" x 50' NPT, Wrapped Rubber	13" Premium Pneumatic

PUMPS

AAA® Industrial Triplex Pump

- Forged brass head
- Ceramic coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden hose inlet/QC outlet

UDOR® Industrial Triplex Pump

- Forged brass head
- Thermal relief valve
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex Pump

- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External Unloader with bypass hose

FRAME

Steel Frame

- Powder-coated finish for durability and corrosion resistance

HOSES

- The Monster hose is a steel-braided kink and abrasion resistant hose with quick connect fitting and polyurethane outer jacket
- Wrapped Rubber hoses are dual-braided with 24-inch bend protectors

TIRES

- Premium pneumatic or foam filled tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications
- Meg nozzles with 1/4" MNPT connection (only on units 5000 PSI and above)

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210*	208cc	0.7 gal.
CRX® 275*	272cc	0.8 gal.
CRX® 420*	420cc	1.6 gal.
CRX® 680*	679cc	External
CRX® 750*	750cc	External
HONDA® GX200*	196cc	0.8 gal.
HONDA® GX270*	270cc	1.4 gal.
HONDA® GX390*	389cc	1.6 gal.
HONDA® GX690*	688cc	4.9 gal.

DIMENSIONS & WEIGHT

65200	L 31" x W 24.25" x H 28.25" 150 lbs.
65202	L 31" x W 26.1" x H 30" 150 lbs.
65203	L 38" x W 27.5" x H 33" 165 lbs.
65206	L 43" x W 28" x H 35" 179 lbs.
65208	L 38" x W 27.5" x H 33" 182 lbs.
65209	L 38" x W 27.5" x H 33" 194 lbs.
65211	L 38" x W 27.5" x H 33" 182 lb
65217, 65236	L 48"x W 40" x H 23.25" 139 lbs.
65219	L 46"x W 30" x H 40" 370 lbs.
65227, 65232, 65238	L 46"x W 30" x H 40" 381 lbs.
65231	L 46" x W 30" x H 40" 400 lbs.
65291	L 46" x W 30" x H 40" 365 lbs.

◊ - ETL Certified Model

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 23 for additional information.

** - Battery not included. Requires 12V garden tractor battery type U1

TRUCK MOUNT SERIES

INDUSTRIAL

Experience the ease of mobility with Simpson®'s truck-mounted pressure washers. Designed for ultimate portability, these units can be effortlessly transported to any job site. They provide a comprehensive cleaning solution that merges power with convenience. With Simpson's pressure washers, your work becomes simpler, more efficient, and you're always prepared for any task!

UNIT INCLUDES

- Nozzles

LIMITED WARRANTY

All Units 10yr Frame, 7yr Pump, 3yr Engine

OPTIONAL ACCESSORY

(sold separately and available upon order)

PART #	DESCRIPTION
80294	Splitter Kit for use with 65251 and 65252 • 6 nozzles: (2) 15°, (2) 25° and (2) 40° • Attachable nozzle holder bracket • Plumbing hardware for two hose discharge conversion
80295	Splitter Kit for use with 65253 and 65254 • 6 nozzles: (2) 15°, (2) 25° and (2) 40° • Attachable nozzle holder bracket • Plumbing hardware for two hose discharge conversion



65254



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	DRIVE	NOZZLES	PRODUCT WEIGHT
TM2810141E ¹	65253	2800 PSI	10.0 GPM	CRX® 750* w/Key-Start	UDOR®	Belt	15°, 25° and 40°	199 lbs.
TM2810241E ¹	65254	2800 PSI	10.0 GPM	HONDA® GX690* w/Key-Start	UDOR®	Belt	15°, 25° and 40°	208 lbs.
TM3080141E ¹	65251	3000 PSI	8.0 GPM	CRX® 680* w/Key-Start	UDOR®	Belt	15°, 25° and 40°	199 lbs.
TM3080241E ¹	65252	3000 PSI	8.0 GPM	HONDA® GX690 w/Key-Start	UDOR®	Belt	15°, 25° and 40°	208 lbs.

PUMPS

UDOR® Industrial Triplex Pump

- 1750 RPM slow speed
- Forged brass head
- Thermal relief valve
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

Aircraft-Grade Aluminum Frame

- Light weight and corrosion resistant

ENGINES

ENGINE	DISPLACEMENT
CRX® 680*	679cc
HONDA® GX690*	688cc

DIMENSIONS

All Units L 25" x W 38" x H 18"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

BRUTE SERIES

INDUSTRIAL

Removing heavy grease, oil, salt, and algae can be a tough job but SIMPSON®'s hot water line is up to the task. With sizes ranging from the Mini Brute to the Mega Brute, there's a SIMPSON hot-water machine ready to take on the toughest jobs no matter how big or small.

UNIT INCLUDES

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Spray gun
- Detergent siphon hose

LIMITED WARRANTY

60363	10yr Frame, 5yr Pump, 1yr Motor
65132, 65133, 65106, 65105,	10yr Frame, 5yr Pump, 3yr Engine
65108, 65129	10yr Frame, 7yr Pump, 3yr Engine



65132



60363

POWERED by CRX POWERED by HONDA



MODEL #	PART #	PRESSURE	FLOW	ENGINE/MOTOR	PUMP	ENGINE FUEL CAPACITY	BURNER FUEL CAPACITY	DRIVE	START	TIRES
---------	--------	----------	------	--------------	------	----------------------	----------------------	-------	-------	-------

MINI BRUTE

MB1518012A ¹	60363	1000 PSI	1.8 GPM	120V Electric	AAA®	N/A	4.0 gal. Diesel	Direct	Electric	13" Premium Pneumatic
-------------------------	-------	----------	---------	---------------	------	-----	-----------------	--------	----------	-----------------------

KING BRUTE

KB4040112E ^{1**}	65132	4000 PSI	4.0 GPM	CRX® 420*	AAA®	1.6 gal. Gasoline	5.0 gal. Diesel	Direct	Recoil/Key-Start	13" Premium Pneumatic
KB4040252E ^{1**}	65133	4000 PSI	4.0 GPM	HONDA® GX390*	General Pump®	1.6 gal. Gasoline	5.0 gal. Diesel	Direct	Recoil/Key-Start	13" Premium Pneumatic

BIG BRUTE

BB4040332E ^{1**}	65105	4000 PSI	4.0 GPM	VANGUARD® 479cc*	COMET	5.0 gal. Gasoline	10.0 gal. Diesel	Direct	Key-Start	10" Premium Pneumatic
BB4040232E ^{1**}	65106	4000 PSI	4.0 GPM	HONDA® GX390*	COMET	5.0 gal. Gasoline	10.0 gal. Diesel	Direct	Recoil/Key-Start	10" Premium Pneumatic
BB4040343E ^{1**}	65108	4000 PSI	4.0 GPM	VANGUARD® 479cc*	UDOR®	5.0 gal. Gasoline	10.0 gal. Diesel	Gear	Key-Start	10" Premium Pneumatic
BB4040132E ^{1**}	65129	4000 PSI	4.0 GPM	CRX® 420*	COMET	5.0 gal. Gasoline	7.5 gal. Diesel	Direct	Recoil/Key-Start	10" Premium Pneumatic

PUMPS

AAA® Industrial Triplex Pump

- Forged brass head
- Ceramic coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden hose inlet/QC outlet

General Pump® Industrial Triplex

- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex

- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

UDOR® Industrial Triplex Pump

- Forged brass head
- Thermal relief valve
- Heat-resistant solid ceramic plungers operating on lubricated packings
- External unloader with bypass hose

FRAME

Steel Frame

- Powder-coated finish for durability and corrosion resistance

HOSES

- 3/8" x 50' steel-braided Armor Hose™

TIRES

- Premium pneumatic tires for ease of maneuverability across various terrain

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

DIMENSIONS & WEIGHT

60363	L 29" x W 34" x H 40" 277 lbs.
65132	L 42" x W 28" x H 47.5" 375 lbs.
65133	L 42" x W 28" x H 47.5" 375 lbs.
65105	L 41.75" x W 31.125" x H 45.25" 520 lbs.
65106	L 41.75" x W 31.125" x H 45.25" 514 lbs.
65108	L 41.75" x W 31.125" x H 45.25" 535 lbs.
65129	L 41.75" x W 31.125" x H 45.25" 580 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

** - Battery not included. Requires 12V garden tractor battery type U1

BRUTE SERIES


INDUSTRIAL

UNIT INCLUDES

- Hose
- Nozzles
- Lance
- Engine oil 10W-30
- Spray gun
- Detergent siphon hose

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine

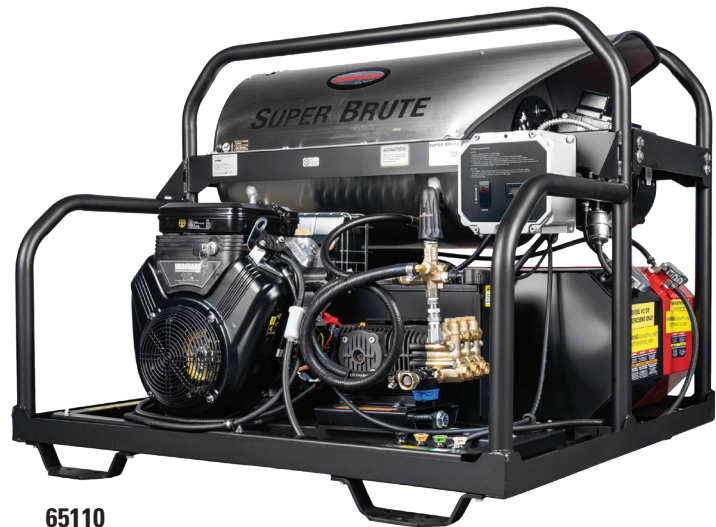

POWERED by CRX POWERED by HONDA



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	ENGINE FUEL CAPACITY	BURNER FUEL CAPACITY	DRIVE	START
SUPER BRUTE SERIES									
SB3555331E ^{1**}	65110	3500 PSI	5.5 GPM	VANGUARD® 570cc*	COMET	7.5 gal. Gasoline	7.5 gal. Diesel	Belt	Key-Start
SB3555251E ^{1**}	65123	3500 PSI	5.5 GPM	HONDA® GX690*	General Pump®	7.5 gal. Gasoline	7.5 gal. Diesel	Belt	Key-Start
SB3555131E ^{1**}	65127	3500 PSI	5.5 GPM	CRX® 680*	COMET	7.5 gal. Gasoline	7.5 gal. Diesel	Belt	Key-Start
SB3555231E ^{1**}	65134	3500 PSI	5.5 GPM	HONDA® GX690*	COMET	7.5 gal. Gasoline	7.5 gal. Diesel	Belt	Key-Start
SB3555151E ^{1**}	65149	3500 PSI	5.5 GPM	CRX® 680*	General Pump®	7.5 gal. Gasoline	7.5 gal. Diesel	Belt	Key-Start
SBD4060441E ^{1**}	65176	4000 PSI	6.0 GPM	KUBOTA® D902 Diesel*	UDOR®	30.0 gal. Diesel - Shared		Belt	Key-Start
SBD4060411E ¹	65279	4000 PSI	6.0 GPM	KUBOTA® D902 Diesel*	AAA® GAX	30.0 gal. Diesel - Shared		Belt	Key-Start

PUMPS

AAA® Industrial Triplex Pump

- 1750 RPM slow speed
- Forged brass head
- Ceramic coated plunger sleeves
- Thermal relief valve
- External unloader with bypass hose
- Garden hose inlet/QC outlet

AAA® GAX Industrial Triplex Pump

- 1750 RPM slow speed
- High efficiency
- Forged brass manifold
- Dual oil drain ports
- Thermal shock resistant ceramic plunger sleeves
- External unloader with bypass hose
- Thermal relief valve
- Garden hose inlet/QC outlet

General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External Unloader with Bypass Hose

UDOR® Industrial Triplex Pump

- 1750 RPM slow speed
- Forged brass head
- Thermal relief valve
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

Steel Frame

- Powder-coated finish for durability and corrosion resistance

HOSES

- 3/8" x 50' steel-braided Armor Hose™

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

DIMENSIONS & WEIGHT

65110	L 41.75" x W 45.25" x H 37.125" 595 lbs.
65123	L 41.75" x W 45.25" x H 37.125" 625 lbs.
65127	L 41.75" x W 45.25" x H 37.125" 639 lbs.
65134	L 41.75" x W 45.25" x H 37.125" 663 lbs.
65149	L 41.75" x W 45.25" x H 37.125" 639 lbs.
65176	L 48" x W 48" x H 45" 1,050 lbs.
65279	L 48" x W 48" x H 45" 1,050 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

** - Battery not included. Requires 12V garden tractor battery type U1

BRUTE SERIES

INDUSTRIAL

HOT WATER PRESSURE WASHERS

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25° and 40°
- Lance
- Engine oil 10W-30
- Spray gun
- Detergent siphon hose

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine



65274



MODEL #	PART #	PRESSURE	FLOW	MOTOR	BTU/HR	FUEL TYPE	PUMP	DRIVE
MEGA BRUTE SERIES								
MB3040011BNG ¹	65270	3000 PSI	4.0 GPM	7.5 HP 230V 1Ø 29A	312,000	Natural Gas	AAA® GAX	Belt
MB3040011BLP ¹	65274	3000 PSI	4.0 GPM	7.5 HP 230V 1Ø 29A	312,000	Liquid Propane	AAA® GAX	Belt
MB3040011GNG ¹	65275	3000 PSI	4.0 GPM	7.5 HP 208V 3Ø 21.4A	312,000	Natural Gas	AAA® GAX	Belt
MB3040011GLP ¹	65276	3000 PSI	4.0 GPM	7.5 HP 208V 3Ø 21.4A	312,000	Liquid Propane	AAA® GAX	Belt

PUMPS

AAA® GAX Industrial Triplex Pump

- 1750 RPM slow speed
- High efficiency
- Forged brass manifold
- Dual oil drain ports
- Thermal shock resistant ceramic plunger sleeves
- External unloader with bypass hose
- Thermal relief valve
- Garden hose inlet/QC outlet

FRAME

Steel Frame

- Powder-coated finish for durability and corrosion resistance

HOSES

- 3/8" x 50' steel-braided Armor Hose™

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

ADDITIONAL SPECS

- Quick connect nozzle tips for use for a variety of cleaning applications

DIMENSIONS & WEIGHT

All Units L 29.5" x W 45" x H 41.25" | 636 lbs.



Control panel and on-board nozzles



Detergent siphon hose, quick connect and garden hose connections

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

COLD WATER

INDUSTRIAL

SIMPSON®'s mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailer, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.

UNIT INCLUDES

- Hose
- Nozzles: 0°, 15°, 25°, 45°, and Soap
- Lance
- Engine oil 10W-30
- Spray gun
- Detergent siphon hose

LIMITED WARRANTY

All Units 1yr Frame, 5yr Pump, 3yr Engine



95000



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	TRAILER SIZE	WATER TANK SIZE	HOSE	TIRES
---------	--------	----------	------	--------	------	--------------	-----------------	------	-------

STAGE 1A COLD WATER

TRSA3228262 ¹	95000	3200 PSI	2.8 GPM	HONDA® GX200*	CAT PUMPS®	8' Overall Length	100 gal.	3/8" x 50' QC, Monster	5.30-12
TRSA3228162 ¹	95129	3200 PSI	2.8 GPM	CRX® 225*	CAT PUMPS®	8' Overall Length	100 gal.	3/8" x 50' QC, Monster	5.30-12

STAGE 1B COLD WATER

TRSB3835262 ¹	95001	3800 PSI	3.5 GPM	HONDA® GX270*	CAT PUMPS®	9' Overall Length	150 gal.	3/8" x 100' QC, Monster	5.30-12
TRSB4240262 ¹	95002	4200 PSI	4.0 GPM	HONDA® GX390*	CAT PUMPS®	9' Overall Length	150 gal.	3/8" x 100' QC, Monster	5.30-12
TRSB4240162 ¹	95130	4200 PSI	4.0 GPM	CRX® 420*	CAT PUMPS®	9' Overall Length	150 gal.	3/8" x 100' QC, Monster	5.30-12
TRSB4240262E ^{1**}	95003	4200 PSI	4.0 GPM	HONDA® GX390* w/Recoil & Key-Start	CAT PUMPS®	9' Overall Length	150 gal.	3/8" x 100' QC, Monster	5.30-12
TRSB4240162E ^{1**}	95134	4200 PSI	4.0 GPM	CRX® 420* w/Recoil & Key-Start	CAT PUMPS®	9' Overall Length	150 gal.	3/8" x 100' QC, Monster	5.30-12
TRSB4240362E ^{1**}	95004	4200 PSI	4.0 GPM	VANGUARD 479cc* w/Key-Start	CAT PUMPS®	9' Overall Length	150 gal.	3/8" x 100' QC, Monster	5.30-12

PUMPS

CAT PUMPS® Industrial Triplex

- Thermal relief valve
- External unloader with bypass hose to tank
- Garden hose inlet/QC outlet

ADDITIONAL SPECS

Trailer Frame

- Rectangular thick wall steel tubing

Axle Rating

- 2000 lbs

Lighting

- LED

Trailer Hitch Ball Size

- 2" Ball

HOSES

- The Monster hose is a steel-braided kink and abrasion resistant hose with quick connect fitting and polyurethane outer jacket
- Sizes:
3/8" x 50' - Stage 1A cold water
3/8" x 100' - Stage 1B cold water
- Hose Reel: 100'

NOZZLES

- Quick connect nozzle tips for use for a variety of cleaning applications

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 225*	224cc	0.7 gal.
CRX® 420*	420cc	1.6 gal.
HONDA® GX200*	196cc	0.8 gal.
HONDA® GX270*	270cc	1.4 gal.
HONDA® GX390*	389cc	1.6 gal.
VANGUARD® 479cc*	479cc	6.5 gal. remote

DIMENSIONS & WEIGHT

95000	L 98" (includes tongue) x W 68" x H 47" 750 lbs.
95129	L 98" (includes tongue) x W 68" x H 47" 750 lbs.
95001	L 106" (includes tongue) x W 65" x H 48" 900 lbs.
95002	L 106" (includes tongue) x W 65" x H 48" 900 lbs.
95130	L 106" (includes tongue) x W 65" x H 48" 900 lbs.
95003	L 106" (includes tongue) x W 65" x H 48" 900 lbs.
95134	L 106" (includes tongue) x W 65" x H 48" 900 lbs.
95004	L 106" (includes tongue) x W 65" x H 48" 1,000 lbs.

LIMITED WARRANTY

All Units 1yr Frame, 5yr Pump, 3yr Engine

OPTIONAL ACCESSORIES

80280 - Fire hose reel kit. Includes a heavy duty hose reel, 50' of 1" rubber fire hose, a 1" fire hose nozzle, mounting hardware and plumbing

80281 - Left-hand manifold kit

Coupling Kits (must choose one)

- **80282** - 2-5/16" adjustable ball coupling kit
- **80283** - 2" adjustable ball coupling kit
- **80285** - Pintle hitch kit



SWT TRAILER SERIES LOW OIL SHUTDOWN

MODEL #	PART #	ENGINE	PUMP	AXLE RATING	TRAILER SIZE	WATER TANK SIZE	BRAKE TYPE	FUEL TANK CAPACITY	TIRE
SWT525172 ¹	95400	CRX® 210*	2" Semi-Trash	4500 lbs. (x2)	13' Overall Length	525 gal.	Electric	0.7 gal.	ST225-75R15
SWT535172HSB ¹	95403	CRX® 210*	2" Semi-Trash	5200 lbs. (x2)	13' Overall Length	535 gal.	Hydraulic	0.7 gal.	ST225-75R15

SPECIAL FEATURES

Water Tank

- Elliptical low profile 3/8-inch thick polyethylene
- 16" manhole with 4-inch vent and sump pump

Central Manifold

- Easy-to-operate butterfly valves

Plumbing

- Break-away hydrant fill with 25" x 2-1/2" hose
- Dual rear spray heads
- Garden hose connector
- Manifold discharge system

Trailer

- NATM approved
- Rectangular thick wall steel tubing
- 13" under-clearance at axle
- 5000 lb. side-mount crank jack
- Dual leaf spring suspension
- LED lighting
- Two safety chains with snap hooks

Semi-Trash Pump

- 2" suction and discharge that handles solids up to 9/16" diameter
- Cast iron impeller and volute
- Silicon carbide mechanical seals
- Die cast aluminum pump housing
- Flow: 158 GPM
- Suction head lift: 25'

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210*	208cc	0.7 gal.

DIMENSIONS & WEIGHT

95000	L 153" (includes tongue) x W 87" x H 84" 2500 lbs.
95403	L 157" (includes tongue) x W 87" x H 84" 2500 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

HOT WATER

INDUSTRIAL

SIMPSON®'s mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailer, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.

UNIT INCLUDES

- Hose
- Lance
- Spray gun
- Nozzles: 15°, 25°, 40° and soap
- Engine oil 10W-30
- Detergent siphon hose

LIMITED WARRANTY

All Units 1yr Frame, 5yr Pump, 3yr Engine



95005



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	TRAILER SIZE	AXLE RATING	WATER TANK SIZE	TIRE SPEC
STAGE 1C HOT WATER <small>LOW OIL SHUTDOWN</small>									
TRSC4040232E ¹	95005	4000 PSI	4.0 GPM	HONDA® GX390* w/Recoil & Key-Start	COMET	9' Overall Length	3500 lbs.	200 gal.	ST175/80R13
TRSC4040332E ¹	95006	4000 PSI	4.0 GPM	VANGUARD® 479cc* w/Recoil & Key-Start	COMET	9' Overall Length	3500 lbs.	200 gal.	ST175/80R13
TRSC4040132E ¹	95016	4000 PSI	4.0 GPM	CRX® 420* w/Recoil & Key-Start	COMET	9' Overall Length	3500 lbs.	200 gal.	ST175/80R13
STAGE 2 HOT WATER <small>LOW OIL SHUTDOWN</small>									
TRS23555251E ¹	95123	3500 PSI	5.5 GPM	HONDA® GX690* w/Key-Start	General Pump®	13' Overall Length	3500 lbs.	225 gal.	ST205/75R14
TRS23555151E ¹	95131	3500 PSI	5.5 GPM	CRX® 680* w/Key-Start	General Pump®	13' Overall Length	3500 lbs.	225 gal.	ST205/75R14
STAGE 3 HOT WATER <small>LOW OIL SHUTDOWN</small>									
TRS33555231E ¹	95122	3500 PSI	5.5 GPM	HONDA® GX690* w/Key-Start	COMET	16' Overall Length	2 x 4500 lbs.	525 gal.	ST235/80R16
TRS33555251E ¹	95124	3500 PSI	5.5 GPM	HONDA® GX690* w/Key-Start	General Pump®	16' Overall Length	2 x 4500 lbs.	525 gal.	ST235/80R16
TRS33555131E ¹	95132	3500 PSI	5.5 GPM	CRX® 680* w/Key-Start	COMET	16' Overall Length	2 x 4500 lbs.	525 gal.	ST235/80R16
TRS33555151E ¹	95138	3500 PSI	5.5 GPM	CRX® 680* w/Key-Start	General Pump®	16' Overall Length	2 x 4500 lbs.	525 gal.	ST235/80R16
MINI BRUTE TRAILER									
MBT4040252E ¹	95014	4000 PSI	4.0 GPM	HONDA® GX390* w/Recoil & Key-Start	General Pump®	10' Overall Length	3500 lbs.	N/A	ST175/80R13
MBT4040152E ¹	95136	4000 PSI	4.0 GPM	CRX® 420* w/Recoil & Key-Start	General Pump®	10' Overall Length	3500 lbs.	N/A	ST175/80R13

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

PUMPS

COMET Industrial Triplex

- 1750 RPM slow speed (Stage 2 and 3)
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose to tank

General Pump® Industrial Triplex

- 1750 RPM slow speed (Stage 2 and 3)
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose to tank

HOSES

Steel-braided Armor Hose™

- Sizes:
 - 3/8" x 50' - **95136, Mini Brute Trailers**
 - 3/8" x 100' - **Stage 1Cs 2s, and 3s trailers**

Supply Hose

- Sizes:
 - 3/8" x 75' **Stage 1C**
 - 3/8" x 90' **Stage 2s, 3s, and Mini Brute Trailers**

High-Pressure Hose Reel

- Sizes:
 - 100' - **Stage 1Cs**
 - 200' - **Stage 2s, 3s; optional for Mini Brute Trailers**
 - N/A - **95400**

ADDITIONAL SPECS

Trailer Frame

- Rectangular thick wall steel tubing

Lighting

- LED

Trailer Hitch Ball Size

- 2" ball for stage 1C, 2 and Mini Brute trailers
- 2-5/16" ball for stage 3 trailers

ADDITIONAL FEATURES

- Stage 2 & 3 equipped with 48" toolbox
- Stage 3 equipped with 16 gal. chemical tank

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
Only for the Stage 1C, 2, and 3 trailers		
CRX® 420*	420cc	7.5 gal. Remote
CRX® 680*	679cc	7.5 gal. Remote
HONDA® GX390*	389cc	7.5 gal. Remote
HONDA® GX690	688cc	7.5 gal. Remote
*VANGUARD 479cc	479cc	7.5 gal. Remote

DIMENSIONS & WEIGHT

95005	L 108" (includes tongue) x W 68" x H 69" 1300 lbs.
95006	L 108" (includes tongue) x W 68" x H 69" 1300 lbs.
95016	L 108" (includes tongue) x W 68" x H 69" 1300 lbs.
95123	L 156" (includes tongue) x W 68" x H 62" 1500 lbs.
95124	L 192" (includes tongue) x W 90" x H 62" 3500 lbs.
95131	L 156" (includes tongue) x W 68" x H 62" 1500 lbs.
95122	L 192" (includes tongue) x W 90" x H 62" 3500 lbs.
95132	L 192" (includes tongue) x W 90" x H 62" 3500 lbs.
95138	L 192" (includes tongue) x W 90" x H 62" 3500 lbs.
95014	L 121" (includes tongue) x W 48" x H 39" 900 lbs.
95136	L 121" (includes tongue) x W 48" x H 39" 900 lbs.



For hose reels, see
ACCESSORIES on page 30



95122



95014

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.
* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

SPG SERIES

PROFESSIONAL

Boasting a larger size, enhanced durability, and the ability to generate a superior power output compared to inverter generators, SIMPSON® Commercial generators are the ideal choice for energizing job sites. They also serve as a reliable source of backup electricity during power outages, ensuring uninterrupted power supply when you need it most.

LIMITED WARRANTY

All Units 3yr Residential, 6m Commercial



70069



MODEL #	PART #	ENGINE	STARTING WATTS	RUNNING WATTS [±]	AC VOLTAGE	AC FREQUENCY	MAIN BREAKER AMPERAGE	VOLTAGE REGULATION	WHEEL	RUN TIME-25% LOAD	dBA-25% LOAD @ 7M ⁺
SPG3645 ¹	70069	CRX® 225*	4500	3600	120V	60 Hz	26A	Automatic	8" Never-flat	10.5 Hours	72-75
SPG5568 ¹	70070	CRX® 420*	6875	5500	120/240V	60 Hz	21A	Automatic	10" Never-flat	9.5 Hours	74-77
SPG7593E ¹	70072	CRX® 420*	9375	7500	120/240V	60 Hz	27A	Automatic	10" Never-flat	9 Hours	74-77
SPG8310E ¹	70073	CRX® 460*	10000	8300	120/240V	60 Hz	30A	Automatic	10" Never-flat	9 Hours	74-77

ADDITIONAL SPECS

All Units

- Low oil shutdown
- GFCI protection

70070

- Equipped with Safe-T-Sense CO monitor

70072, 70073

- Battery not included; uses 12V-14AH battery

ENGINES GENERATOR SPECS LOW OIL SHUTDOWN

MODEL	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
70069	CRX® 225*	224cc	Recoil	3.9 gal. Gasoline
70070	CRX® 420*	420cc	Recoil	6.6 gal. Gasoline
70072	CRX® 420*	420cc	Recoil/Key-Start	6.6 gal. Gasoline
70073	CRX® 460*	439cc	Recoil/Key-Start	6.6 gal. Gasoline

DIMENSIONS & WEIGHT

70069	L 23" x W 18" x H 19" 110 lbs.
70070	L 27" x W 21" x H 23" 174 lbs.
70072	L 27" x W 21" x H 23" 174 lbs.
70073	L 27" x W 21" x H 23" 207 lbs.

GENERATOR PANEL CONFIGURATIONS[±]

70069



70070



70072



70073



¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

[±] - Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators

⁺ - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

SCGH SERIES

INDUSTRIAL

With their impressive size, increased durability, and superior power output that outperforms inverter generators, SIMPSON® Industrial generators are the perfect solution for powering up job sites. They also act as a dependable backup electricity source during power outages, guaranteeing a continuous power supply when it's crucial. Experience the reliability and power of SIMPSON Industrial generators when you need it the most.

LIMITED WARRANTY

All Units 3yr Commercial

SPECIAL FEATURES

- **SCGH3000 ONLY** - Voltage switch
- Heavy-duty welded steel frame with powder-coated finish
- Welded lifting handle
- Premium HONDA® engines
- Lifting hook
- V-mount vibration isolation system
- Auto idle down
- UL listed receptacles
- Weather resistant outlet covers
- Easily accessible control panel
- High-quality 100% copper-wound brushless alternator
- Premium never-flat wheels



70054



MODEL #	PART #	ENGINE	STARTING WATTS	RUNNING WATTS*	AC VOLTAGE	AC FREQUENCY	MAIN BREAKER AMPERAGE	VOLTAGE REGULATION	WHEEL	RUN TIME-25% LOAD	dBa-25% LOAD @ 7M +
SCGH3000 ¹	70082	HONDA® GX200*	3000	2600	120V/240V	60 Hz	10A	Capacitor	9" Never-flat	10 Hours	72
SCGH5500 ¹	70053	HONDA® GX270*	5500	4500	120V/240V	60 Hz	17.5A	Capacitor	9" Never-flat	17 Hours	72
SCGH8500 ¹	70054	HONDA® GX390*	8500	7000	120V/240V	60 Hz	30A	Capacitor	9" Never-flat	12 Hours	74
SCGH8500E ¹	70055	HONDA® GX390*	8500	7000	120/240V	60 Hz	30A	Capacitor	9" Never-flat	12 Hours	74

ADDITIONAL SPECS

All Units

- Low oil shutdown
- GFCI protection
- CSA certified


70055

- 12V battery included

CIRCUIT BREAKERS

70053	70054	70055	70082
(1) 15A Main Circuit Breaker, Double Pole	(1) 30A Main Circuit Breaker, Double Pole	(1) 30A Main Circuit Breaker, Double Pole	(1) 10A Main Circuit Breaker, Double Pole
	(2) 20A Thermal Circuit Breakers, Single Pole	(2) 20A Thermal Circuit Breakers, Single Pole	

70053, 70054, 70055

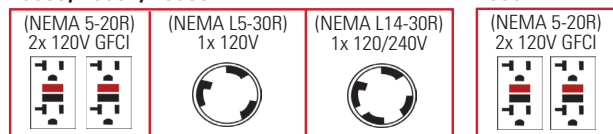

70082

ENGINES

MODEL	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
70082	HONDA® GX200*	196cc	Recoil	3.1 gal.
70053	HONDA® GX270*	270cc	Recoil	7.9 gal.
70054	HONDA® GX390*	389cc	Recoil	7.9 gal.
70055	HONDA® GX390*	389cc	Recoil/Key-Start	7.9 gal.

DIMENSIONS & WEIGHT

70082	L 23" x W 17" x H 17" 95 lbs.
70053	L 30.25" x W 25" x H 27" 151 lbs.
70054	L 30.25" x W 25" x H 27" 175 lbs.
70055	L 30.25" x W 25" x H 27" 182 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.
 * - Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators
 + - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)
 * - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.



70098
(Shown with optional handle included in 80289 kit, sold separately)

POWERED by **HONDA** 

MODEL #	PART#	ENGINE	STARTING WATTS	RUNNING WATTS*	AC VOLTAGE	AC FREQUENCY	MAIN BREAKER AMPERAGE	VOLTAGE REGULATION	RUN TIME-25% LOAD	dBA-25% LOAD @ 7M +
SCGH13000E ¹	70098	HONDA® GX690*	13,000	10,000	120V/240V	60HZ	47A	Capacitor	22.5 Hours	73

ADDITIONAL SPECS

- Low oil shutdown
- GFCI protection
- CSA certified (pending, spring 2024)

MOTORS

MODEL	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
70098	HONDA® GX690	688cc	Key-Start	9.0 gal.

DIMENSIONS & WEIGHT

70098 L 40" x W 25" x H 31" | 400 lbs.





OPTIONAL ACCESSORIES

- **80289** - Handle and wheel kit

CIRCUIT BREAKERS

70053	(1) 47A Main Circuit Breaker, Double Pole	(2) 20A Thermal Circuit Breakers, Single Pole	(3) 30A Thermal Circuit Breakers, Single Pole
--------------	---	---	---

70098

(NEMA 5-20R) 2x 120V GFCI 	(NEMA L5-30R) 1x 120V 	(NEMA L14-30R) 1x 120/240V 	(NEMA 14-50R) 1x 120/240V 
---	--	--	---

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.
[±] - Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators
⁺ - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)
^{*} - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

DEVICE WATTAGES

HEATING & COOLING

DEVICE	STARTING WATTS	RUNNING WATTS
10,000 BTU CENTRAL AC ⁴	3000	1500
24,000 BTU CENTRAL AC ⁴	4950	3800
1/2 HP FURNACE FAN BLOWER ⁴	2300	875
1/2 HP FURNACE FAN BLOWER ⁴	1400	700
HEAT PUMP	4500	4700
13 GAL HUMIDIFIER	-	175
10,000 BTU WINDOW AC	1800	1800
12,000 BTU WINDOW AC	3950	3250

LANDSCAPING

DEVICE	STARTING WATTS	RUNNING WATTS
ELECTRIC HEDGE TRIMMER	-	400
ELECTRIC LAWN MOWER	-	1200
9" ELECTRIC LINE TRIMMER	-	350-500
1/2 HP 12" ELECTRIC CHAIN SAW	-	900-1220

WORK SITE

DEVICE	STARTING WATTS	RUNNING WATTS
ELECTRIC HEDGE TRIMMER	-	400
ELECTRIC LAWN MOWER	-	1200
9" ELECTRIC LINE TRIMMER	-	350-500
1 HP AIR COMPRESSOR	4500	2000
1/2 HP AIR COMPRESSOR	2000	1400
1/3 HP AIRLESS PAINT SPRAYER	1200	600
3" BELT SANDER	2400	1200
8" SANDER	1100	1400
6-1/2" CIRCULAR SAW	2300	800-1000
1/2" HAND DRILL	900	600
3/8" HAND DRILL	600	400
10" MITER SAW/ TABLE SAW	2100	850
QUARTZ HALOGEN WORK LAMP	-	1000
RECIPROCATING SAW	-	960

RECREATIONAL

DEVICE	STARTING WATTS	RUNNING WATTS
AM/FM RADIO	-	100
BLENDER	450	400
20" BOX FAN	-	200
CD/DVD PLAYER	-	100
CELLPHONE BATTERY CHARGER	-	25
COLOR TV	-	200-500
ELECTRIC GRILL	-	1650
INFLATER PUMP	150	50
OUTDOOR LIGHT STRING	-	250
13,500 BTU RV AC	700	1500
SLOW COOKER	-	250

RESIDENTIAL

DEVICE	STARTING WATTS	RUNNING WATTS
COFFEE MAKER	-	1750
ELECTRIC DRYER	1800	5750
ELECTRIC RANGE	-	1500 / ELEMENT
ELECTRIC WATER HEATER	1000	2000
1/2 HP GARAGE DOOR OPENER	2350	500-875
1250 WATT HAIR DRYER	-	1250
100 WATT LIGHT BULB	-	100
1000 WATT MICROWAVE	-	700
REFRIGERATOR/FREEZER	2200	500
SECURITY SYSTEM	-	800-1050
1/2 HP SUMP PUMP	2150	800
1/2 HP SUMP PUMP	1300-	200-500
TELEVISION	-	1200-1650
TOASTER	-	1150
WASHING MACHINE	2300	1000
1/2 HP WELL PUMP	2100	3250
1/3 HP WELL PUMP	1400	750

⁴ - Wattages listed are approximated, always check appliances for actual figures.

INVERTER SERIES

PROFESSIONAL

Designed to be smaller, lighter, quieter, and provide a more stable power supply than a conventional generator, our inverter generators is the perfect way to power a tailgate party, or run sensitive electronic devices like TVs and computers while camping.

EQUIPPED WITH GFCI PROTECTION!



70061

POWERED by
CRX

UNIT INCLUDES

- RV Plug - 70063 and 70059

LIMITED WARRANTY

70059, 70061	3yr Consumer, 1yr Commercial
70063	
SIG22PK	90 days

MODEL #	PART #	STARTING WATTS	RUNNING WATTS*	AC VOLTAGE	AC FREQUENCY	OVERLOAD AMPERAGE	RUN TIME-25% LOAD	dBA-25% LOAD @ 7M ⁺	OUTLET TYPE
SIG2218 ¹	70061	2200	1800	120V	60 Hz	15A MAX	10 Hour	53	120V Duplex (5-20R) GFCI, 12V DC Automotive
SIG3632E ¹	70059	3600	3200	120V	60 Hz	28A MAX	9 Hour	67	120V Duplex (5-20R) GFCI, 12V DC Automotive, 120V Twist-Lock (L5-30)
SIG4540E ¹	70063	4500	4000	120V	60 Hz	30A MAX	9 Hour	69	120V Duplex (5-20R) GFCI, 12V DC Automotive, 120V Twist-Lock (L5-30)

ENGINES

PART #	ENGINE	DISPLACEMENT	START	FUEL TANK CAPACITY
70061	CRX®	79cc	Recoil	1.1 gal. Gasoline
70059	CRX®	223cc	Recoil/Electric	2.3 gal. Gasoline
70063	CRX®	223cc	Recoil/Electric	2.3 gal. Gasoline

DIMENSIONS & WEIGHT

70061	L 20" x W 12" x H 18" 46 lbs
70059	L 21" x W 16" x H 16.5" 95 lbs
70063	L 24" x W 17.5" x H 19" 110 lbs

PARALLEL BOX ACCESSORY

For use with SIG2218 only

MODEL #	PART #	AMPS
SIG22PK	80442	30A

The **SIG22PK** parallel box includes two sets of power leads and grounding wires for easy connection between two inverter generators. **Inverter generators and parallel box sold separately.**



80442

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Generator per PGMA (Portable Generator Manufacturers' Association) standard ANSI/PGMA G300-2015, Safety and Performance of Portable Generators

+ - Approximate sound levels per ISO 3744, ISO 10884 (Extrapolated to sound pressure @ 7M)

WATER PUMP SERIES

PROFESSIONAL

PORTABLE WATER PUMPS

Engineered to handle water containing mud, sand, leaves, twigs, and other contaminants, SIMPSON®'s water pumps are perfect for clearing wastewater from residential, municipal, and industrial sites. Easy to transport, use, and clean, SIMPSON's water pumps will get the job done no matter where you need them.

PORTABLE



71007

POWERED by
CRX

UNIT INCLUDES

71007 (71007S)	2" Plastic Strainer, 1x Wire Clamp
71009 (71009S)	Hose Barb (x1 Straight - x1 90°)
71010 (71010S)	3" Plastic Strainer, 1x Wire Clamp

LIMITED WARRANTY

All Units	3yr
------------------	-----

MODEL #	PART #	PUMP	ENGINE	START	FLOW	INLET/OUTLET DIAMETER	FUEL TANK CAPACITY	SUCTION HEAD LIFT	TOTAL HEAD LIFT
SSTP71007(-S) ¹	71007 (71007S)	2" Semi-Trash	CRX® 210*	Recoil	158 GPM	2"	0.7 gal.	25'	98'
SCP71009(-S) ¹	71009 (71009S)	2" Chemical	CRX® 210*	Recoil	195 GPM	2"	0.7 gal.	25'	98'
STP71010(-S) ¹	71010 (71010S)	3" Trash	CRX® 210*	Recoil	285 GPM	3"	0.7 gal.	25'	75'

PUMPS

2" Semi-Trash Pump

- Die cast aluminum pump housing
- Easy access quick clean out
- Silicon carbide mechanical seal
- Cast iron impeller and volute
- Debris up to 9/16"

2" Chemical Pump

- Fiber reinforced polymer pump housing
- Easy access quick clean out
- Ceramic carbide mechanical seal
- Fiber reinforced polymer impeller and volute

3" Trash Pump

- Die cast aluminum pump housing
- Easy access quick clean out
- Silicon carbide mechanical seal
- Cast iron impeller and volute
- Debris up to 1-1/5"

FRAME

71007(71007S) / 71010 (71010S)

Steel Frame

- Powder-coated finish for durability and corrosion resistance

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 210	208cc	0.7 gal.

DIMENSIONS & WEIGHT

71007 (71007S)	L 20" x W 17.2" x H 19.4" 65 lbs.
71009 (71009S)	L 19.1" x W 16.1" x H 15.5" 43 lbs.
71010 (71010S)	L 22.8" x W 20" x H 21.2" 79 lbs.

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

(-S) - Indicates shippable packaging

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

HIGH-PERFORMANCE HOSES

M22 ADAPTER INCLUDED
WITH MORFLEX® HOSES

Used to connect multiple hoses with standard M22 connections



MORFLEX® HOSE SERIES

The MorFlex hose, designed for flexibility and kink resistance, features a durable, non-marring, and abrasion-resistant polyurethane jacket. It includes 4-inch bend protectors and is compatible with most gas and electric pressure washers up to 3700 PSI, thanks to its standard M22 threaded connections.



Max Temp: 140° F
Inner Material: Polyester
Outer Material: Polyurethane w/4" Bend Protectors

Fittings: M22 x M22
Terminated: N/A

MONSTER HOSE SERIES

Designed for cold water up to 140°F, this hose features a dual-braided steel over polyester construction for durability. Its flexible, non-marring, translucent polyurethane jacket is thrice as abrasion-resistant as rubber. Withstanding up to 4500 PSI, it fits most pressure washers with 3/8" quick connect fittings.



Max Temp: 140° F
Inner Material: Polyester & Steel-braided
Outer Material: Polyurethane w/4" Bend Protectors
Fittings: Brass QC Socket x Steel QC Plug

Terminated:
41113, 41030 - Steel Solid MNPT x Steel Solid MNPT
41028 (41071) - Brass Solid QC Socket x Steel Solid QC Plug

ARMOR® HOSE SERIES

The Armor Hose, built for high-temperature applications up to 250°F, boasts a durable dual-braided steel over polyester construction. Its flexible, non-marring, opaque polyurethane jacket is abrasion-resistant. Compatible with hot and cold water, it fits most commercial gas pressure washers with 3/8" quick connect fittings, handling up to 4500 PSI.



Max Temp: 250° F
Inner Material: Polyester & Steel-braided
Outer Material: Polyurethane w/4" Bend Protectors

Fittings: Brass QC Socket x Steel QC Plug
Terminated: Steel Solid MNPT x Steel Solid MNPT

WRAPPED RUBBER HOSE SERIES

Designed for industrial and commercial use, this heavy-duty hose features single or dual-braided technology with a wrapped rubber outer jacket and bend protectors for longevity. Rated for temperatures up to 250°F and pressures from 4,500 to 10,000 PSI, it's compatible with 3/8" quick connect pressure washers.



Max Temp: 250° F
Inner Material:
41183 - R1 Steel-Braided
All Others - R2 Steel-braided
Outer Material:
41183 - Wrapped Rubber w/6" Bend Protectors
All Others - Wrapped Rubber w/24" Bend Protectors

Fittings:
41183 - Brass QC Socket x Steel QC Plug
All Others - SS QC Socket x SS QC Plug
Terminated: Steel 3/8" Rigid MNPT x
Steel 3/8" Swivel MNPT

LIMITED WARRANTY

All Hoses 90 day accessory

PART #	PRESSURE	ID x LENGTH
40224 (41107) ⁴	3300 PSI	1/4" x 25'
40225 (41108) ⁴	3700 PSI	1/4" x 25'
40226 (41109) ⁴	3700 PSI	1/4" x 50'

PART #	PRESSURE	ID x LENGTH
41113	4500 PSI	3/8" x 25'
41028 (41071) ⁴	4500 PSI	3/8" x 50'
41030	4500 PSI	3/8" x 100'
41032	4500 PSI	3/8" x 150'
41034	4500 PSI	3/8" x 200'

PART #	PRESSURE	ID x LENGTH
41114 (41095) ⁴	4500 PSI	3/8" x 50'
41096	4500 PSI	3/8" x 100'
41115	4500 PSI	3/8" x 200'

PART #	PRESSURE	ID x LENGTH
41183	4500 PSI	3/8" x 50'
41184	8000 PSI	3/8" x 50'
41185	8000 PSI	3/8" x 100'
41186	8000 PSI	3/8" x 200'
41187	10,000 PSI	3/8" x 50'
41188	10,000 PSI	3/8" x 100'
41189	10,000 PSI	3/8" x 200'
41190	10,000 PSI	1/2" x 50'
41191	10,000 PSI	1/2" x 100'
41192	10,000 PSI	1/2" x 200'

⁴ - Shipped in retail packaging

PREMIUM ACCESSORIES



DESCRIPTION	PART #	PRESSURE	FLOW RATING	MAX TEMP	INLET CONNECTION	OUTLET CONNECTION	Delco AVAIL.
Front Load Spray Gun	80147	3400 PSI	8.0 GPM	140° F	M22 Male Hose Connect	M22 Female Hose Connect	
360° Swivel Side Assist Spray Gun	80148	4500 PSI	6.6 GPM	140° F	M22 Male Hose Connect with included Female M22 x QC Plug adapter	M22 Female Hose Connect	
Hot Water Spray Gun	80178	5075 PSI	12.0 GPM	212° F	3/8" FNPT Hose Connect with included 3/8" MNPT x M22 Male and 3/8" MNPT x QC Plug adapters	1/4" FNPT Hose Connect	✓
16" Spray Wand	80149	3600 PSI	N/A	140° F	M22 Male Spray Gun Connect	1/4" QC Socket Nozzle Connect	
31" Spray Wand	80479	4500 PSI	N/A	140° F	M22 Male Spray Gun Connect	1/4" QC Socket Nozzle Connect	
48" Insulated Wand	80179	5075 PSI	N/A	212° F	1/4" MNPT Spray Gun Connect	1/4" QC Socket Nozzle Connect	✓
18' Telescoping Wand	80470	4000 PSI	N/A	140° F	3/8" QC Plug Spray Gun Connect	1/4" QC Socket Nozzle Connect	



DIAL-N-WASH

PART #: 82232
Max Pressure: 4500 PSI
Max Flow: 4.0 GPM
Max Temp: 140° F
Inlet - Spray Gun Connect: M22 Male
Outlet - Lance Connect: M22 Female



O-RING & FILTER KIT

PART #: 80151
Two Filters: (2) 25.0mm OD
Two O-ring Sets: (2) 18.0mm OD, (2) 15.0mm OD, (2) 15.6mm OD, (2) 14.0mm OD

FOAM CANNON

PART #: 80271
Max Pressure: 4000 PSI
Max Temp: 140° F
Lance Connect: 1/4" QC Plug



NOZZLES

DESCRIPTION	PART #	PRESSURE	MAX TEMP	NOZZLE SIZE	LANCE CONNECT	Delco AVAIL.
5-Pack: 0°, 15°, 25°, 40° and Soap	80145	3600 PSI	212° F	3.0, Soap	1/4" QC Plug	✓
5-Pack: 0°, 15°, 25°, 40° and Soap	80146	4500 PSI	212° F	4.0, Soap	1/4" QC Plug	✓
2nd Story: Wash and Soap	80177	5000 PSI	212° F	10.0, 40.0	1/4" QC Plug	✓
5-N-1: 0°, 15°, 25°, 40° and Soap	80142	3600 PSI	140° F	2.8-3.2, Soap	1/4" QC Plug	
Turbo	80143	3600 PSI	212° F	3.0	1/4" QC Plug	✓
Turbo	80144	4500 PSI	212° F	4.0	1/4" QC Plug	✓



DESCRIPTION	PART #	CONTENT AMOUNT
15w40 Pump Oil	80138	16oz
Pump Guard - Aerosol	80273	4oz



- Also available for Delco® pressure washers

PREMIUM ACCESSORIES

SURFACE CLEANERS

DESCRIPTION	PART #	PRESSURE	MAX TEMP	HOSE CAPACITY	Delco AVAIL.
Manual Hose Reel - 100'	80399	5000 PSI	212° F	100' x 3/8"	✓
Manual Hose Reel - 100' or 125'	80490	5000 PSI	212° F	3/8" x 100' or 1/4" x 125'	
Manual Hose Reel - 200'	80403	5000 PSI	212° F	3/8" x 200'	✓
Portable Hose Reel - 100' or 125'	80401	5000 PSI	212° F	3/8" x 100' or 1/4" x 125'	

PORTABLE



SURFACE CLEANERS

DESCRIPTION	PART #	PRESSURE	MAX TEMP	CONNECTION	MATERIAL	FILTER	Delco AVAIL.
15" Steel Surface Cleaner	80299	3700 PSI	140° F	1/4" QC Plug Inlet Lance Connect	Powder Coated Construction	N/A	
20" Commercial Surface Cleaner w/Handle	80182	4500 PSI	212° F	3/8" QC Plug Inlet Hose Connect	Heavy-duty ABS	High Pressure Inlet	✓



PROFESSIONAL CLEANING DETERGENTS

VITAL OXIDE

Vital Oxide, an EPA-registered disinfectant cleaner, effectively eliminates odors and kills mold. It's ready-to-use, requiring no mixing - simply spray, wipe, or fog directly from the bottle. It's skin-friendly and non-corrosive to treated items..

VITAL OXIDE IN ACTION

- Used in emergency response to eliminate Norovirus outbreaks
- Clinical trials have shown a decrease of 95% in healthcare associated infections (HAI'S) of acinetobacter spp in hospital environment
- Used in disaster response to eliminate mold and mildew from flood damage
- University and government sponsored studies document long-term effectiveness on mold and mold spores, even eliminating mold spores

PART #	CONTENTS AMOUNT
82245	5 gal. Pail
82246*	15 gal. Drum
82247*	55 gal. Drum
82248*	261 gal. Tote

* - Shipping times vary due to availability. Contact your sales rep for more information



CLEANING DETERGENTS

SIMPSON® pressure washer cleaners, specifically formulated to boost your pressure washer's performance, offer multi-purpose, heavy-duty, and biodegradable formulas. These cleaners effectively cut through grease, remove stains, and tackle mold and mildew, making them ideal for both job-sites and home use.

FOR USE ON MULTIPLE SURFACES

- Industrial sites & exterior surfaces
- Tough stains on brick, siding & concrete
- Commercial equipment & vehicle fleet
- Grease & grime
- Deck, fence & patio
- Cars, trucks, bikes & RVs
- Outdoor furniture

PART #	USE	CONTENTS AMOUNT
88290 (88282)	Heavy-Duty	1 gal.
88289 (88281)	Multi-Purpose	1 gal.
88291 (88283)	Natural Green Formula	1 gal.



The Green Formula is an eco-friendly, safe, and biodegradable cleaning solution that contains no harsh chemicals.

PREMIUM PUMPS & UNLOADER KITS



AAA® INDUSTRIAL TRIPLEX PUMP

SIMPSON® offers AAA® Industrial Triplex Pumps, that contain premium seals, high-strength bearings, and corrosion-resistant materials that are made to provide a long service life. Many models feature technologies such as Easy Start and PowerBoost®, making AAA pumps powerful and easy to use.

AAA® PUMP KITS INCLUDE

- Mounting hardware (nuts & bolts)
- Crankshaft key
- Chemical siphon hose w/filter

LIMITED WARRANTY

90066, 90067, 90068	7yr
90038, 90039, 90034 90036, 90037, 90058, 90057, 90056, 90066, 90068	5yr
80362, 80361, 80404, 80405	90 days



90039



90058



90037



90067

AAA® PUMP KITS

PART #	PRESSURE	FLOW	MANIFOLD	UNLOADER	SHAFT SIZE	SPEED	OUTLET
90036	POWER BOOST 3200 PSI	2.8 GPM	Brass	Integrated w/Easy Start	3/4"	3450 RPM	M22
90037	POWER BOOST 3700 PSI	2.5 GPM	Brass	Integrated w/Easy Start	3/4"	3450 RPM	M22
90038	POWER BOOST 3800 PSI	3.5 GPM	Brass	Integrated w/Easy Start	1"	3450 RPM	QC
90039	POWER BOOST 4000 PSI	3.5 GPM	Brass	Integrated w/Easy Start	1"	3450 RPM	QC
90034	POWER BOOST 4400 PSI	4.0 GPM	Brass	Integrated w/Easy Start	1"	3450 RPM	QC
90056	3000 PSI	3.0 GPM	Brass	External w/Bypass Hose	3/4"	3450 RPM	QC
90058	3300 PSI	3.2 GPM	Brass	External w/Bypass Hose	3/4"	3450 RPM	QC
90057	3500 PSI	4.0 GPM	Brass	External w/Bypass Hose	3/4"	3450 RPM	QC

AAA® GAX

PART #	PRESSURE	FLOW	MANIFOLD	HP/KW	SHAFT SIZE	SPEED	WEIGHT
90066	4000 PSI	3.5 GPM	Brass	9.8/7.3	24mm Solid	1750 RPM	17 lbs.
90067	4000 PSI	4.0 GPM	Brass	11.1/8.8	24mm Solid	1750 RPM	17 lbs.
90068	4000 PSI	4.4 GPM	Brass	11.1/8.3	24mm Solid	1750 RPM	17 lbs.

AAA® PUMP UNLOADERS

PART #	PRESSURE	FLOW	MATERIAL	THREADING	EASY START VALVE	MAX TEMPERATURE
80362	3500 PSI	12 GPM	Brass	3/8" FNPT Inlet/Outlet	Yes	212° F
80361	4500 PSI	12 GPM	Brass	3/8" FNPT Inlet/Outlet	Yes	212° F
80404	5500 PSI	12 GPM	Brass	3/8" FNPT Inlet/Outlet	Yes	212° F
80405	6500 PSI	12 GPM	Stainless Steel	3/8" FNPT Inlet/Outlet	Yes	212° F




THERMAL RELIEF VALVE (TRV)

PART #: 80290
 RATED TEMP: 140° F
 THREAD CONNECT: 1/4" MNPT



With PowerBoost® technology, high water pressure levels trigger a bypass around the venturi nozzle, where chemical suction takes place, reducing pressure loss. Pumps with PowerBoost deliver higher pressure at the nozzle for improved impact and cleaning performance.

- HIGHER PRESSURE AT THE NOZZLE
- GREATER IMPACT AND CLEANING PERFORMANCE

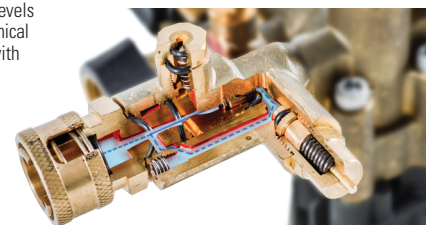

SINGLE CYLINDER



Our powerful line of CRX® single-cylinder engines have been engineered to perform in a variety of outdoor applications. We've fine-tuned every element, carefully selecting each component to ensure your equipment has the power it needs for every job, every time. Whether you're a DIY'er, or Industry Pro, CRX engines represent consistency, reliability and functional innovation.

ALL UNITS:

PTO Shaft Rotation: Counterclockwise
Ignition System: Transistor Magneto
Adjustable Throttle: Yes
Low Oil Shutdown: Standard

Carburetor: Naturally Aspirated
Governor System: Mechanical
Evaporative Emissions: Yes

LIMITED WARRANTY

All Units 3yr Commercial

LOW OIL SHUTDOWN

The Low Oil Shutdown (LOS) feature, an internal oil level sensor, automatically halts the engine when oil levels are insufficient for safe operation, preventing engine damage. This indicates that the oil needs to be refilled, ensuring optimal engine performance.



ENGINE MODEL	CRX® 165	CRX® 210	CRX® 225	CRX® 225
PART #	2412102	2422102	2432102	2432602
BORE	2.68" (68mm)	2.76" (70mm)	2.83" (72mm)	2.83" (72mm)
STROKE	1.77" (45mm)	2.13" (54mm)	2.17" (55mm)	2.17" (55mm)
DISPLACEMENT	163cc	208cc	224cc	224cc
COMPRESSION RATIO	8:3:1	8.6:1	8.5:1	8.5:1
NET POWER	3.2 kW @ 3600 RPM	4.3 kW @ 3600 RPM	4.5 kW @ 3600 RPM	4.5 kW @ 3600 RPM
NET TORQUE	10 Nm @ 2800 RPM	11.5 Nm @ 2600 RPM	11.5 Nm @ 2600 RPM	11.5 Nm @ 2600 RPM
ALTERNATOR OUTPUT	N/A	N/A	N/A	12VDC/9A/108W
STARTING SYSTEM	Recoil	Recoil	Recoil	Recoil/Key-Start (Battery not included)
RECOIL COLOR	Red	Red	Black	Black
LUBRICATION SYSTEM	Splash	Splash	Splash	Splash
AIR CLEANER	Dual Element	Dual Element	Dual Element	Dual Element
OIL CAPACITY	0.64 qt.	0.64 qt.	0.64 qt.	0.64 qt.
FUEL TANK CAPACITY	0.7 gal.	0.7 gal.	0.7 gal.	0.7 gal.
EXHAUST EMISSIONS	49-State ¹	49-State ¹	49-State ¹	49-State ¹
PTO DIAMETER	3/4" (19.05mm)	3/4" (19.05mm)	3/4" (19.05mm)	3/4" (19.05mm)
PTO FLANGE TYPE	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange A	SAE J609 Flange A
ENGINE DRY WEIGHT	34 lbs	33 lbs	33 lbs	33 lbs
ENGINE OVERALL DIMENSIONS	L 14.25" x W 12.75" x H 13.75"	L 14.25" x W 12.75" x H 13.75"	L 14.25" x W 12.75" x H 13.75"	L 14.25" x W 12.75" x H 13.75"

SINGLE CYLINDER

POWERED by
CRX

CRX® PROFESSIONAL ENGINES



ENGINE MODEL	CRX® 275	CRX® 340	CRX® 420	CRX® 420
PART #	2444102	2456102	2466102	2466503
BORE	2.95" (75mm)	3.23" (82mm)	3.54" (90mm)	3.54" (90mm)
STROKE	2.42" (61.5mm)	2.52" (64mm)	2.60" (66mm)	2.60" (66mm)
DISPLACEMENT	272cc	338cc	420cc	420cc
COMPRESSION RATIO	8.6:1	8.4:1	9.0:1	9.0:1
NET POWER	5.8 kW @ 3600 RPM	7.2 kW @ 3600 RPM	9.0 kW @ 3600 RPM	9.0 kW @ 3600 RPM
NET TORQUE	15.5 Nm @ 2800 RPM	21 Nm @ 2600 RPM	27 Nm @ 2600 RPM	27 Nm @ 2600 RPM
ALTERNATOR OUTPUT	N/A	N/A	N/A	12VDC/20A/240W
STARTING SYSTEM	Recoil	Recoil	Recoil	Recoil/Key-Start (Battery not included)
RECOIL COLOR	Black	Black	Black	Black
LUBRICATION SYSTEM	Splash	Splash	Splash	Splash
AIR CLEANER	Dual Element	Dual Element	Dual Element	Dual Element
OIL CAPACITY	0.84 qt.	1.16 qt.	1.6 qt.	1.6 qt.
FUEL TANK CAPACITY	0.8 gal.	1.6 gal.	2.0 gal.	2.0 gal.
EXHAUST EMISSIONS	49-State ¹	49-State ¹	49-State ¹	49-State ¹
PTO DIAMETER	1" (25.4mm)	1" (25.4mm)	1" (25.4mm)	1" (25.4mm)
PTO FLANGE TYPE	SAE J609 Flange A	SAE J609 Flange B	SAE J609 Flange B	SAE J609 Flange B
ENGINE DRY WEIGHT	41 lbs	69 lbs	67 lbs	67 lbs
ENGINE OVERALL DIMENSIONS	L 14" x W 15" x H 15.25"	L 16.25" x W 17.75" x H 18"	L 16.25" x W 17.75" x H 18"	L 16.25" x W 19.75" x H 18"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

V-TWIN



Big jobs need big power, and the CRX® V-Twin engine line is the perfect power match for commercial/industrial applications. Built to last with premium features such as full pressure lubrication, oil cooler and filter, heavy-duty muffler, advanced air filtration system and a 20A alternator. If you're looking to maximize your machine's power output, CRX meets the demand for reliability and performance.

ALL UNITS:

PTO Shaft Rotation: Counterclockwise
Ignition System: Transistor Magneto
Adjustable Throttle: Yes
Low Oil Shutdown: Standard

Carburetor: Naturally Aspirated
Governor System: Mechanical
Evaporative Emissions: Yes

LIMITED WARRANTY

All Units 3yr Commercial

LOW OIL SHUTDOWN

The Low Oil Shutdown (LOS) feature, an internal oil level sensor, automatically halts the engine when oil levels are insufficient for safe operation, preventing engine damage. This indicates that the oil needs to be refilled, ensuring optimal engine performance.



ENGINE MODEL	CRX® 680	CRX® 680	CRX® 750	CRX® 1000	CRX® 1000
PART #	2678502	2676502	2688502	2698501	2699501
BORE	3.07" (78mm)	3.07" (78mm)	3.23" (82mm)	3.54" (90mm)	3.54" (90mm)
STROKE	2.8" (71mm)	2.8" (71mm)	2.8" (71mm)	3.09" (78.5mm)	3.09" (78.5mm)
DISPLACEMENT	679cc	679cc	750cc	999cc	999cc
COMPRESSION RATIO	8.5:1	8.5:1	8.8:1	9.0:1	9.0:1
NET POWER	14.5 kW @ 3600 RPM	14.5 kW @ 3600 RPM	16.0 kW @ 3600 RPM	24.0 kW @ 3600 RPM	24.0 kW @ 3600 RPM
NET TORQUE	42 Nm @ 2600 RPM	42 Nm @ 2600 RPM	47 Nm @ 3000 RPM	71 Nm @ 2800 RPM	71 Nm @ 2800 RPM
ALTERNATOR OUTPUT	12VDC/20A/240W	120VDC/20A/240W	120VDC/20A/240W	120VDC/20A/240W	120VDC/20A/240W
STARTING SYSTEM	Key-Start	Key-Start	Key-Start	Key-Start	Key-Start
SHROUD COLOR	Black	Black	Black	Black	Black
LUBRICATION SYSTEM	Pressurized & Splash	Pressurized & Splash	Pressurized & Splash	Pressurized & Splash	Pressurized & Splash
AIR CLEANER	Dual Element	Dual Element	Dual Element	Cyclonic	Cyclonic
OIL CAPACITY	1.58 qt.	1.58 qt.	1.58 qt.	2.64 qt.	2.64 qt.
FUEL TANK CAPACITY	Tank not included	Tank not included	Tank not included	Tank not included	Tank not included
EXHAUST EMISSIONS	49-State ¹	49-State ¹	49-State ¹	49-State ¹	49-State ¹
PTO DIAMETER	1-1/8" (28.57mm)	1" (25.4mm)	1-1/8" (28.57mm)	1-1/8" (28.57mm)	1-7/16" (36.5mm)
PTO FLANGE TYPE	SAE J609 Flange B/C	SAE J609 Flange B/C	SAE J609 Flange B/C	SAE J609 Flange B/C	SAE J609 Flange B/C
ENGINE DRY WEIGHT	96 lbs.	96 lbs.	96 lbs.	137 lbs.	137 lbs.
ENGINE OVERALL DIMENSIONS	L 21.25" x W 20" x H 18.25"	L 21.25" x W 20" x H 18.25"	L 21.25" x W 20" x H 18.25"	L 23.5" x W 20" x H 22.5"	L 23.5" x W 20" x H 22.5"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

PATRIOT SERIES - HOT WATER

INDUSTRIAL

DELCO® PRESSURE WASHERS

The Patriot, designed for versatility, offers both portability and stationary use. It is engineered to deliver a superior clean tailored to your needs. The unit is equipped with a fixed thermostat powered by a dependable 3400W generator.

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40°
- Lance
- Engine oil 10W-30
- Spray gun

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- 1750 RPM slow speed
- V-Twin horizontal engine with key-start (battery not included)
- NEMA 4X electrical enclosure with burner on/off rocker switch and hour meter
- Corrosion resistant stainless steel coil cover
- Isolated pump & engine plate with vibration dampeners
- 3.4 kw generator with one 120V duplex outlet
- 120V burner system
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 horizontal coil



65013



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	DRIVE	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DPT3080331E ¹	65011	3000 PSI	8.0 GPM	VANGUARD® 23HP* w/Key-Start	COMET	Belt	15 gal.	15 gal.	855 lbs.
DPT3080251E ¹	65013	3000 PSI	8.0 GPM	HONDA® GX690* w/Key-Start	General Pump®	Belt	15 gal.	15 gal.	896 lbs.
DPT3080131E ¹	65146	3000 PSI	8.0 GPM	CRX® 680* w/Key-Start	COMET	Belt	15 gal.	15 gal.	855 lbs.
DPT3080151E ¹	65148	3000 PSI	8.0 GPM	CRX® 680* w/Key-Start	General Pump®	Belt	15 gal.	15 gal.	896 lbs.

PUMPS

General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options

HOSE

- 3/8" x 50' steel-braided Armor Hose™

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK
CRX® 680	679cc	External
HONDA® GX690	688cc	External
VANGUARD® 23HP	627cc	External

DIMENSIONS

All Units L 42" x W 45" x H 49"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

COBALT SERIES - HOT WATER

INDUSTRIAL

The Cobalt series is equipped with a high-performance pressure washing system driven by a twin-cylinder engine, featuring a fixed thermostat for precision temperature control. The heating of the pressurized water is done effectively with a diesel-fired heating system.

UNIT INCLUDES


- Hose
- Lance
- Spray gun
- Nozzles: 15°, 25°, 40° and Soap
- Engine oil 10W-30
- Downstream injector

LIMITED WARRANTY

ALL UNITS 10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- 1750 RPM slow speed
- V-Twin horizontal engine with key-start (battery not included)
- NEMA 4X electrical enclosure with burner on/off rocker switch and hour meter
- Corrosion resistant stainless steel coil cover
- Isolated pump & engine plate with vibration dampeners
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 horizontal coil

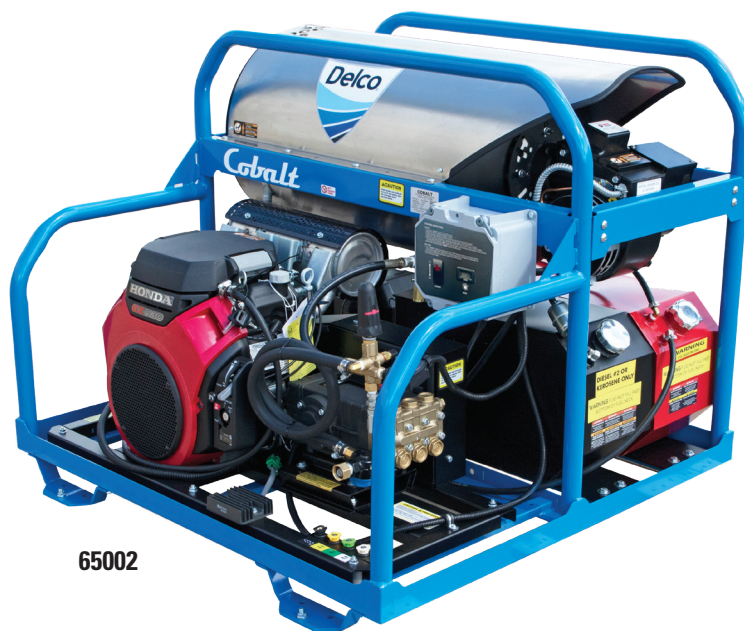

65002



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	DRIVE	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DCT3555331E ¹	65001	3500 PSI	5.5 GPM	VANGUARD® 570cc* w/Key-Start	COMET	Belt	7.5 gal.	7.5 gal.	661 lbs.
DCT3555251E ¹	65002	3500 PSI	5.5 GPM	HONDA® GX690* w/Key-Start	General Pump®	Belt	7.5 gal.	7.5 gal.	666 lbs.
DCT3555131E ¹	65143	3500 PSI	5.5 GPM	CRX® 680* w/Key-Start	COMET	Belt	7.5 gal.	7.5 gal.	661 lbs.
DCT3555151E ¹	65144	3500 PSI	5.5 GPM	CRX® 680* w/Key-Start	General Pump®	Belt	7.5 gal.	7.5 gal.	666 lbs.
DCT4050331E ¹	65005	4000 PSI	5.0 GPM	VANGUARD® 570cc* w/Key-Start	COMET	Belt	7.5 gal.	7.5 gal.	613 lbs.
DCT4055251E ¹	65004	4000 PSI	5.0 GPM	HONDA® GX690* w/Key-Start	General Pump®	Belt	7.5 gal.	7.5 gal.	613 lbs.
DCT4050131E ¹	65145	4000 PSI	5.0 GPM	CRX® 680* w/Key-Start	COMET	Belt	7.5 gal.	7.5 gal.	613 lbs.
DCT4055151E ¹	65158	4000 PSI	5.0 GPM	CRX® 680* w/Key-Start	General Pump®	Belt	7.5 gal.	7.5 gal.	613 lbs.

PUMPS

General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance
- Removable feet for forklift capabilities and alternative mounting options

HOSE

- 3/8" x 50' steel-braided Armor Hose™

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK
CRX® 680	679cc	External
VANGUARD® 570cc	570cc	External
HONDA® GX690	688cc	External

DIMENSIONS

All Units L 42" x W 40" x H 38"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.
* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

STREAMLINER SERIES - HOT WATER

INDUSTRIAL

DELCO® PRESSURE WASHERS

This potent mobile washing system is ingeniously designed to be compact, allowing it to comfortably fit within the confines of a transit van or truck bed, and effortlessly pass through a 36" doorway.

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40°
- Lance
- Engine oil 10W-30
- Spray gun
- Downstream injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- 1750 RPM slow speed
- CRX®, HONDA®, VANGUARD® key-start engines (battery not included)
- Burner on/off rocker switch and hour meter
- High temperature safety switch
- Isolated pump & engine plate with vibration dampeners
- 3.4 kw generator with two 120V outlets
- 120V burner system
- Wheel brake system
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 horizontal coil
- Large capacity fuel tank



65016



MODEL #	PART #	PRESSURE	FLOW	ENGINE	PUMP	DRIVE	GAS TANK	DIESEL TANK	PRODUCT WEIGHT
DSL4040253E ¹	65016	4000 PSI	4.0 GPM	HONDA® GX390* w/Key-Start	General Pump®	Gear	5.0 gal.	10.0 gal.	540 lbs.
DSL4040333E ^{1**}	65017	4000 PSI	4.0 GPM	VANGUARD® 479cc* w/Key-Start	COMET	Gear	5.0 gal.	10.0 gal.	540 lbs.
DSL4040132E ¹	65142	4000 PSI	4.0 GPM	CRX® 420* w/Key-Start	COMET	Gear	5.0 gal.	10.0 gal.	540 lbs.
DSL4040232E ¹	65018	4000 PSI	4.0 GPM	HONDA® GX390* w/Key-Start	COMET	Direct	5.0 gal.	10.0 gal.	540 lbs.
DSL4040332E ^{1**}	65019	4000 PSI	4.0 GPM	VANGUARD® 479cc* w/Key-Start	COMET	Direct	5.0 gal.	10.0 gal.	540 lbs.
DSL4040133E ¹	65131	4000 PSI	4.0 GPM	CRX® 420* w/Key-Start	COMET	Direct	5.0 gal.	10.0 gal.	540 lbs.

PUMPS

General Pump® Industrial Triplex

- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex Pump

- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance

HOSE

- 3/8" x 50' steel-braided Armor Hose™

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK
CRX® 420	679cc	External
HONDA® GX390	389cc	External
VANGUARD® 479cc	570cc	External

DIMENSIONS

All Units L 33" x W 40" x H 45"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

** - Battery not included.

ELIMINATOR SERIES - HOT WATER

INDUSTRIAL

UNIT INCLUDES

- Hose
- Spray gun
- Lance
- Nozzles: 15°, 25°, 40°

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- 1750 RPM slow speed
- NEMA 4X electrical enclosure with rocker switch, hour meter and soap control switch
- High pressure soap with metering valve
- Roll down doors with lock
- Slide out motor pump tray
- Time delay shut down
- Remote box ready wired
- Float tank
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 vertical coil

OPTIONAL ACCESSORY

(sold separately and available upon order)

PART #	DESCRIPTION
7100283	Draft diverter
7110785	Auto start/stop shut-off
7110510	Wired NEMA 4X remote operating station



65030



MODEL #	PART #	PRESSURE	FLOW	MOTOR	PUMP	FUEL TYPE	PRODUCT WEIGHT
DNG2040031B	65030	2000 PSI	4.0 GPM	5HP 230V 1Ø 21A	COMET	Natural Gas	807 lbs.
DNG2040031C	65031	2000 PSI	4.0 GPM	5HP 230V 3Ø 12.6A	COMET	Natural Gas	844 lbs.
DNG2040031D	65032	2000 PSI	4.0 GPM	5HP 460V 3Ø 6.3A	COMET	Natural Gas	806 lbs.
DLP2040031B	65033	2000 PSI	4.0 GPM	5HP 230V 1Ø 21A	COMET	Liquid Propane	800 lbs.
DLP2040031C	65034	2000 PSI	4.0 GPM	5HP 230V 3Ø 12.6A	COMET	Liquid Propane	813 lbs.
DLP2040031D	65035	2000 PSI	4.0 GPM	5HP 460V 3Ø 6.3A	COMET	Liquid Propane	806 lbs.
DNG3040031B	65036	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 36A	COMET	Natural Gas	834 lbs.
DNG3040031C	65037	3000 PSI	4.0 GPM	7.5HP 230V 3Ø 19.8A	COMET	Natural Gas	794 lbs.
DNG3040031D	65038	3000 PSI	4.0 GPM	7.5HP 460V 3Ø 9.9A	COMET	Natural Gas	804 lbs.
DLP3040031B	65039	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 36A	COMET	Liquid Propane	854 lbs.
DLP3040031C	65040	3000 PSI	4.0 GPM	7.5HP 230V 3Ø 19.8A	COMET	Liquid Propane	820 lbs.
DLP3040031D	65041	3000 PSI	4.0 GPM	7.5HP 460V 3Ø 9.9A	COMET	Liquid Propane	806 lbs.
DNG3050031B	65042	3000 PSI	5.0 GPM	10HP 230V 1Ø 39A	COMET	Natural Gas	839 lbs.
DNG3050031C	65043	3000 PSI	5.0 GPM	10HP 230V 3Ø 25A	COMET	Natural Gas	800 lbs..
DNG3050031D	65044	3000 PSI	5.0 GPM	10HP 460V 3Ø 12.5A	COMET	Natural Gas	810 lbs
DLP3050031B	65045	3000 PSI	5.0 GPM	10HP 230V 1Ø 39A	COMET	Liquid Propane	820 lbs.
DLP3050031C	65046	3000 PSI	5.0 GPM	10HP 230V 3Ø 25A	COMET	Liquid Propane	800 lbs.
DLP3050031D	65047	3000 PSI	5.0 GPM	10HP 460V 3Ø 12.5A	COMET	Liquid Propane	816 lbs.
DNG3080031C	65048	3000 PSI	8.0 GPM	15HP 230V 3Ø 35A	COMET	Natural Gas	800 lbs.
DNG3080031D	65049	3000 PSI	8.0 GPM	15HP 460V 3Ø 17.5A	COMET	Natural Gas	760 lbs.
DLP3080031C	65050	3000 PSI	8.0 GPM	15HP 230V 3Ø 35A	COMET	Liquid Propane	814 lbs.
DLP3080031D	65051	3000 PSI	8.0 GPM	15HP 460V 3Ø 17.5A	COMET	Liquid Propane	820 lbs.

PUMPS

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

- Powder-coated for corrosion resistance
- Corrosion resistant, stainless steel vented panels

HOSE

- 3/8" x 50' steel-braided Armor Hose™

DIMENSIONS

All Units L 30" x W 50" x H 53"

VERSA SERIES - HOT WATER

INDUSTRIAL

DELCO® PRESSURE WASHERS

The Versa series, available in either powder-coated or stainless steel frames, stands as a dependable option for a wide range of cleaning equipment needs. Its superior quality and unique design set this horizontal coil electric cleaning system apart, making it the best in its class.

UNIT INCLUDES

- Hose
- Spray gun
- Lance
- Nozzles: 15°, 25°, 40°

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 1yr Motor

FEATURES

- 1750 RPM slow speed
- NEMA 4X electrical enclosure with burner on/off rocker switch, and hour meter, time delay-shut off
- Large capacity diesel fuel tank
- Horizontal heat exchanger with stainless steel housing
- 120V or 230V burner
- Burner fuels: No. 1/No. 2 diesel or kerosene

OPTIONAL ACCESSORY

(sold separately and available upon order)

PART #	DESCRIPTION
7110785	Auto start/stop shut off



65083



MODEL #	PART #	DESCRIPTION	PRESSURE	FLOW	MOTOR	PUMP	DRIVE	DIESEL TANK	PRODUCT WEIGHT
DVA2525031A-S	65073 (operates at 300°F)	VERSA SUPER STEAMER	250 PSI	2.5 GPM	0.75HP 120V 1Ø 6.1A	COMET	Belt	8.75 gal	600 lbs
DVA2525031B-S/SS	65078 (operates at 300°F)	VERSA SS SUPER STEAMER	250 PSI	2.5 GPM	0.75HP 120V 1Ø 6.1A	COMET	Belt	8.75 gal	574 lbs
DVA1030031A	65072	VERSA 1030	1000 PSI	3.0 GPM	2HP 120V 1Ø 21A	COMET	Belt	8.75 gal	607 lbs
DVA1030031A/SS	65077	VERSA SS 1030	1000 PSI	3.0 GPM	2HP 120V 1Ø 21A	COMET	Belt	8.75 gal	556 lbs
DVA1030031B	65079	VERSA 1030	1000 PSI	3.0 GPM	2HP 230V 1Ø 10.5A	COMET	Belt	8.75 gal	656 lbs
DVA1030031B/SS	65083	VERSA SS 1030	1000 PSI	3.0 GPM	2HP 230V 1Ø 10.5A	COMET	Belt	8.75 gal	656 lbs
DVA2040031B	65071	VERSA 2040	2000 PSI	4.0 GPM	5HP 230V 1Ø 21A	COMET	Belt	8.75 gal	719 lbs
DVA2040031B/SS	65076	VERSA SS 2040	2000 PSI	4.0 GPM	5HP 230V 1Ø 21A	COMET	Belt	8.75 gal	586 lbs
DVA3040031B	65070	VERSA 3040	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 36A	COMET	Belt	8.75 gal	694 lbs
DVA3040031C/SS	65074	VERSA SS 3040	3000 PSI	4.0 GPM	7.5HP 230V 3Ø 19A	COMET	Belt	8.75 gal	690 lbs
DVA3040031B/SS	65075	VERSA SS 3040	3000 PSI	4.0 GPM	7.5HP 230V 1Ø 36A	COMET	Belt	8.75 gal	678 lbs

PUMPS

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance
- All stainless steel frame and panels

HOSE

- 3/8" x 50' steel-braided Armor Hose™

DIMENSIONS

All Units L 35" x W 30" x H 43"

EQUALIZER SERIES - HOT WATER

INDUSTRIAL

The Equalizer series, offered in both gas and electric models, is designed to accommodate a diverse range of cleaning applications. This comprehensive vertical coil pressure washing system boasts a broad four-wheel stance, enhancing both mobility and versatility, making it a standout choice for your cleaning needs.

UNIT INCLUDES

- Hose
- Spray gun
- Lance
- Nozzles: 15°, 25°, 40°
- Adjustable soap control (electric models)

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 3yr Engine, 1yr Motor

FEATURES

- 1750 RPM slow speed
- NEMA 4X electrical enclosure with rocker switch, hour meter and soap control switch
- External diesel fuel tank (4.4 gal.)
- 120V burner system
- 35' GFCI electrical cord
- Burner fuels: No. 1/No. 2 diesel or kerosene
- 1/2" Schedule 80 vertical coil

OPTIONAL ACCESSORY

(sold separately and available upon order)

PART #	DESCRIPTION
7112623	Chemical Injector Kit (gas models)



65068



MODEL #	PART #	DESCRIPTION	PRESSURE	FLOW	ENGINE/MOTOR	PUMP	DRIVE	PRODUCT WEIGHT
DEZ1030032A	65060	EQUALIZER 1030	1000 PSI	3.0 GPM	2HP 120V 1Ø 21A	COMET	Direct	519 lbs.
DEZ1030032B	65061	EQUALIZER 1030	1000 PSI	3.0 GPM	2HP 230V 1Ø 10.5A	COMET	Direct	549 lbs.
DEZ2040032B	65062	EQUALIZER 2040	2000 PSI	4.0 GPM	5HP 230V 1Ø 21A	COMET	Direct	566 lbs.
DEZ2040031B	65063	EQUALIZER 2040	2000 PSI	4.0 GPM	5HP 230V 1Ø 21A	COMET	Belt	526 lbs.
DEZ3040031C	65064	EQUALIZER 2040	3000 PSI	4.0 GPM	5HP 230V 3Ø 12.6A	COMET	Belt	526 lbs.
DEZ3040232E ¹	65068	EQUALIZER 3040HC	3000 PSI	4.0 GPM	HONDA® GX390*	COMET	Direct	525 lbs.
DEZ3040252E ¹	65069	EQUALIZER 3040HG	3000 PSI	4.0 GPM	HONDA® GX390*	General Pump®	Direct	514 lbs.
DEZ4040132E ¹	65147	EQUALIZER 3040C	4000 PSI	4.0 GPM	CRX®420* w/Key-Start	COMET	Direct	525 lbs.

PUMPS

General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex Pump

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance
- 13" premium heavy-duty tires for easy mobility and vibration dampening

HOSE

- 3/8" x 50' steel-braided Armor Hose™

ENGINES

ENGINE	DISPLACEMENT	FUEL TANK CAPACITY
CRX® 420	420cc	2.0 gal
HONDA® GX390	389cc	2.0 gal

DIMENSIONS

All Units L 35" x W 30" x H 43"

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.
 * - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.

DOMINATOR SERIES - HOT/COLD

INDUSTRIAL

DELCO® PRESSURE WASHERS

The Dominator Series, designed with compactness and user-friendliness in mind, is a testament to high-quality components and remarkable value. This horizontal coil electric hot water pressure washer comes equipped with features like downstream chemical injection, enhancing its functionality and efficiency.

UNIT INCLUDES

- Hose
- Nozzles: 15°, 25°, 40° and Soap
- Lance
- Down stream injector
- Spray gun

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 1yr Motor

FEATURES

- NEMA 4X electrical enclosure with rocker switch and hour meter
- 6.75 gal diesel fuel tank
- Wheel brake system
- 35' GFCI electrical cord
- Burner fuels: No. 1/No. 2 diesel or kerosene



65080

MODEL #	PART #	PRESSURE	FLOW	MOTOR	PUMP	DRIVE	DIESEL TANK	PRODUCT WEIGHT
DDM1030031A	65080	1000 GPM	3.0 PSI	2HP 120V 1Ø 21A	COMET	Direct	6.75 gal	425 lbs
DDM2040031B	65081	2000 GPM	4.0 PSI	5HP 230V 1Ø 21A	COMET	Direct	6.75 gal	467 lbs

PUMPS

COMET Industrial Triplex Pump

- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

- Heavy-duty 1-1/2" round tubular steel design
- Powder-coated for corrosion resistance

HOSE

- 3/8" x 50' steel-braided Armor Hose™

DIMENSIONS

All Units L 31" x W 55" x H 40"



CWE PORTABLE SERIES - HOT/COLD

The Delco® CWE Portable Series represents electrically powered, enclosed cabinet-style cold water washers. Each model is equipped with a belt-drive premium triplex plunger pump, featuring high-temperature seals capable of handling water temperatures up to 160° F. This series combines compact design and user-friendly operation, making it an excellent choice for your cleaning needs.

UNIT INCLUDES

- Hose
- Lance
- Spray gun
- Nozzles: 15°, 25°, 40° and Soap
- Down stream injector

LIMITED WARRANTY

All Units 10yr Frame, 5yr Pump, 1yr Motor

FEATURES

- Automatic start/stop feature
- Built-in hour meter
- Belt driven slow speed industrial triplex pump
- High temperature, water feed capable up to 165° F
- Removable handle and wheels
- Burner fuels: No. 1/No. 2 diesel or kerosene

Optional Accessories (sold separately and available upon order)

- 7114012 - Wall mount stand



65165

MODEL #	PART #	PRESSURE	FLOW	MOTOR	PUMP	DRIVE	FRAME	PRODUCT WEIGHT
DFM2040041B	65166	2000 PSI	4.0 GPM	5HP 230V 1Ø 21A	COMET	Belt	Steel	302 lbs
DFM2010041C	65164	2000 PSI	10.0 GPM	15HP 230V 3Ø 35A	COMET	Belt	Steel	370 lbs
DFM3040041D	65165	3000 PSI	4.0 GPM	7.5HP 460V 3Ø 19A	COMET	Belt	Steel	354 lbs
DFMSS3040041D	65179	3000 PSI	4.0 GPM	7.5HP 460V 3Ø 19A	COMET	Belt	Stainless Steel	354 lbs
DFM3050041C	65292	3000 PSI	5.0 GPM	10HP 230V 3Ø 25A	UDOR®	Belt	Steel	385 lbs

PUMPS

COMET Industrial Triplex Pump

- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

FRAME

- Compact frame for easy storage
- Steel frames are powder-coated for corrosion resistance

HOSE

- 3/8" x 50' steel-braided Armor Hose™

COVER

- Steel powder-coated panel cover

DIMENSIONS

All units L 35" x W 31" x H 36"

MOBILE TRAILER SERIES - HOT

INDUSTRIAL

DELCO® PRESSURE WASHERS

The Delco® Mobile Trailer series represents self-sufficient cleaning powerhouses. These portable Mobile Trailers are ingeniously engineered to harness the power of Delco machines, providing effective cleaning solutions even in locations where water supply is scarce. This makes them an ideal choice for job sites with limited resources.

UNIT INCLUDES

- Hose
- Nozzles
- Lance
- Downstream injector
- Spray gun

LIMITED WARRANTY

ALL UNITS 10yr Frame, 5yr Pump, 3yr Engine

FEATURES

- 1750 RPM slow speed
- 1- 200' high-pressure hose reel with 100' high-pressure hose
- 1-200' supply hose reel with 90' supply hose
- Translucent polyethylene water supply tank with easy to read water level indicators
- Jack with swivel wheel for easy maneuvering
- 3500 lb. axle with leaf spring suspension for a smooth ride
- Electric brake system
- Burner fuels: No. 1/No. 2 diesel or kerosene



95101



MODEL #	PART#	PRESSURE	FLOW	ENGINE	PUMP	AXLE RATING	WATER TANK SIZE	TIRE	PRODUCT WEIGHT
DTRS23555331E ¹	95100	3500 PSI	5.5 GPM	VANGUARD® 570cc*	COMET	3500 lbs. Rated Single	225 gal. with Steel Straps and Drain Petcock	14" w/6-ply	1500 lbs
DTRS23555251E ¹	95101	3500 PSI	5.5 GPM	HONDA® GX690* w/Recoil & Key-Start	General Pump®	3500 lbs. Rated Single	225 gal. with Steel Straps and Drain Petcock	14" w/6-ply	1500 lbs
DTRS24050251E ¹	95103	4000 PSI	5.0 GPM	HONDA® GX690* w/Recoil & Key-Start	General Pump®	3500 lbs. Rated Single	225 gal. with Steel Straps and Drain Petcock	14" w/6-ply	1500 lbs
DTRS24050331E ¹	95104	4000 PSI	5.0 GPM	VANGUARD® 570cc*	COMET	3500 lbs. Rated Single	225 gal. with Steel Straps and Drain Petcock	14" w/6-ply	1500 lbs
DTRS33555331E ¹	95107	3500 PSI	5.5 GPM	VANGUARD® 570cc*	COMET	4500 lbs. Rated Double	525 gal. with Steel Straps and Drain Petcock	16" w/6-ply	3500 lbs

MOBILE TRAILER SERIES - HOT

INDUSTRIAL

PUMPS

General Pump® Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

COMET Industrial Triplex

- 1750 RPM slow speed
- Thermal relief valve
- Forged brass head
- Heat-resistant ceramic plunger sleeves
- External unloader with bypass hose

HOSES

- 3/8" x 100' steel-braided Armor Hose™

High-Pressure Hose Reel

- Size: 200'

Supply Hose

- Size: 5/8" x 90'

Supply Hose Reel

- Standard - 200'

NOZZLES

- 4 quick connect nozzle tips: 15°, 25°, 40° and soap to use for a variety of cleaning applications

ADDITIONAL SPECS

Trailer Frame

- Rectangular thick wall steel tubing

Lighting

- LED

Trailer Hitch Ball Size

- 2" ball coupling

ADDITIONAL FEATURES

- Equipped with 48" toolbox
- 95107 equipped with 16 gal. chemical tank

ENGINES LOW OIL SHUTDOWN

ENGINE	DISPLACEMENT	FUEL TANK
HONDA® GX690	688cc	External
VANGUARD® 570cc	570cc	External

DIMENSIONS

95100, 95101, 95103, 95104	L 156" x W 68" x H 62" (with tongue)
95107	L 192" x W 90" x H 62" (with tongue)

¹ - This product is 49-State/EPA-Compliant. Not for sale in the state of California.

* - Indicates engine is equipped with low oil shutdown technology. Refer to page 32 for additional information.





Driven by **PERFORMANCE™**

Disclaimer of liability: In the preparation of this catalog, every effort has been made to offer the most current, correct, and clearly expressed information as possible. Nevertheless, inadvertent errors in information may occur and information may become outdated. In particular, but without limiting anything stated herein, FNA Group, Inc. disclaims any responsibility for errors and accuracy or timeliness of the information that may be contained in this catalog, also reserves the right to make changes to its product line at any time without notice. If misleading, inaccurate or otherwise inappropriate information is brought to our attention, a reasonable effort will be made to fix or remove it. Please contact us at 1-833-362-7368 with any concerns.

LEARN MORE AT **SIMPSONCLEANING.COM**