

# Product Range Overview

## 2025

**ELIET**<sup>®</sup>

  
MADE IN BELGIUM





# Table of Contents

4	Shredders
14	Scarifiers - Dethatchers
18	Overseeders
20	Sod Cutter
22	Spreader - Topdresser
22	Seeders
24	Edge Cutters
25	Edge Dresser
26	Blowers
27	Compact Multi-Vacuums



**ELIET®**

Prices valid from October, 2024 | Technical changes and equipment changes reserved. No rights can be derived from data or illustrations. At the time of publication of this catalog, all previous price lists lose their validity.

*the price list is valid until 30/06/2025*

# Shredders

## ELIET NEO

E



Shreddable timber diameter.....	<b>Neo:</b> 30 mm / 1-1/4" - <b>Neo2 &amp; Neo3:</b> 35 mm / 1-3/8"
Chopping speed (cuts/min).....	36.000
Capacity (wheelbarrows/h.).....	<b>Neo:</b> 6 - <b>Neo2:</b> 8 - <b>Neo3:</b> 10
Blades.....	RESIST™/6 (12 units)
Collecting box capacity.....	40 L / 10 gal.
Feeding height.....	<b>Neo:</b> 1140 mm / 46 inch - <b>Neo2 &amp; Neo3:</b> 1390 mm / 56"
Storage size (LxWxH).....	<b>Neo:</b> 600 x 600 x 750 mm / 28 x 24 x 30"
	<b>Neo2 &amp; Neo3:</b> 800 x 600 x 1000 mm / 32 x 24 x 40"
Weight.....	<b>Neo:</b> 40 kg / 88 lbs - <b>Neo2 &amp; Neo3:</b> 43 kg / 95 lbs

ART.	VERSION
MA 001 011 911	<b>NEO</b> 3.5 HP elec. 230 V/1~ (2500 W)
MA 001 011 912	<b>NEO<sup>2</sup></b> 4.0 HP elec. 230 V/1~ (3000 W)
MA 001 011 913	<b>NEO<sup>3</sup></b> 4.8 HP elec. 380 V/3~ (3500 W)
MA 001 001 032	NEO Accessory Poke
MA 001 001 035	NEO Accessory Collection bag
BU 401 100 102	NEO Set of spare blades RESIST/6 (12 units)

## ELIET MAESTRO CITY



Shreddable timber diameter.....	<b>City elektr. 230 V:</b> 35 mm /1-3/8" <b>City:</b> 40 mm / 1-1/2"
Chopping speed (cuts/min).....	36.000
Capacity (wheelbarrows/h.).....	10
Blades.....	RESIST™/6 (12 units)
Collection bag capacity.....	60 L / 16 gallon
Feeding height.....	1050 mm / 41"
Storage size (LxWxH).....	740 x 650 x 910 mm / 29 x 26 x 36"
Weight.....	<b>City elektr. 230 V:</b> 60 kg / 132 lbs <b>City:</b> 63 kg / 139 lbs

ART.	VERSION
MA 001 052 123	<b>Maestro City</b> 5.0 HP B&S XR 750
MA 001 052 912	<b>Maestro City</b> E-AC230V 4.0 HP Elect 1~/230V (3000 W)
MA 001 052 913	<b>Maestro City</b> E-AC380V 4.8 HP Elect. 3~/380V (3500 W)
MA 001 052 001	Multi purpose grating for wet greenwaste
BU 401 100 102	Set of spare blades RESIST/6 (12 units)

### COMPACT STORAGE

To easily transport the Maestro in the trunk of a vehicle, the hopper can be completely removed. This is done quickly and require no tools. This allows for very compact and space-saving storage after work.



### CLEAN WORK

The collection bag of the Maestro City has a capacity of 60 L / 16 gallon, and the collection bag of the Maestro Country has a capacity of 80 L / 21 gallon. It is made of sturdy textile with a hard, moldable plastic bottom. The bag slides seamlessly into the frame and ensures that all the shreds are collected. This keeps the environment around the shredder clean! Thanks to the wide handle, handling the filled collection bag is very easy.



### DIVERSITY

Thanks to its special shredding system, the ELIET Maestro can deal with not only thick branches but also fine pruning waste including that from hedges and shrubs with no problem. Also leafy-rich green waste from flower borders or vegetable gardens can be mixed in together. Even autumn leaves that have been collected up can be put through the shredder. Should anyone want to exclusively shred such moisture-rich green material, ELIET advises to replace the standard calibration sieve by an optional "multi-purpose grating for wet greenwaste" (Art. code MA 001 052 001) in order to prevent any clogging.

Standard calibration sieve



Multifunctional sieve for wet greenwaste

## ELIET MAESTRO COUNTRY



Shreddable timber diameter.....	45 mm / 1-3/4"
Chopping speed (cuts/min).....	36.000
Capacity (wheelbarrows/h.).....	14
Blades.....	RESIST™/6 (12 units)
Collection bag capacity.....	80 L / 21 gallon
Feeding height.....	1200 mm / 47"
Storage size (LxWxH).....	740 x 650 x 1050 mm / 29 x 26 x 41"
Weight.....	63 kg / 139 lbs

ART.	VERSION	
MA 001 053 124	<b>Maestro Country</b>	6.5 HP B&S XR 950
MA 001 053 913	<b>Maestro Country</b>	4.8 HP Elect. 380 V/3~ (3500 W)
MA 001 053 801	<b>Maestro Country E-DC</b>	4.5 HP battery (3200 W)
MA 001 052 001	Multi purpose grating for wet greenwaste (option)	
MA 001 001 051	Li-Ion battery (option) 56V - 5Ah	
MA 001 001 052	Li-Ion battery (option) 56V - 10Ah	
MA 001 001 050	Charger for Li-ion battery (option)	
BU 401 100 102	Set of spare blades RESIST/6 (12 units)	

## THE MAESTRO RANGE FROM ELIET



## THE FIRST BATTERY-POWERED SHREDDER!

The ELIET Maestro Country E-Power is the first battery powered shredder on the market. Thanks to the efficient ELIET shredding technology, the Maestro E-Power has the highest possible autonomy.

This shredder also offers a number of other advantages

- ▶ No gas/gas consumption
- ▶ Cordless
- ▶ Minimal maintenance



**EGO**  
POWER BEYOND BELIEF



**E-POWER**



## VIBRATION DAMPER

The Maestro Country is designed for larger urban gardens. The volume and thickness of grass clippings grows with each new garden year. To take advantage of the Maestro Country's performance, the engine base is mounted on vibration dampers. The blade shaft support bearing has a bushing on the end. In this way, excessive loads can be maximally absorbed and a long service life is assured.

## ELIET MINOR 4S



Shreddable timber diameter.....	50 mm / 2"
Chopping speed (cuts/min).....	45.000
Capacity (wheelbarrows/h.).....	16
Blades.....	RESIST™ /8.3 (18 units)
Feed intake opening.....	190 x 250 mm / 7 x 10"
Output chute <b>TURBO DISCHARGE™</b> .....	Impeller Ø295 mm / 12-1/2"
Weight.....	92 kg / 203 lbs

ART.	VERSION	
MA 002 013 922	<b>Minor 4S</b>	5.5 HP Elect. 380 V/3~ (4000 W)
MA 002 013 231	<b>Minor 4S</b>	6.0 HP Honda GP200
MA 002 013 132	<b>Minor 4S</b>	6.5 HP Vanguard 200
MA 002 013 206	<b>Minor 4S</b>	6.5 HP Honda GX200
BU 401 100 103		Set of spare blades RESIST™/6 (18 units)
BU 401 200 301		Set of spare blades RESIST™/8.3 (12 units)

## ELIET MAJOR 4S



Shreddable timber diameter.....	60 mm / 2-3/8"
Chopping speed (cuts/min).....	45.000
Capacity (wheelbarrows/h.).....	24
Blades.....	RESIST™/8.3 (20 units)
Feed intake opening.....	245 x 250 mm / 9 x 10"
Output chute <b>TURBO DISCHARGE™</b> .....	Impeller Ø 295 mm / 12-1/2"
Weight.....	135 kg / 298 lbs

ART.	VERSION	
MA 003 013 208	<b>Major 4S</b>	9.0 HP Honda GX270
MA 003 013 000	<b>Major 4S</b>	PTO*
BA 221 110 002		PTO (option)
BU 401 200 302		Set of spare blades RESIST™/8.3 (20 units)



PTO

4 SEASON  
shredder™

Bio-TECH Chips

#### THE ELIET 4S 'FOUR-SEASON' SHREDDERS

- Particularly suitable for all kinds of green waste. Pre-sorting is not necessary.
- Suction effect of green waste via feed hopper.
- Self-cleaning effect of discharge makes clogging virtually impossible.
- Clippings discharge via adjustable discharge chute.
- End result are fast composting chips.

#### BIOTECH™ CHIPS

- The cutting process according to the Chopping Principle™ strongly compresses and defibrillates the chips.
- These BioTech™ chips from ELIET therefore have favorable fiber structures that accelerate the decomposition process.
- After shredding, you obtain a high-quality mixture with optimal moisture content.

SCAN ME



MINOR 4S



SCAN ME



MAJOR 4S



## ELIET VECTOR 4S



Shreddable timber diameter.....	80 mm / 3"
Chopping speed (cuts/min).....	53.000
Capacity (m <sup>3</sup> chips/h.) / (ft <sup>3</sup> /h.).....	3.m <sup>3</sup>
Discharge height.....	RESIST™/8.3 (20 units)
Feed intake opening.....	520 x 540 mm / 21 x 21"
Output chute <b>TURBO DISCHARGE™</b> .....	Impeller Ø 325 mm / 13"
Weight.....	265 kg / 585 lbs - 350 kg / 771 lbs

ART.	VERSION	
MA 034 001 209	<b>Vector 4S STD</b>	13.0 HP Honda GX390
MA 034 010 209	<b>Vector 4S PRO</b>	13.0 HP Honda GX390
MA 034 020 209	<b>Vector 4S ZR</b>	13.0 HP Honda GX390
MA 034 030 209	<b>Vector 4S CC</b>	13.0 HP Honda GX390
MA 034 001 001	Infed speed control valve	
BU 401 200 302	Set of spare blades RESIST™/8.3 (20 units)	
MA 034 001 003	Bearing protection kit	

### SHREDDING TECHNOLOGY



## 4 VERSIONS



### VECTOR 4S STD

not self-propelled/ not self feeding

### VECTOR 4S PRO

not self-propelled/with feed roller

### VECTOR 4S (ZR) ON WHEELS

self-propelled on wheels/with feed roller

### VECTOR 4S (CC) CROSS COUNTRY

self-propelled on tracks/with feed roller

### ELIET TURBO DISCHARGE™



The ELIET Minor, Major & Vector are 4-season (4S) shredders that operate according to the Chopping principle™ and are equipped with the Turbo Discharge™ system. This suction turbine creates a kind of vacuum effect that sucks the green waste into the shredder and then blows the chips away via a rotating output chute. The permanent air flow of this turbo-generator permanently cleans the system so that clogging is virtually impossible.



# Prof 6

## ELIET PROF 6



Shreddable timber diameter .....	100 mm / 4"
Chopping speed (cuts/min).....	54.000
Capacity (m³ chips/h.) / (ft³/h.) .....	4 m³ / 475 kg / 1050 lbs
Discharge height .....	1800 mm / 6 ft
Output chute <b>TURBO DISCHARGE™</b> .....	Impeller Ø 325 mm / 13"
Dimensions .....	1780 x 830 x 1520 mm / 6 ft x 33" X 5 ft
Weight (On Wheels, Cross Country, On Road, PTO).....	361 kg/796 lbs   426 kg/940 lbs   419 kg/924 lbs   308 kg/ 679 lbs

ART.	VERSION	
MA 032 010 131	<b>Prof 6 On Wheels</b>	14.0 HP Vanguard 400
MA 032 020 131	<b>Prof 6 Cross Country</b>	14.0 HP Vanguard 400
MA 032 030 131	<b>Prof 6 On Road</b>	14.0 HP Vanguard 400
MA 032 040 000	<b>Prof 6 PTO*</b>	PTO version + Hydro + ABM
MA 032 010 821	<b>Prof 6 E-Power On Wheels</b>	7.0 kW - 48V DC Vanguard (Eco Eye™)
MA 032 020 821	<b>Prof 6 E-Power Cross Country</b>	7.0 kW - 48V DC Vanguard (Eco Eye™)

## ELIET PROF 6 MONSTER



B



Shreddable timber diameter .....	100 mm / 4"
Chopping speed (cuts/min).....	54.000
Capacity (m³ chips/h.) / (ft³/h.) .....	4 m³ / 475 kg / 1050 lbs
Discharge height .....	1800 mm / 6 ft
Output chute <b>TURBO DISCHARGE™</b> .....	Impeller Ø 325 mm / 13"
Dimensions .....	1780 x 830 x 1520 mm / 6 ft x 33" X 5 ft
Weight (On Wheels, Cross Country, On Road).....	370 kg/815 lbs   435 kg/959 lbs   428 kg/943 lbs

ART.	VERSION	
MA 032 010 113	<b>Prof 6 Monster On Wheels</b>	18.0 HP B&S Vanguard
MA 032 020 113	<b>Prof 6 Monster Cross Country</b>	18.0 HP B&S Vanguard
MA 032 030 113	<b>Prof 6 Monster On Road</b>	18.0 HP B&S Vanguard

### ABM-SYSTEM™

This ingenious system completely autonomously controls the input speed.

Optionally available for the Prof 6. (For Prof 6 PTO series)

### MAINTENANCE-FRIENDLY

Thanks to the motto "FAST PIT STOP," the machine was designed so that it can be disassembled in record time to access the parts to be serviced. No tools are required. This allows routine inspection or maintenance to be done quickly after each working day, this also makes it easier to do an important maintenance. This way, the machine always remains in excellent condition for best performance day after day.



ART.	OPTIONS (PROF 6 & PROF 6 MONSTER)
MA 032 001 001	ABM System™
MA 032 001 002	Infeed speed control valve
MA 029 001 004	Lifting hook (Prof 6/ Superprof)
MA 029 001 006	Chip catcher
MA 032 001 004	Bearing protection kit
MA 032 001 009	overrun brake kit Prof 6 CC
BA 221 110 002	PTO (option)
BU 401 300 202	Set of spare blades RESIST/8 (24 units)
MA 040 001 000	ELIET Big Hands™ - Leaf gripper



**BIG HANDS™**

With this ELIET gripper you can clear all your **green waste efficiently and ergonomically** in no time. The gripper has a light weight (21 kg) and is very easy to operate. So you can quickly clear large volumes of leaves, moss, grass... without having to make physically strenuous efforts.



[www.bighands.com](http://www.bighands.com)



**PROF 6**

**On Wheels**  
Self-propelled - wheels



**PROF 6**

**Cross Country**  
Self-propelled - tracks



**PROF 6**

**On Road**  
On trailer



**PROF 6**

**PTO**  
on PTO



**PROF 6 ePOWER**

Available in Cross Country & On Wheels

# Super Prof

## ELIET SUPER PROF



Shreddable timber diameter.....	130 mm / 5"
Capacity (m3 chips/h.) / (ft3/h.).....	6/210
Blades.....	RESIST™/8 (24 units)
Discharge system calibration.....	calibration screen & AXELERO™ Ø 300 mm / 12"
Output chute.....	280° rotatable discharge chute
.....	two-part directional discharge deflector
Weight (On Wheels, Cross Country, On Road).....	437 kg / 964 lbs   502 kg / 1107 lbs   495 kg / 1092 lbs

ART.	VERSION	
MA 029 040 113	<b>Super Prof On Wheels</b>	18.0 HP B&S Vanguard
MA 029 050 113	<b>Super Prof Cross Country</b>	18.0 HP B&S Vanguard
MA 029 070 113	<b>Super Prof On Road</b>	18.0 HP B&S Vanguard
BU 401 300 202	Set of spare blades RESIST™/8 (24 units)	
MA 040 001 000	ELIET Big Hands™ - Leaf gripper	



## 30 YEARS SuperProf - Special Edition

The ELIET Super Prof Limited Edition is an exceptional shredder, specially designed to celebrate its 30th anniversary. This unique version combines the trusted power and performance of the Super Prof with exclusive extras that truly make it stand out, including work lighting and a sparkling finish.



### ECO EYE™

This technology detects when the machine is not shredding. At such a non-productive moment, the system automatically switches the engine from full throttle to idle. This not only greatly reduces emissions and fuel consumption, but also has a beneficial effect on the shredder's overall noise level.

As soon as the built-in infrared sensor detects the operator again for input, full shredding power is made available again in a fraction of a second. With Eco Eye™, ecology and economy go hand in hand.



# Super Prof **MAX**

ELIET SUPER PROF **MAX**



Eco Eye™	.....standard
Shreddable timber diameter	.....130 mm / 5"
Capacity (m3 chips/h.) / (ft3/h.)	.....6.5/230
Blades	.....RESIST™/10 (24 units)
Discharge system	.....calibration screen & AXELERO™ Ø 300 mm / 12"
Output chute	.....280° rotatable discharge chute
	.....two-part directional discharge deflector
Weight	.....441 kg / 973 lbs   506 kg / 1116 lbs   499 kg / 1100 lbs

ART.	VERSION
MA 029 040 125	<b>Super Prof MAX On Wheels + Eco Eye™</b> 23.0 HP B&S Vanguard <b>EFI</b>
MA 029 050 125	<b>Super Prof MAX Cross Country + Eco Eye™</b> 23.0 HP B&S Vanguard <b>EFI</b>
MA 029 070 125	<b>Super Prof MAX On Road + Eco Eye™</b> 23.0 HP B&S Vanguard <b>EFI</b>
BU 401 301 000	Set of spare blades RESIST™/10 (24 units)

ART.	ACCESSORIES (SUPER PROF EN SUPER PROF MAX)
MA 029 001 001	Eco Eye System
MA 029 001 002	Agriculture tyres (supplementary price)
MA 029 001 003	Infeed speed control valve
MA 029 001 004	Lifting hook
MA 029 001 005	Parking brake for Super Prof CC
MA 029 001 006	Chips catcher
MA 029 001 007	Special grating (honeycomb holes 30 mm) bottom part
MA 029 001 008	Special grating (honeycomb holes 30 mm) upper part
MA 029 001 009	Special grating (honeycomb holes 35 mm) bottom part
MA 029 001 010	Special grating (honeycomb holes 35 mm) upper part
MA 029 001 011	Multi purpose grating for wet greenwaste
MA 029 001 012	Kit bearing protecting shells for fibrous material
MA 029 001 013	Palm fronds grating



3 VERSIONS



**SUPER PROF (MAX)**  
On Wheels  
Self-propelled on wheels



**SUPER PROF (MAX)**  
Cross Country  
Self-propelled on wheels



**SUPER PROF (MAX)**  
On Road  
Trailer



# Mega Prof

**ALL-ROUND SHREDDER FOR FULL SEASON**



230 cm  
9'05'

Example with mechanical trailer brake of the Mega Prof gasoline

Overrun brake only with  
MA 018 011 137

work lights rear bumper

**HITCH UP AND GO!**  
ELIET holds the flag high as the inventor of self-propelled shredders. The concept of the self-propelled shredder offers the ideal solution for horticultural companies and is at the same time extremely practical for the professional gardener who prefers to use towed models. Despite its high capacity, the Mega Prof is a flexible towed model. A working environment such as public grounds, parks, cemeteries, landscape gardens and wooded areas is usually easily accessible, making the Mega Prof in his. The On Road version is ideal.

**IRRESISTIBLE**  
With its Mega Prof, ELIET has an absolutely all-purpose shredder that will delight many garden contractors and municipalities. The unique ELIET Chopping Principle™ in combination with a powerful 25 hp diesel or 37 hp gas engine guarantees an amazing efficiency with a capacity of up to 15 cm/ 6". To fully utilize this shredding capacity, particular attention was paid to the comfort and ergonomics of the feeder. The machine is also equipped as standard with the innovative Eco Eye™ system. This ensures minimum consumption, low emissions and low noise levels. Thus, ecology, ergonomics and economy go hand in hand.

**<750**  
**Kilogram**  
**<1650 lbs**



Eco Eye™	.....standard
Shreddable timber diameter	.....150 mm / 6"
Capacity (m³ chips/h)	.....10/350
Blades	.....RESIST™/10 (24 units)
Discharge System	.....calibration screen & AXELERO™ Ø 300 mm / 12"
Output chute	.....280° rotatable discharge chute
	.....two-part directional discharge deflector
Weight	.....748 kg / 1649 lbs



ART.	VERSION	
MA 018 011 340	MEGA PROF On Road + Eco Eye™	25.0 HP Kubota diesel
MA 018 011 137	MEGA PROF On Road + Eco Eye™	37.0 HP B&S Vanguard EFI
MA 018 001 018	Special grating (honeycomb holes 35 mm) lower part	
MA 018 001 019	Special grating (honeycomb holes 35 mm) upper part	
MA 018 001 020	Multi purpose grating for wet greenwaste	
MA 029 001 006	Chips catcher	
MA 018 001 021	Working light in rear bumper	
MA 018 001 022	Collision protection	
BU 401 301 000	Set of spare blades RESIST™/10 (24 units)	
MA 018 001 023	Palm fronds grating	



**VANGUARD EFI** GASOLINE

*The ELIET Mega Prof is also available with the Vanguard EFI two-cylinder gasoline engine. EFI refers to "electronic fuel injection." This controlled fuel injection is linked to the engine load.*

**THIS PROVIDES THE FOLLOWING BENEFITS**

- higher torque, more power under load  
a more constant number of revolutions
- 25% less fuel consumption
- more efficient combustion, fewer emissions  
no more choking
- less noise
- carburetor problem during transport is eliminated

This convincing "green waste eater" is already extremely efficient and economical due to the unique ELIET shredding system. The modern EFI engine technology brings these advantages even better into practice and makes the machine even more powerful!



**KUBOTA** DIESEL

*Professionals often prefer the diesel engine because of its durability and higher torque.*

For the Mega Prof, ELIET has chosen the reliable Kubota diesel engine. The water-cooled three-cylinder has 25 hp. A particulate filter is also available as an option.



## Scarifiers - Dethatchers

### ELIET E401



Operating width.....	400 mm / 16"
Permanently Sharp Blades™ PSB™.....	Yes - min. 100 hrs.
fixed, loose, Double-Cut - blades (number   thickness).....	14   3 mm / 0.12" - 26   2.5 mm / 0.1" - 24   1.5 mm / 0.06"
Depth adjuster.....	front + back
Vertical belt tension.....	Yes
Collection bag (standard) (excl. ECOLINER).....	60 L - 16 gallons
Weight.....	40 kg / 88 lbs

ART.	VERSION		
MA 007 040 902	<b>E401</b> fixed blades ECO LINER	3.0 HP elect. Mono 2200 W	
MA 007 040 121	<b>E401</b> fixed blades ECO LINER	4.0 HP B&S Series 550	
MA 007 010 230	<b>E401 STD</b> fixed blades PSB™	5.0 HP Honda GP160	
MA 007 020 230	<b>E401 STD</b> loose blades PSB™	5.0 HP Honda GP160	
MA 007 030 230	<b>E401 STD</b> DC blades PSB™	5.0 HP Honda GP160	
MA 007 030 203	<b>E401 PRO*</b> DC blades PSB™	4.0 HP Honda GX120	
BU 402 100 101	Set of spare fixed blades (14 units)		
BU 402 200 101	Set of spare loose blades (26 units)		
BU 402 300 101	Set of spare Double-Cut blades (24 units)		
BU 402 300 202	Set of spare ECO LINER blades (24 units)		
BQ 348 080 010	Spare collection bag		
MA 007 001 002	Foldable handle for rental (supplementary price)		

### ELIET E450



Operating width.....	450 mm / 18"
Permanently Sharp Blades™ PSB™.....	Yes - min. 100 hrs.
fixed, loose, Double-Cut - blades (number   thickness).....	16   3 mm / 0.12" - 30   2.5 mm / 0.1" - 28   1.5 mm / 0.06"
Depth adjuster.....	front + back
Vertical belt tension.....	Yes
Collection bag (standard) (excl. ECOLINER).....	60 L - 16 gallons
Weight.....	51 kg / 112 lbs

ART.	VERSION		
MA 025 010 205	<b>E450 PRO</b> fixed blades PSB™	5.5 HP Honda GX160	
MA 025 020 205	<b>E450 PRO</b> loose blades PSB™	5.5 HP Honda GX160	
MA 025 030 205	<b>E450 PRO</b> Double-Cut blades PSB™	5.5 HP Honda GX160	
MA 025 030 802	<b>E450 E-Power</b>	4.5 HP battery 56V DC (3200 W)	
MA 025 001 001	Collection bag		
BU 402 100 203	Set of spare fixed blades (16 units)		
BU 402 200 203	Set of spare loose blades (30 units)		
BU 402 300 203	Set of spare Double-Cut blades (28 units)		

\* E401 Pro VM GX120 - Available while stocks of motor GX120 last



#### PERMANENTLY SHARP BLADES™, GET MORE OUT OF YOUR LAWN

Every ELIET scarifier is equipped as standard with the Permanently Sharp Blades™. A revolutionary technology gives the blades a self-sharpening effect so that they retain their point throughout their useful life.



New blade After 30 hours... After 60 hours... After 90 hours...

SCAN ME



#### FOLDABLE HANDLE

So the ELIET E401 and E450 will not take up much space in your garage or storage space, or in the trunk of your car.

## ELIET E501



Operating width.....	500 mm / 20"
Permanently Sharp Blades™ PSB™.....	Yes - min. 100 hrs.
fixed, loose, Double-Cut - blades (number   thickness).....	18   3 mm / 0.12" - 34   2.5 mm / 0.1" - 32   1.5 mm / 0.06"
Depth adjuster.....	front + back
Vertical belt tension.....	Yes
Weight.....	60 kg / 132 lbs

ART.	VERSION
MA 008 020 231	<b>E501 STD</b> fixed blades PSB™ 6.0 HP Honda GP200
MA 008 020 206	<b>E501 PRO</b> fixed blades PSB™ 6.5 HP Honda GX200
MA 008 030 206	<b>E501 PRO</b> loose blades PSB™ 6.5 HP Honda GX200
MA 008 040 206	<b>E501 PRO</b> Double-Cut blades PSB™ 6.5 HP Honda GX200
MA 008 001 001	Foldable handle for rental
BU 402 100 201	Set of spare fixed blades (18 units)
BU 402 200 102	Set of spare loose blades (34 units)
BU 402 300 102	Set of spare Double-Cut blades (32 units)

### SCAN ME



foldable handlebars



Wide protective cover made of robust rubber

Large aluminium rear wheels  
Ø250mm double ball bearings



OTHER

ELIET

### VERTICAL TIRING

To decouple the blades, ELIET does not use a classic tensioning pulley, which causes failure every so often. In contrast, ELIET developed the "vertical belt tensioning". Here, a lever mechanism lifts the motor plate, thereby tensioning the belt. This allows the belt to retain its natural shape even under load, which significantly increases its life span.

## ELIET E750



Operating width.....	750 mm / 30"
Permanently Sharp Blades™ PSB™.....	Yes - min. 100 hrs.
fixed, loose, Double-Cut - blades (number   thickness).....	25   3 mm / 0.12" - 48   2.5 mm / 0.1" - 44   1.5 mm / 0.06"
Depth adjuster.....	front + back
Vertical belt tension.....	Yes
Weight.....	80 kg / 176 lbs

ART.	VERSION
MA 009 010 207	<b>E750</b> fixed blades PSB™ 9.0 HP Honda GX270
MA 009 020 207	<b>E750</b> loose blades PSB™ 9.0 HP Honda GX270
MA 009 030 207	<b>E750</b> Double-Cut blades PSB™ 9.0 HP Honda GX270
MA 009 001 001	Tow behind model (supplementary price)
BU 402 100 202	Set of spare fixed blades (25 units)
BU 402 200 103	Set of spare loose blades (48 units)
BU 402 300 103	Set of spare Double-Cut blades (44 units)



**FB**  
fixed Blades



**LB**  
loose Blades



**DC**  
Double-Cut™ Blades



## Self-Propelled (ZR) Scarifiers / Dethatchers



### ELIET E450ZR - E550ZR - E650ZR




Operating width .....	450 - 550 - 650 mm   17" - 21" - 25"
Blades.....	Double-Cut blades (54 - 66 - 78 units)
Drive.....	rubber traction roller diam. 150 mm / 6"
Driving speed.....	2,5 km/h - 1,55 mph
Dimensions.....	1230 x 630 x 1050 mm - 1230 x 730 x 1050 mm - 1230 x 820 x 1050 mm
	48" x 25" x 42" - 48" x 29" x 42" - 48" x 32" x 42"
Weight.....	85 kg / 187 lbs - 93 kg / 205 lbs - 120 kg / 265 lbs

ART.	VERSION	
MA 037 010 205	<b>E450ZR</b> PSB™	5.5 HP Honda GX160
MA 037 010 802	<b>E450ZR DC E-Power</b> PSB™	4.5 HP battery 56V DC (3200 W)
MA 035 010 206	<b>E550ZR</b> PSB™	6.5 HP Honda GX200
MA 038 010 208	<b>E650ZR</b> PSB™	9.0 HP Honda GX270
MA 017 001 001	Easy clean (option)	
BU 402 100 454	Set of spare E450ZR Double-Cut blades (54 units)	
BU 402 100 400	Set of spare E550ZR Double-Cut blades (66 units)	
BU 402 100 478	Set of spare E650ZR Double-Cut blades (78 units)	



#### NO MORE CROSS DETHATCHING

With its self-propelled scarifiers, ELIET uses Double-Cut™ blades as standard. These are very thin blades that are only 15 mm - 5/8" apart. A single pass is sufficient to achieve maximum cleaning.

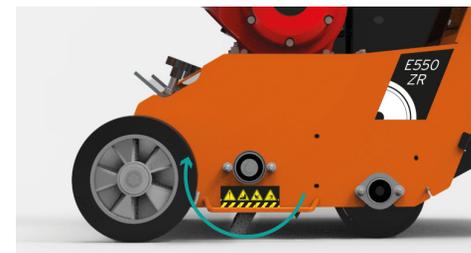

#### THE BLADES ROTATE AGAINST THE DIRECTION OF TRAVEL

The blades rake all the moss and thatch out of the turf even more efficiently. This is possible because they actually rotate against the direction of travel. Thanks to the wheel drive, it makes it easier for the operator.

# New Tech, New POWER

**EPOWER**



## The future is green

The EGO power source that provides the power for the ELIET E-Power machines is an integrated power cell. This is a combination of a 3200 W brushless DC motor and a docking station onto which two EGO 56 V Lithium-Ion batteries can be plugged.



BA2800T  
**5 AH**



BA5600T  
**10 AH**

Powered by



## TIME SAVINGS

The C550ZR Collector collects the moss-tatch on a narrow verge. At the next work strip, this pile can be picked up again by the machine and, together with the raked material from this second work strip, it can be deposited on the first work strip in a single pass.

C600 Compactor scarifies and collects in 1 pass. The collection system is unique and carries the moss-tatch from the blades via driven rollers to two counter-rotating rollers, which compress the moss-tatch.

## ELIET C550ZR COLLECTOR



Operating width.....	550 mm/ 21"
Blades.....	Double-Cut™ Blades (66 units)
Drive.....	rubber traction roller diam. 100 mm/ 4"
Driving speed.....	2,5 km/h - 1,55 mph
Discharge system.....	worm auger helix diam. 150 mm / 5"9"
Dimensions.....	1230 x 730 x 1050 mm / 48" x 29" x 42"
Weight.....	93 kg / 205 lbs

ART.	VERSION
MA 008 140 206	C550ZR COLLECTOR PSB™ 6.5 HP Honda GX200
MA 017 001 001	Easy clean (option)
BU 402 100 400	Set of spare C550 Double-Cut blades (66 units)



**AGRIBEX 2019 Silver Boxwood** ▲

SCAN ME



## C600 Compactor



**COMING SOON**

A new model of the C600 Compactor will be available soon!


# DZC Overseeders

## ELIET DZC 450



Operating width.....	450 mm / 17"
Blades.....	45
Drive.....	rubber traction roller diam. 100 mm/ 4"
Driving speed.....	2 km/h / 1.2mph
Operating depth.....	Recommended 8 to 10 mm / 0.3" to 0.4"
Groove spacing.....	27 mm / 1" inches
Seed container.....	50 L / 13 gallon
Weight.....	125 kg / 275 lbs

ART.	VERSION
MA 033 010 206	DZC 450 PSB™ 6.5 HP Honda GX200
MA 033 001 001	Seed collector DZC 450
BU 402 300 145	Set of STD spare blades (45 units) PSB™ (incl. nuts and bolts)

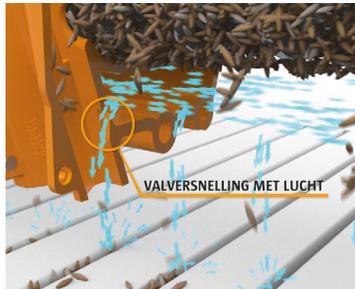

### BLOWN-IN TECHNOLOGY


A small turbine blows air into the seed distribution system. The seed receives an additional blast of air that blows it deep into the seed bed.



### TOPDRESS ROTOR™

The projection stream of residual soil is pulverized and accelerated by a rubber topdress rotor. This spreads the soil evenly as a top dressing over the seed bed.

SCAN ME

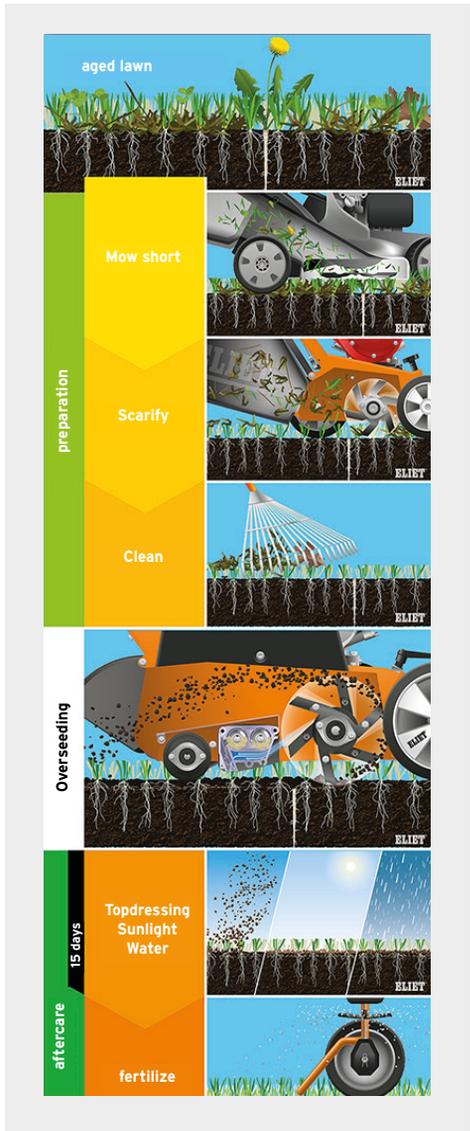

## ELIET DZC 600



Operating width.....	600 mm / 24"
Blades.....	38
Aandrijving.....	rubber traction roller Ø 150 mm/ 3"
Driving speed.....	2,5 km/h - 1,55 mph
Operating depth.....	Recommended 8 to 10 mm / 0.3" to 0.4"
Groove spacing.....	27 mm / 1"
Seed container.....	55 L / 14,5 gallon
Weight.....	129 kg / 284 lbs

ART.	VERSION
MA 028 020 207	<b>DZC 600 PSB™</b> 9.0 HP Honda GX270
MA 028 001 004	Seed collector DZC 600 (from model 2016 to 03/2023) (option)
MA 028 001 001	Seed collector DZC 600 (model 2014 & 2015)
BU 402 303 357	set of spare Tungsten tipped blades (57 units) (incl. nuts and bolts)
BU 402 300 157	set of STD spare blades (57 units) PSB™ (incl. nuts and bolts)
BU 402 303 338	set of spare Tungsten tipped blades (38 units) (incl. nuts and bolts)
BU 402 300 138	set of STD spare blades (38 units) PSB™ (incl. nuts and bolts)



AGRI BEX 2013 Golden buxus ▲

### HELIX SEED DUCT™ SYSTEM

Like no other overseeder, the ELIET DZC succeeds in delivering the grass seed into the soil in a very targeted manner. The patented seed distribution system leads the seed straight into the slits. The seed is in optimal conditions for rapid germination. Success assured!

ELIET Helix Seed Duct™



## ELIET DZC 750




Operating width.....	750 mm / 29"
Blades.....	48
Operating depth.....	Electric roller drive.....
Seed container.....	Hydrostatic
Weight.....	46 L / 12 gallon
	400 kg / 881 lbs

ART.	VERSION
MA 016 020 218	<b>DZC 750 HST PSB™</b> 13.0 HP Honda GX390 (Hydrostatic)
MA 016 001 006	Seed collector DZC 750 (option)
BU 402 101 000	set of spare blades (24 units) PSB TM (incl. nuts and bolts)

SCAN ME



## New DZC600

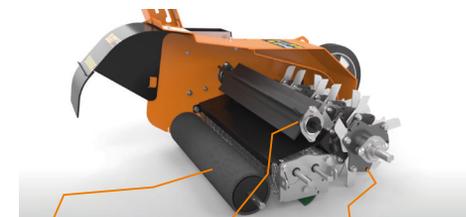

Large roller

Topdress-Rotor™

Tungsten blades

# Sod Cutter



### OPTIMAL GRIP

Turf cutting is preferable when the ground is wet. The tracks have a larger contact surface with the soil that provides maximum grip and better traction.

The superior grip of the tracked undercarriage allows a sod 60 cm - 24" wide to be loosened in one pass (which can be immediately cut lengthwise down the middle) in order to create two 30 cm - 12" strips.

## Turfaway On wheels

Turfaway with hydrostatic 4x4 drive.



### BEST MANEUVERABILITY

The drive of the tracks is hydrostatic. The travel speed of each track can be infinitely controlled, allowing the machine to take turns smoothly and even turn on its axis.

### BEST OPERATING COMFORT

Operating the Turfaway is child's play. The left hand operates the clutch for traction and blade drive. The right hand is free to steer the machine via a centrally located joystick. To bring the cutting blade to working depth, one appeals to the strength of the leg muscles because this is done with the foot. The handlebar has vibration dampers to increase operator comfort.

### BEST CUTTING

In order to cut thin contiguous sod, the blade was placed behind the tracks. When cutting loose, the sod can move freely and is no longer pressed by the machine. Thanks to the eccentric drive, the blade makes fine oscillating movements. This makes it easier to maintain the depth. The working depth can be adjusted quickly and easily with one lever and a clear diagram.

### MOST EFFICIENT

With a 60 cm - 24" wide blade, the Turfaway has the largest working width on the market for self-propelled sod cutters as standard. The extra grip of the tracks ensures that the machine performs well in all conditions. The blade can be adjusted at an angle so that, depending on soil conditions, sod can be removed as needed.

SCAN ME



## ELIET TURFAWAY 600



Operating width.....	600 mm / 24"
Oscillations.....	800/min
Stroke.....	38 mm / 1.5"
Footprint machine.....	960 cm <sup>2</sup>
Depth adjuster.....	0 up to -60 mm / 0 up to -2"
Weight (OW/CC).....	230 kg / 507 lbs   195 kg / 430 lbs
Traction (OW/CC).....	Hydraustatic (4x4 / wheels or tracks)

ART.	VERSION
MA 031 020 206	TURFAWAY 600 On Wheels 6,5 HP Honda GX200 (Hydrostatic)
MA 031 010 206	TURFAWAY 600 Cross Country 6.5 HP Honda GX200 (Hydrostatic)
MA 031 001 001	Weight support
BG 601 002 000	Supplementary front weight (per unit of 20 kg - 44 lbs)
BU 105 041 150	STD Turf Away 600 Split blade (30/30 cm)

# Spreader - Topdresser

**NEW!**

## Professional topdressing solution!



### ELIET ECOCURE

**EcoCure**
**B**


Spreading width.....	8 m / 26 feet
Hopper Volume.....	400 L / 106 gal - Optional extension to 600 L / 158 gal
Spreading Mechanism .....	2 x Spindle Ø 380 mm / 15"
Driving Speed (Forward - Reverse).....	4.5 km/h / 2.8 mph
Dimensions .....	2500 x 900 x 1030 mm / 99 x 36 x 41"
Weight (dry).....	458 kg / 1010 lbs

**ART.**
**VERSION**

MA 024 001 209	<b>EcoCure ZR WS</b>	13.0 HP Honda GX390
MA 024 200 209	<b>EcoCure ZR DS</b>	13.0 HP Honda GX390
MA 024 001 004	<b>Extended edges for hopper</b>	

### SPREADING DISCS

The spreading material is dispersed by two hydraulically powered spreading discs (380 mm / 15" diameter) that distribute it widely. With a spreading width of up to 8 meters (26 feet), the EcoCure™ can handle a wide range of lawn additives, including coarse or fine compost, sand, granular or powdered lime, as well as fertilizer. The machine is also suitable for spreading salt in winter.

### CONVEYOR BELT WITH AGITATOR

At the bottom of the conical hopper, a 450 mm / 17" wide conveyor belt transports the topdressing material to the spreading mechanism and the conveyor belt is hydraulically powered. The material flow can be regulated by both the belt speed and the adjustable opening beneath the guillotine slide. Just before the dispensing outlet, an agitator mill rotates to continuously loosen the material, preventing clumping and bridging.

### FULLY HYDRAULIC DRIVE SYSTEM

ELIET chose to equip the EcoCure™ with maintenance-free hydraulic drives. The machine includes a large 15 L / 13 gal oil reservoir, ensuring the hydraulic system operates at a consistently low temperature, guaranteeing optimal performance of this topdresser in all conditions.

### STEERING SYSTEM WITH INTUITIVE CONTROL PANEL

All controls are within easy reach on a clear, integrated dashboard. The drive system is fully hydrostatic, offering infinitely variable speed control in both forward and reverse directions. This allows for topdressing while driving forward or backward. A lever enables proportional adjustment of the conveyor belt speed in the hopper and the spreading discs. A simple adjustable stop lets operators quickly and accurately return to a pre-set flow rate when switching the drive on and off (e.g., when turning at the end of a stroke).

### ELIET ECOCURE™ ZR WS

The EcoCure™ ZR WS is a broadcast spreader. The material flow lands on fast-rotating discs that use centrifugal force to spread it evenly over a wide area. The spreading width is adjustable by proportionally controlling the disc rotation speed, allowing for precise overlap management and preventing waste in narrow passages. Despite its compact design, the EcoCure™ ZR WS features a spacious hopper with a capacity of 400 liters, expandable to 600 liters with optional extensions.

### COMPACT DESIGN

This professional topdresser is versatile enough for both large lawns and smaller private gardens. With a width of just 900 mm, the EcoCure™ easily fits through most passages, enabling greenkeepers to efficiently topdress even hard-to-reach areas.



# Seeders GZC

## ELIET GZC 750



Operating width.....	720 mm / 28"
Engine.....	Honda
Power.....	6,5 HP
Harrow (number of teeth).....	13.
Seed collector.....	61 L / 16 gallons
Weight.....	385 kg / 849 lbs

ART.	VERSION
MA 016 011 206	<b>GZC 750 HST</b> 6.5 HP Honda GX200 (Hydrostatic)
BG 601 002 000	Supplementary front weight (per unit of 20 kg - 44 lbs)
MA 016 001 022	Step
MA 016 001 016	Seed collector GZC 750
MA 016 001 011	Flat rear roller (supplementary price)
MA 016 001 021	Front roller scraper
MA 016 001 019	Rear roller scraper



### (1<sup>ST</sup> PASS)

#### PREPARING SEED BED

1. Crumble
2. Finely lay top layer
3. Levelling the top layer
4. Stabilizing soil

### (2<sup>ND</sup> PASS)

#### SEEDING

1. Levelling
2. seeding
3. Spreading
4. Compacting



## ELIET GZC 1000



Operating width.....	1,040 mm / 41"
Engine.....	Honda
Power.....	9 HP
Harrow (number of teeth).....	21
Seed collector.....	90 L / 24 gallons
Weight.....	415 kg / 915 lbs

ART.	VERSION
MA 016 011 208	<b>GZC 1000 HST</b> 9.0 HP GX270 (Hydrostatic)
BG 601 002 000	Supplementary front weight (per unit of 20 kg - 44 lbs)
MA 016 001 023	Step
MA 016 001 017	Seed collector GZC 1000
MA 016 001 010	Flat rear roller (supplementary price)
MA 016 001 020	Front roller scraper
MA 016 001 018	Rear roller scraper

SCAN ME



### HYDROSTATICALLY DRIVEN ROLLERS

The hydrostatic drive allows stepless adjustment of working speed and switching from forward to reverse without disengaging.



### INTUITIVE STEERING

Simply moving the handlebar sideways directs the drive to the front rollers and provides zero-turn maneuverability.



### TINES

The heart of the GZC are the tines. It consists of two rows of tines that move back and forth, left to right. The working depth of the harrow can be adjusted to a maximum of 7 cm in depth.

The tines has two speeds. It takes care of the three essential operations: top dressing, leveling the terrain, incorporation of grass seed.

## Edge Cutters

### ELIET KS 240 STD



Blade.....	∅ 240 mm / 9"
Blade speed.....	2550 rpm
Angle adjuster.....	0° - 25° - 45°
Depth adjuster.....	7 positions - max. 80 / 3" 1/8
Weight.....	34 kg / 75 lbs

ART.	VERSION
MA 010 010 121	<b>KS 240 STD</b> 4.0 HP B&S Series 550
MA 010 010 230	<b>KS 240 STD</b> 5.5 HP Honda GP160
MA 010 001 002	Double front wheels KS 240 STD
BU 103 200 100	8 teeth cutting disk KS 240 STD (∅ 240 mm)
BU 103 100 100	Spare blade KS 240 STD (∅ 240 mm)

### ELIET KS 300 PRO + KS 300 PRO HD



Blade.....	∅ 300 mm / 12"
Blade spindle.....	double bearing PRO: ∅ 40, PRO HD: ∅ 70 mm / 3"
Angle adjuster.....	0° - 25° - 45°
Depth adjuster.....	<b>PRO: 5 positions - PRO HD: 15 positions max. 110 mm / 4"</b>
Height adjustable handle.....	7 positions
Weight.....	<b>PRO: 37 kg / 81 lbs - PRO HD: 37 kg / 81 lbs</b>

ART.	VERSION
MA 010 020 203	<b>KS 300 PRO*</b> 4.0 HP Honda GX120
MA 010 020 205	<b>KS 300 PRO</b> 5.5 HP Honda GX160
MA 010 020 802	<b>KS 300 PRO E-Power</b> 4.5 HP battery 56V DC (3200 W)
MA 010 022 205	<b>KS 300 PRO HD (Heavy Duty)</b> 5.5 HP Honda GX160
MA 010 001 003	Double font wheels KS 300 PRO / HD
BU 103 200 200	8 teeth cutting disk KS 300 PRO (Mn-steel) (∅ 300 mm)
BU 103 100 200	Spare blade (∅ 300 mm)

#### HEIGHT-ADJUSTABLE HANDLEBAR

For optimum working comfort, the Pro/Pro HD edger has a 7-position height-adjustable handlebar.



#### BLADE ANGLE ADJUSTMENT

To cut away overgrown grass without damaging the shape of the edge, the blade can be angled.



#### POSITION OF THE FRONT AXLE

Even curves of creative lawns can be mowed perfectly with the ELIET edge cutter. With this, the axis of the front wheel has been precisely aligned with the shaft of the blade. As a result, the blade follows a radius of rotation proportional to the curve one takes with the front wheel. This allows the operator to follow the curves of the lawn in a much more targeted way.



SCAN ME



# Edge Dresser

## ELIET EDGE STYLER



Blade speed .....1000 cycl/min.  
 Depth adjuster ..... depending on blade type  
 Driving speed ..... (0.9 km/h.)  
 Adjustable steering ..... **PRO:** angle and height  
 Weight ..... 94 kg / 207 lbs

ART.	VERSION	
MA 022 020 203	<b>EDGE STYLER PRO*</b>	4.0 HP HONDA GX120
MA 022 020 121	<b>EDGE STYLER PRO</b>	4.0 HP B&S XR550
MA 022 021 203	<b>EDGE STYLER PLUS PRO*</b>	4.0 HP HONDA GX120
MA 022 021 121	<b>EDGE STYLER PLUS PRO</b>	4.0 HP B&S XR550
MA 022 001 002	Wire trencher kit (contains blade)	
MA 022 001 005	Weight support	
BG 601 002 000	Supplementary weight (per unit of 20 kg - 44 lbs)	
MA 010 001 006	Edge cutting kit (reciprocating blade)	
BU 104 100 100	STD blade type1 V	
BU 104 100 200	STD blade type2 VV	
BU 104 100 300	STD blade type3 VVV	
BU 104 100 400	STD blade type4 VVVV	
BU 104 100 500	STD blade type5 VVVVV	
BU 104 101 100	Straight blade	
BU 104 102 100	U shaped blade 35mm	
BU 104 102 200	U shaped blade 50mm	
BU 104 103 100	Angular blade type1 V	
BU 104 103 200	Angular blade type2 VV	
BU 104 103 300	Angular blade type3 VVV	
BU 104 104 100	Wedge blade	
BU 104 103 400	Golf bunker blade	
BU 104 104 202	Wire trenching blade 50 mm	
BU 104 104 300	Replacement reciprocating blade	

SCAN ME



### BLADE SELECTION



STD blade



Straight blade



U shaped blade



Angular blade



Wedge blade



Wire trenching blade



Golf bunker blade



Reciprocating blade

\*\* PLUS Edge Styler machine mounted with rotary table kit

+ holder for weights

## Compact Multi-Vacuums

### ELIET TRUCKLOADER TL 450 PRO



Airflow.....	108 m <sup>3</sup> /min. / 3200 ft <sup>3</sup> /min
Noise Lw(A).....	112 dB (A)
Impeller.....	Ø 380 mm / 15"
Weight.....	125 kg / 275 lbs   132 kg/ 291 lbs   140 kg/ 308 lbs   145 kg/ 319 lbs

ART.	VERSION	
MA 027 010 208	<b>TL Pro 450</b>	9.0 HP Honda GX270 (incl. easy handle)
MA 027 010 209	<b>TL Pro 450</b>	13.0 HP Honda GX390 (incl. easy handle)
MA 027 010 113	<b>TL Pro 450</b>	18.0 HP B&S Vanguard ES (incl. electric start & easy handle)
MA 027 010 117	<b>TL Pro 450</b>	23.0 HP B&S Vanguard ES (incl. electric start & easy handle)
MA 015 001 012		Suction hose extension kit 3.5 m (Ø200 mm) + couplings (option)
MA 027 001 001		Electric start
MA 027 001 004		Blow chute extension (L+300mm, H+300mm) (supplementary price)

### ELIET TRUCKLOADER TL 450 PRO HD



Airflow.....	108 m <sup>3</sup> /min. / 3800 ft <sup>3</sup> /min
Noise Lw(A).....	105 dB (A)
Transmission.....	belt drive
Discharge chute.....	INOX rotatable 360° - Ø 8"
Ergonomic handle.....	Yes
Emergency Stop.....	brake on impeller
Weight.....	160 kg / 352 lbs

ART.	VERSION	
MA 015 010 113	<b>TL Pro HD 450</b>	18.0 HP B&S Vanguard ES (electric start)
MA 015 001 012		Suction hose extension kit 3.5 m (Ø200 mm) + couplings (option)
MA 015 001 004		Special trailer (option)
MA 015 001 005		Supportchassis with wheels (option)
MA 015 001 006		Supportchassis with wheels and liftingsystem (option)
MA 015 001 007		Blow chute extension (L+300mm, H+300mm) (supplementary price)
MA 015 001 011		Flexible chute extension + centering device (option)
MA 015 001 013		Stainless steel turbine wear protection plate



#### OPTIONAL WITH TL 450 PRO HD

- Trailer for transportation,
- Discharge chute extension
- centered flexible discharge chute extension


#### THE SPECIALIST IN WASTE PROCESSING

The ELIET Truckloader has been tailored to the needs of the intensive user down to the smallest detail. With the ELIET Truckloader you can count on a reliable, solid, ergonomic machine with a guaranteed low maintenance cost.





**360° ROTATING OUTPUT CHUTE**



**ADJUSTABLE DEFLECTOR**



**1. BELT DRIVE**

Belt driven to avoid tension on crankshaft.

**2. BRAKE SYSTEM - EMERGENCY STOP SWITCH**

ELIET has designed an ingenious system that surprises by its simplicity and ensures that when the V-belt is released, the bucket wheel is automatically braked at the same time. This significantly increases the safety level of the machine, since it is not the engine but the clutch that is disengaged in the event of a possible risk. This reduces the need to start the engine and extends the life of the starter motor.



**1. QUICKLY REMOVABLE FRONT DOOR**

The ELIET Truckloader has special screws on the outside of the turbine that can be removed in no time for cleaning.

**2. QUICK CLEANING VALVE**

When a lot of sludge and mud has been vacuumed up, this material saddle in the lower part of the turbine, forming a cake of earth. Therefore, ELIET has equipped the lower part of the unit with a cleaning door so that the turbine can be easily rinsed out with a garden hose.



**DOUBLE CONICAL STEEL WHEEL**

The blade wheel is made of 6 mm thick, high-quality Hardox steel and is highly resistant to material being sucked up such as stones, sand or earth.



**SOUND-ABSORBING TURBINE WALL**

Every leaf and stone sucked in makes its way through the suction hose and strikes the impeller. The centrifugal forces hurl the material against the turbine wall, from where it is spiraled to the blower nozzle. In this process, the turbine housing can be imagined as a noise-producing vessel. For sound insulation, ELIET has covered the housing with a rubber sheath and thus greatly reduced the noise level.



**SWINGHANDLE™**

Transparent suction hose and lightweight Swinghandle™ nozzle

## Blowers

### ELIET BL 360



Ventury Jet™.....	Yes
Airflow.....	50 m <sup>3</sup> /min / 1765 ft <sup>3</sup> / min
Air speed.....	200 km/h / 124 mph
Noise Lw(A).....	100 dB (A)
Adjustable blow direction.....	Lateral & frontal
Weight.....	38 kg / 83 lbs

ART.	VERSION	
MA 012 010 230	<b>BL 360</b>	5.0 HP Honda GP160
MA 012 010 205	<b>BL 360</b>	5.5 HP Honda GX160
MA 012 010 802	<b>BL 360 E-Power</b>	4.5 HP battery 56V DC (3200 W)

### ELIET BL 450 E



Ventury Jet™.....	Yes
Airflow.....	108 m <sup>3</sup> /min / 3813 ft <sup>3</sup> / min
Air speed.....	260 km/h / 161 mph
Noise Lw(A).....	106 dB (A)
Adjustable blow direction.....	Lateral & frontal
Weight.....	60 kg / 132 lbs

ART.	VERSION	
MA 013 010 207	<b>BL 450 E</b>	9.0 HP Honda GX270




SCAN ME



**VENTURY Jet** *effect*™  
ELIET NV

#### VENTURY JET™

Because of the Ventury Jet™, the airflow is accelerated at the bottom of the blower nozzle, allowing wet sticky leaves to be blown loose with ease. Due to the negative pressure created, even loose leaves lying below the blower nozzle, i.e. just out of reach of the airflow, are still blown away.

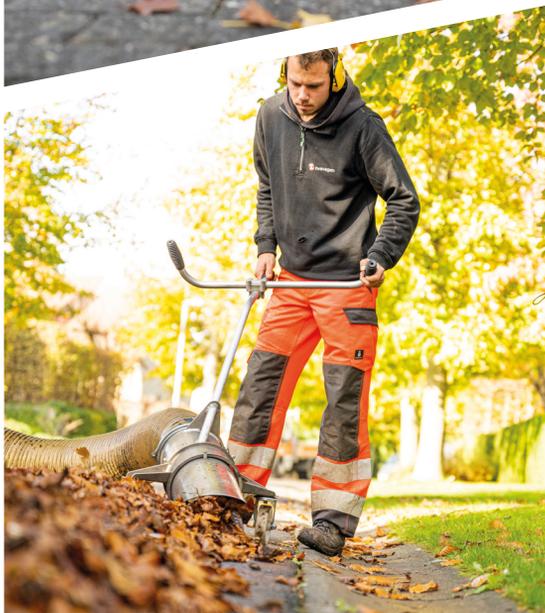

## BIG HANDS™ MULTIFUNCTIONAL GRIPPER

### BIG HANDS™

With this ELIET gripper you can clear all your green waste in no time in an efficient and ergonomic way. The gripper has a light weight (2.1 kg) and is very easy to operate. This allows you to quickly clear large volumes of leaves, moss, grass,... without having to make physically heavy efforts.

- ▶ With the Big Hands™, you pick up all kinds of green waste (moss, leaves, hedge trimmings,...) from the ground without bending over, allowing you to work from an ergonomic position and eliminating back strain.
- ▶ The 34 cm wide gripping plates make the use of a shovel or dustpan unnecessary.
- ▶ The gripping plates can scrape along the ground while gripping, thereby fulfilling the function of a brush or rake.
- ▶ Large volumes can be clamped and picked up in one grip which is time-saving.
- ▶ The Big Hands™ are made entirely of aluminium and weigh only 2.1 kg so are not straining arm muscles in use.
- ▶ The Big Hands™ are robustly built for long life. Parts can be replaced individually.
- ▶ Rubber handles offer a comfortable hand feel.
- ▶ The Big Hands™ stores compactly.



More info?

[www.elietsbighands.com](http://www.elietsbighands.com)





#### REGISTRATION

Contact your nearest ELIET dealer for more information.

[WWW.ELIET.EU](http://WWW.ELIET.EU)



#### ELIET AT YOUR SERVICE

At ELIET, we not only attach great importance to the development of our machines and related technologies. We want to support our customers as much as possible before and after they have purchased an ELIET machine. You can access all brochures, manuals and technical data sheets of the ELIET machines via our website [www.eliyet.eu](http://www.eliyet.eu).

You can also find out which authorized ELIET dealer you can contact in your area for expert advice and professional maintenance of all ELIET machines. These official service centers also have the original ELIET parts.

ELIET. Always at your service.





**ELIET STANDS FOR BELGIAN RELIABLE QUALITY AND DURABILITY.**

Although you have no doubt about it, before purchasing a professional ELIET machine you would like confirmation that it is suitable for your application.

You can!

An enthusiastic ELIET demo team is on the road every day with an extensive fleet of machines. They will be happy to come to you without any obligation to prove to you in a practical test in your own working environment that the ELIET machine meets your requirements.

**ASK FOR YOUR DEMO ON ELIET ON TOUR.**



# Shredder

## ELIET PROF 6 E-POWER

E

Shreddable timber diameter.....	100 mm
Blades.....	24 x Resist™/8 units
Capacity (wheelbarrows/h).....	4 m³
Engine.....	Elektro DC - 7,5 kW
Battery.....	Li-Ion 48V - 7.0 kW
In feed.....	Hydraulic feed roller / Ø 150 mm
Feed control.....	ABM™
Discharge system.....	Turbo Discharge™ / Ø 325 mm
Drive.....	Yes - hydraulic
Weight.....	On Wheels 405 kg / 892 lbs   Cross Country 470 kg / 1036 lbs
Dimensions.....	1780 x 830 x 1520 mm

ART.	VERSION	
MA 032 010 821	Prof 6 E-Power On Wheels	7.0 kW - 48V Vanguard (Eco Eye™)
MA 032 020 821	Prof 6 E-Power Cross Country	7.0 kW - 48V Vanguard (Eco Eye™)
BE 222 001 480	Charger 1050 W	
BE 222 001 481	Charger 3000 W	
MA 032 040 000	PROF 6 PTO - ABM	
MA 032 001 002	Infeed Speed Controlvalve	
MA 029 001 004	Lifting hook (Prof 6/ Superprof)	
MA 029 001 006	Chip catcher (not PTO)	
BU 401 300 202	Set of spare blades RESIST/8 (24 units)	



## ECO EYE™

The Prof 6 E-Power is equipped with ELIET Eco Eye™ technology. This system automatically switches off the electric motor when no one is loading the machine and the hopper has run empty. When the operator approaches the machine again, the system switches on automatically. This maximizes service life and autonomy.



## VANGUARD BATTERY POWER

### VANGUARD BATTERY-POWER

*Vanguard is known among landscape gardeners as a manufacturer of quality gas engines for professional and demanding applications. As a supplier of traction systems, Vanguard has also expanded its range to include battery solutions and is aiming for reference status on the market in this field too.*



### HEAVY DUTY DESIGN

Vanguard batteries are made from the best possible cells for energy density. A robust cast aluminum housing keeps the cells dry, dust-free and protects against deformation. Operational safety and efficient cooling are guaranteed by its cell design and arrangement, even under load. This makes the batteries ideal for use in gardening and landscaping.

### INTELLIGENT SELF-MANAGEMENT

- ▶ Vanguard batteries have an internal cell management system that controls the energy flow of the battery. Temperature monitoring and discharge capacity measurements are used to adjust the currents of the cell strings accordingly. This ensures optimal performance and maximum battery life.
- ▶ With the optional quick charger, a discharged battery can be fully recharged within 4 hours.



# Shredder

## ELIET MAESTRO COUNTRY E-POWER

E

Shreddable timber diameter.....	45 mm
Chopping speed (Cuts/min.).....	ECO 36000   TURBO 43000
Capacity (wheelbarros/h).....	14
Blades.....	12 RESIST™/6
Weight.....	61 kg (without batteries)
Engine power.....	3200 W
Battery.....	Lithium-Ion
Battery power.....	56 V (DC)
Battery compartments.....	2

ART.	VERSION	
MA 001 053 801	Maestro Country E-Power	4.5 HP battery 56V DC (3200 W)
MA 001 052 001	Multi purpose grating for wet green waste (option)	
MA 001 001 051	Li-ion battery (option) 56V - 5Ah	
MA 001 001 052	Li-ion battery (option) 56V - 10Ah	
MA 001 001 050	Charger for Li-ion battery (option)	
BU 401 100 102	Set of spare blades RESIST™/6 (12 units)	

## 2 MODES

### ECO-MODE

In ECO mode, shredded material is produced that is very suitable as a mulch layer in the garden. This has bigger chips. The lower shredding speed in ECO mode ensures greater autonomy with lower power consumption.



### TURBO-MODE

In TURBO mode, shredding is carried out at full speed to obtain chips that compost the fastest because they are particularly fine.



### CHOPPING PRINCIPLE™

The strength of the ELIET Maestro lies in its unique, patented shredding technology. With the ELIET Chopping Principle™, the blades split the wood in the direction of the grain like an axe. The shredded material is reduced to small chips through a cycle of splitting and shredding.



# Blower

## ELIET BL360 E-POWER


E

Ventury Jet™	.....	Yes
Airflow	.....	50 m³ / min.
Air speed	.....	200 km / Std.
Noise Lw (A)	.....	100 dB (A)
Adjustable blow nozzle	.....	Yes
Weight	.....	38 kg
Wheels	.....	Pneumatic Tire Ø 300 mm/ 4.00-4
Engine power	.....	3200 W
Battery	.....	Lithium-Ion
Battery power	.....	56 V (DC)
Battery compartments	.....	2

ART.	VERSION	
MA 012 010 802	<b>BL 360 E-Power</b>	4.5 HP Li-ion 56V DC (3200 W)
MA 001 001 051	Li-ion battery (option) 56V - 5Ah	
MA 001 001 052	Li-ion battery (option) 56V - 10Ah	
MA 001 001 050	Charger for Li-ion battery (option) <b>(CH5500E)</b>	

### OPTIMAL COMFORT

The BL360 E-Power combines the best of two worlds. Firstly, the machine has a large turbine, which enables it to generate a large air flow at lower speeds (i.e. less noise). This is necessary to move large quantities of leaves. At the same time, the machine is compact, handy and maneuverable, but has its mass on the ground. It is easy to move on large pneumatic tires. The specially shaped discharge nozzle is adjustable and can direct the air flow either forwards or to the side. The nozzle sits close to the ground, and thanks to the Ventury Jet™ effect, even sticky leaves can be easily blown away.

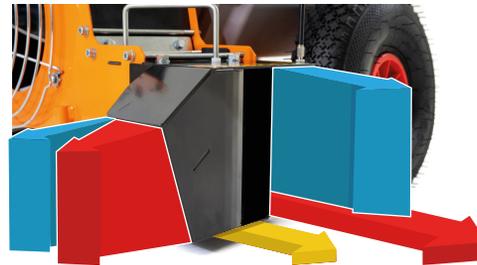

# Edge Cutter

ELIET KS300PRO E-POWER

E

Blade speed .....	2550 t/min
Blade .....	Ø 300 mm - 12" (50SICR7 )
Blade spindle .....	double bearing Ø 40
Angle adjuster .....	0° - 25° - 45°
Cutting depth adjuster .....	5 positions   max. 110 mm
Weight .....	37 kg
Height adjustable handle .....	7 Positions
Engine power .....	3200 W
Battery .....	Lithium-Ion
Battery power .....	56 V (DC)
Battery compartments .....	2

ART.	VERSION
MA 010 020 802	KS 300 PRO E-Power 4.5 HP 56V (3200 W)
MA 010 001 003	Double front wheels KS 300 PRO / HD
MA 010 001 003	8 teeth cutting disk KS 300 PRO (Mn-steel) (Ø 300 mm - 12")
BU 103 200 200	Spare blade (Ø 300 mm)
MA 001 001 051	Li-ion battery (option) 56V - 5Ah
MA 001 001 052	Li-ion battery (option) 56V - 10Ah
MA 001 001 050	Charger for Li-ion battery (option) (CH5500E)



## BLADE DIAMETER 300 MM

The KS300PRO E-Power has a blade with a diameter of 300 mm - 12". This is the largest blade for side walk edgers of this type on the market. It allows you to achieve a greater cutting depth and a higher cutting speed. For professionals, ELIET also recommends the optional 8-tooth blade.



## ANGLE ADJUSTMENT

# Self-Propelled (ZR)

## Scarifier / Detatcher

### ELIET E450ZR E-POWER

E

Operating width.....	.....450 mm
Blades.....	.....Double-Cut™ Messen   Lames Double-Cut™ (54 st.   pcs.)
Drive.....	.....rubberen tractierol   rouleau de traction Ø 150 mm
Driving speed.....	.....2,5 km/h
Weight.....	.....85 kg
Dimensions.....	.....1230 x 630 x 1050 mm
Permanently Sharp Blades™.....	.....Ja, min. 100 uur   Oui, min. 100 hr
Engine power.....	.....3200 W
Battery.....	.....Lithium-Ion
Battery power.....	.....56 V (DC)
Battery compartments.....	.....2

ART.	VERSION	
MA 037 010 802	<b>E450ZR E-Power</b>	4.5 HP battery 56V DC (3200 W)
MA 017 001 001	Easy clean (option)	
BU 402 100 454	Set of spare E450ZR Double-Cut blades (54 units)	
MA 001 001 051	Li-ion battery (option) 56V - 5Ah	
MA 001 001 052	Li-ion battery (option) 56V - 10Ah	
MA 001 001 050	Charger for Li-ion battery (option) (CH5500E)	



### DRIVE

The ELIET E-ZR scarifiers are self-propelled. You can engage the traction drive using the control lever on the handlebar. The travel speed is set to 2.5 km/h. The constant speed guarantees an even scarifying result and a defined hourly output.



### DOUBLE-CUT™-BLADES

The permanently sharp Double-Cut™ blades intensively remove thatch from the turf. The blades are mounted in pairs on an aluminum carrier on the blade axle. This allows the blades to be replaced very quickly and easily.



### COUNTER-ROTATING BLADES

The blades of the E-ZR series rotate against the direction of travel. This allows the blades to remove all impurities from the lawn much more thoroughly. This ensures an unbeatable scarifying effect.

# Scarifier / Detacher

## ELIET E450 E-POWER


E

Operating width.....	450 mm
Double-Cut blades (number   thickness).....	28   1,5 mm
Cutting depth adjuster.....	rear + front
Vertical belt tensioner™.....	Yes
Weight.....	51 kg
Dimensions.....	1100 x 600 x 1050 mm
Permanently Sharp Blade™.....	Yes, min. 100 Std.
Engine power.....	3200 W
Battery.....	Lithium-Ion
Battery power.....	56 V (DC)
Battery compartments.....	2

ART.	VERSION
MA 025 030 802	<b>E450 E-Power</b> 4.5 HP battery 56V DC (3200 W)
BU 402 300 203	Set of spare Double-Cut blades (28 units)
MA 001 001 051	Li-ion battery (option) 56V - 5Ah
MA 001 001 052	Li-ion battery (option) 56V - 10Ah
MA 001 001 050	Charger for Li-ion battery (option) <b>(CH5500E)</b>

### VERTICAL BELT TENSIONER™

ELIET uses its proven vertical belt tensioner™ to switch on the blades. The motor is lifted when the blades are switched on, tensioning the drive belt without the need for an idler pulley. This minimizes wear and the risk of belt failure and makes the machine extremely reliable in operation.



### PERMANENTLY SHARP BLADES™

The special processing of the blades ensures a self-sharpening effect. The blade tip remains sharp and the effectiveness of the gripping force does not decrease. The cutting efficiency therefore always remains constant.



# Battery technology **ELIET**<sup>®</sup>



The integrated EGO drive system of the ELIET E-Power machines is a combination of a 3200 W brushless DC motor and a battery dock. Two EGO 56 V lithium-ion batteries are inserted into the battery dock. This makes it possible to connect a wide range of EGO batteries with different capacities from 2.5 Ah to 12 Ah can be connected. The customer can choose depending on the application.

## **POWERFUL ELECTRIC MOTOR**

The EGO drive unit consists of a brushless DC motor with an output of 3200 W (or 4.3 HP). This has a very uniform power development over a wide speed range. The speed can be continuously adjusted between 1700 and 3600 rpm on the dashboard. The unit is equipped with an hour counter as standard. To guarantee optimal conditions, cooling takes place via an air filter.

## **EFFICIENT BATTERIES**

The 56V EGO-Arc lithium battery has an intelligent energy management system. This constantly monitors and optimizes each individual cell to ensure the best possible power output. The innovative arc structure enables the cells to release their heat better into the environment. This protects the battery from overheating. In addition, each cell is surrounded by the innovative Keep Cool™ technology. This ensures that the cells maintain their optimal temperature, resulting in a longer service life and even better performance.

## **MULTI-PORT CHARGING CASE CHU6000**

Charge up to six 56 V ARC lithium batteries simultaneously with your multi-port charging case. This can be done directly with the CHV1600E multi-port charging case from the Professional series.



**1600W FAST CHARGER CHV1600E**



**BA2800T  
5 AH**



**BA5600T  
10 AH**

# Product Range Booklet

## 2025

### Full Range

# ELIET®



MADE IN BELGIUM



All rights reserved - Printed in Belgium.  
Subject to change in the case of technical modifications or misprints.

ELIET Europe NV  
Diesveldstraat 2  
8553 Otegem, BELGIË  
Tel. +32 (0) 56 77 70 88  
Fax. +32 (0) 56 77 52 13  
info@eliet.eu

© 2025 ELIET EUROPE NV

[www.eliet.com](http://www.eliet.com)